


12TW75 SERIES
CHART 2
RELEASE NO. PR-15421
DRAWING NUMBER
X 2
ISSUE
REVISIONS
A C062939
TSK
24 FEB 88
S. J. S. 12 FEB 87
CHECK
DATE
CHECK
DRAWN

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-TOGGLE

CATALOG LISTING
12TW75 SERIES
CHART 2


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

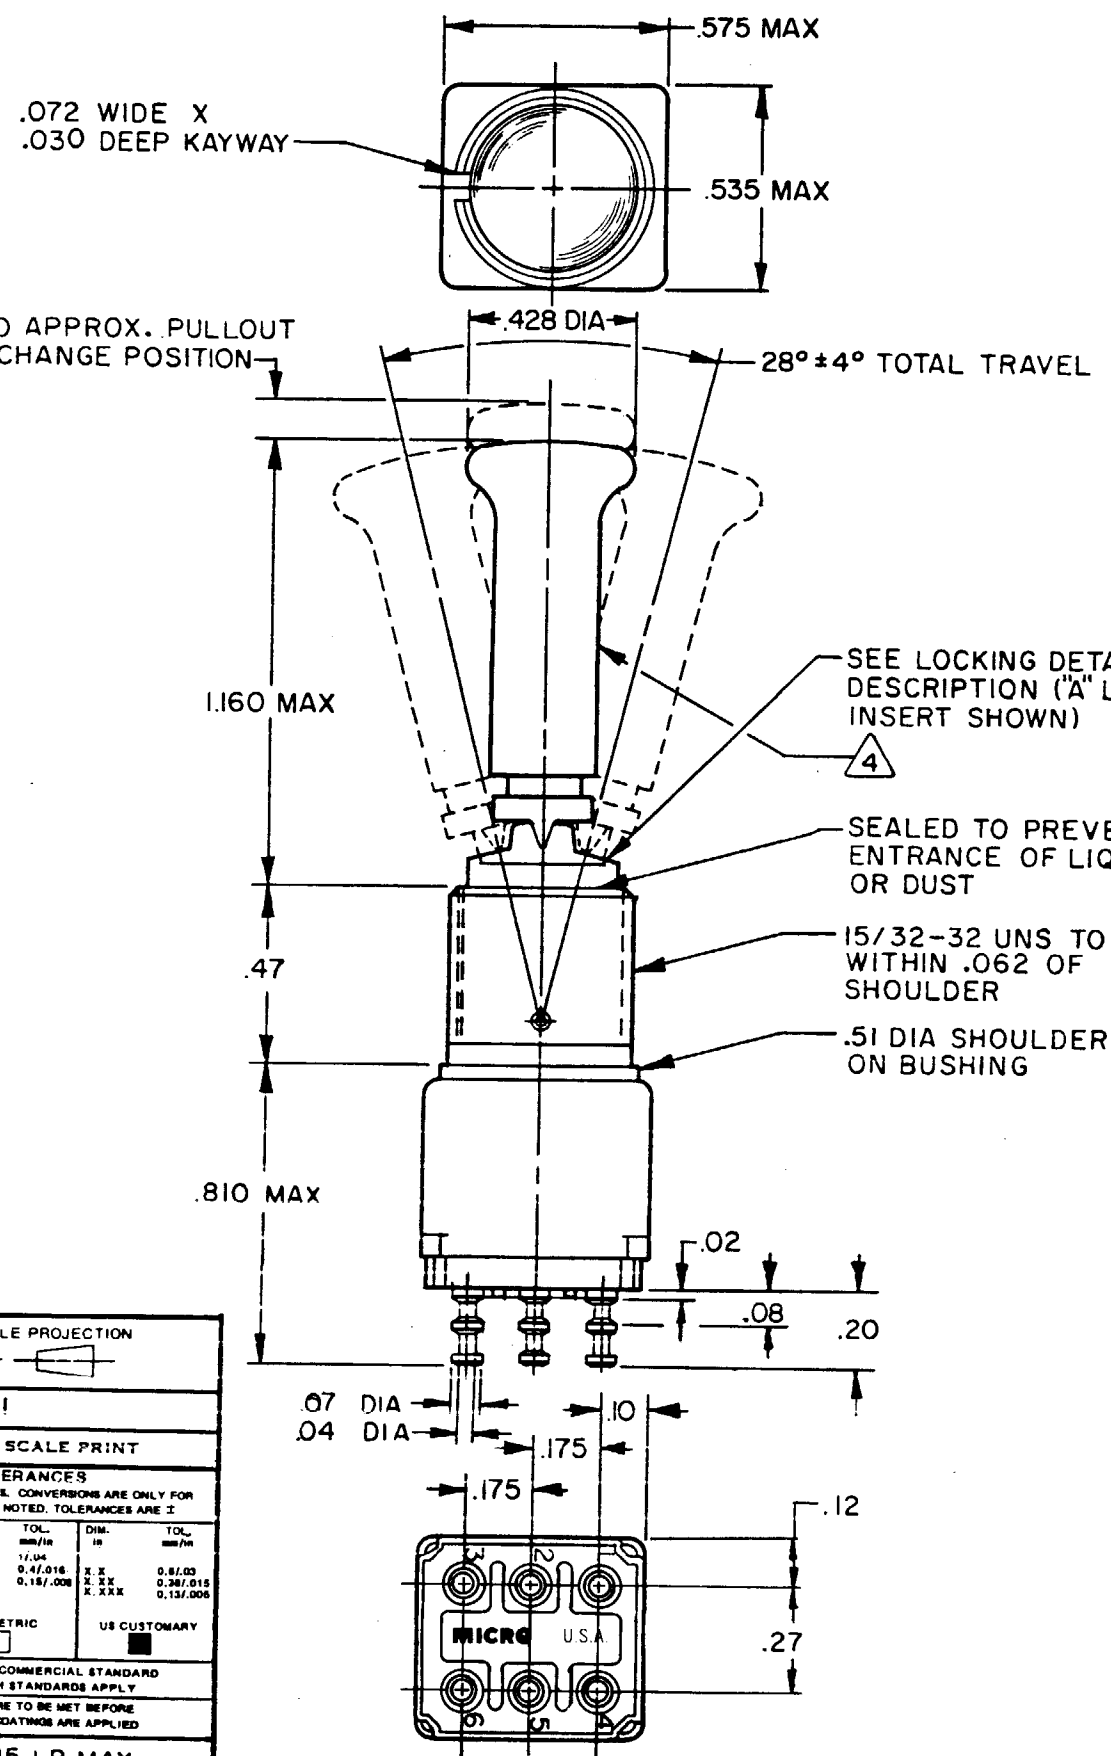

CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN		
		KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)
12TW75-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON
12TW75-2	D,F,G	OFF	NONE	ON
12TW75-3	D,F,G	ON	NONE	ON
12TW75-2I	E,F,K,M	NONE	OFF	ON
12TW75-3I	E,F,K,M	NONE	ON	ON
12TW75-4	F	MOM OFF	NONE	ON
12TW75-5	E,F,K,L,M,N	MOM ON	OFF	ON
12TW75-6	F	MOM ON	NONE	OFF
12TW75-7	E,L,N	MOM ON	OFF	MOM ON
12TW75-8	F	MOM ON	NONE	ON
12TW75-4I	F	NONE	MOM OFF	ON
12TW75-5I	E	NONE	ON	MOM ON
12TW75-6I	E	MOM ON	OFF	NONE

L117
5A 125 VAC
RJ ④

"A" ② LOCKED IN THREE POSITIONS	"B" ② LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" ② LOCKED OUT OF CENTER POSITION	"E" ② LOCKED IN CENTER POSITION	"F" ② LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
"G" ② LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H" ② LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J" ② LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" ② LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L" ② LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
"M" ② LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" ② LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" ② LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)		

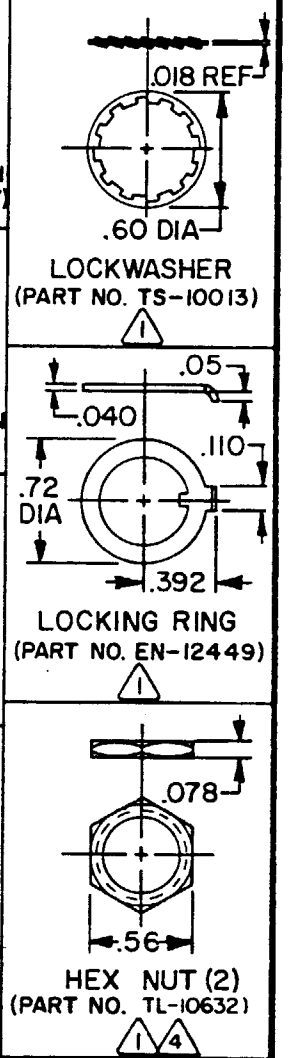

- NOTES
① FURNISHED UNASSEMBLED
② SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING
③ TERMINALS ARE PLATED FOR SOLDERING
④ MATTE FINISH

THIRD ANGLE PROJECTION
SCALE 2:1
DO NOT SCALE PRINT
TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:
DIM. TOL. DIM. TOL.
IN MM/IN IN MM/IN
NO PLACES .005 .005
ONE PLACE .005 .005
TWO PLACES .005 .005
THREE PLACES .005 .005
ANGLES .005 .005
SI METRIC
DESIGN UNITS
RAW MATERIAL—COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED
WEIGHT .045 LB MAX