

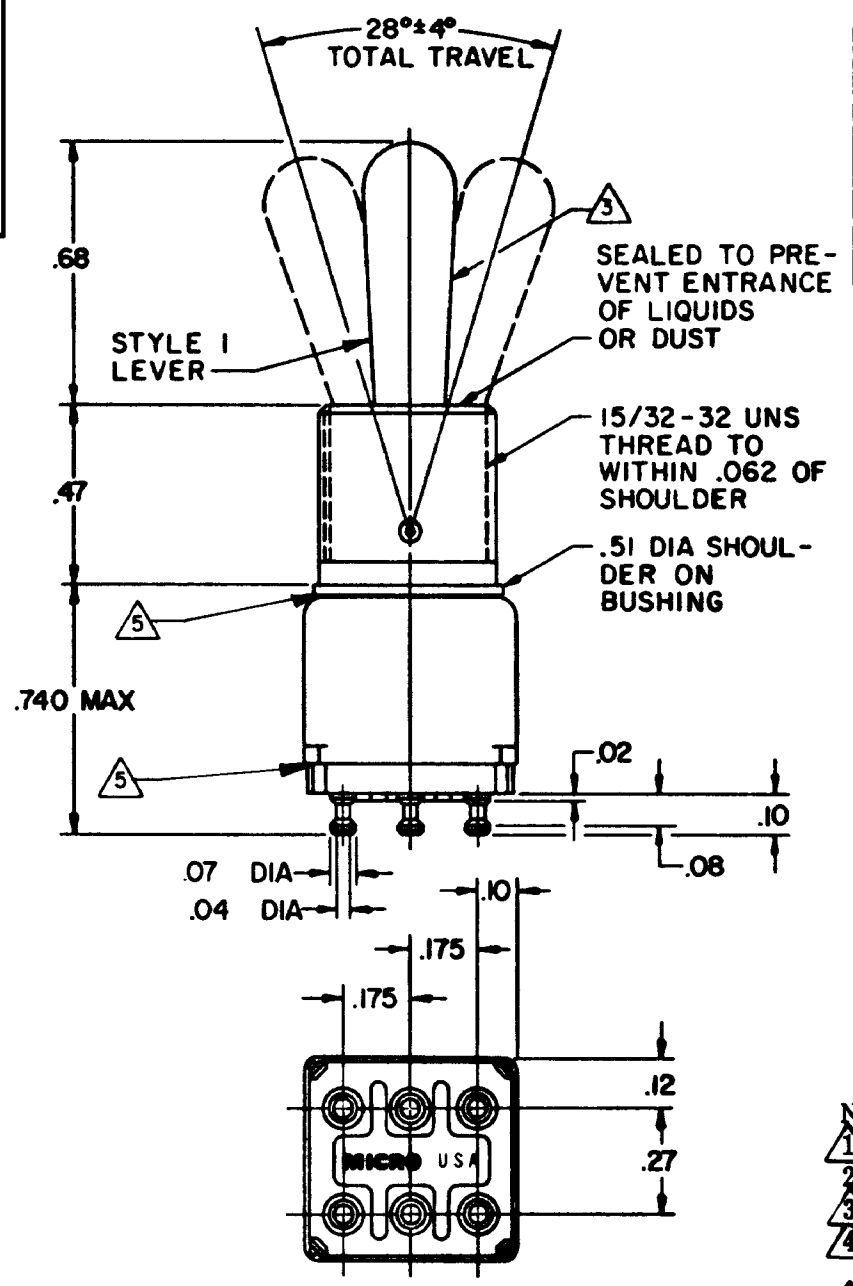
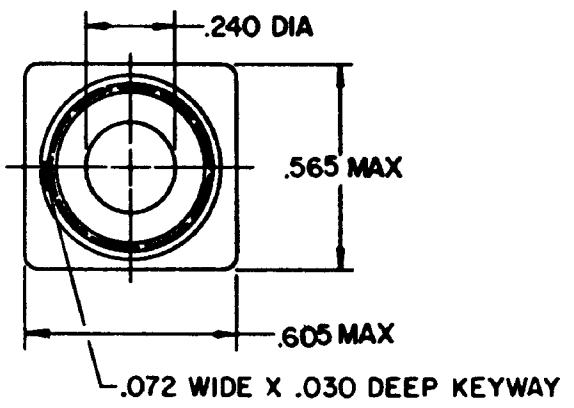
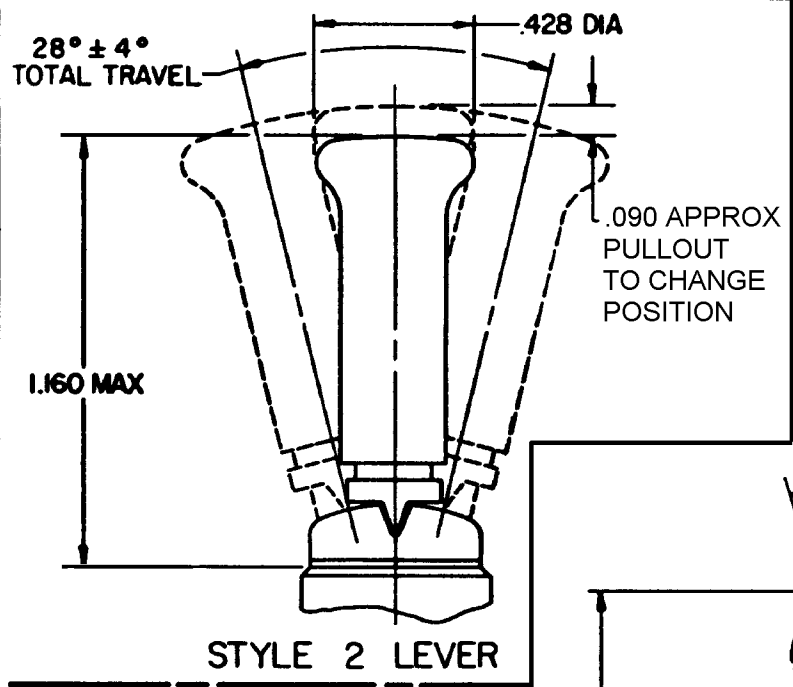
REVISIONS	
A	C050565 CJH 12 DEC 81
B	C058417 K E W 12 DEC 85
C	C061252 JAP 15 MAR 87
C	C062939 YSR 23 FEB 88
D	C063784 L J K 3 DEC 88
E	204999 CSL 13 MAR 02
F	205331 CSL 9 APR 02

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929









SWITCH-TOGGLE

CATALOG LISTING
12TW804-72 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



SCALE 2 TO 1
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES
WEIGHT

MILITARY PART NUMBER		CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	STYLE NUMBER	ELECTRICAL RATING	
		12TW804-72		1	CODE L117	5A-125 VAC
		12TW804-72/4	E, L, N	2		
"A"  LOCKED IN THREE POSITIONS	"B"  LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D"  LOCKED OUT OF CENTER POSITION	"E"  LOCKED IN CENTER POSITION	"F"  LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)	 LOCKWASHER (PART NO. TS-10013)	
"G"  LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H"  LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J"  LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K"  LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L"  LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)	 LOCKING RING (PART NO. EN-12449)	
"M"  LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N"  LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P"  LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)	 HEX NUT (2) (PART NO. TL-10632)			
CIRCUIT MADE WITH TOGGLE LEVER IN						
KEYWAY SIDE		CENTER		OPPOSITE KEYWAY		
						
MOMENTARY POSITION		MAINTAINED POSITION		MOMENTARY POSITION		

- NOTES**
- 1 FURNISHED UNASSEMBLED
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 MATTE FINISH
 - 4 SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
 - 5 JOINTS ARE SEALED WATERTIGHT