

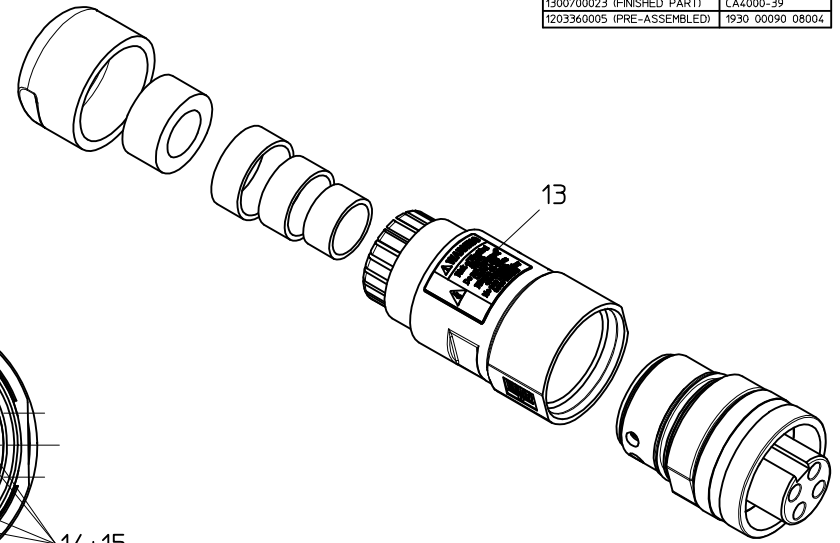
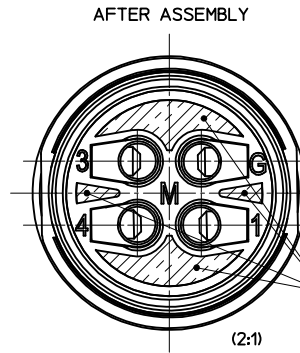
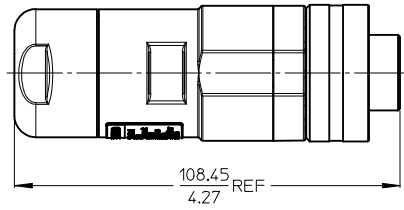


NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. PACKAGING: PART IS PACKED IN CLEAR POLY BAG WITH BARCODE LABEL ATTACHED
4. MATES WITH: BRAD MALE RECEPTACLE
5. WIRE RANGE: 8 AWG - 14 AWG (10mm² - 2.5mm²)
6. CABLE OD RANGE: .48 - .81 (12.2mm - 20.6mm)
7. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V AC
CURRENT RATING:
8 AWG - 25 AMPS
10 AWG - 25 AMPS
12 AWG - 20 AMPS
14 AWG - 15 AMPS
8. ENVIRONMENTAL PROTECTION: IP67, IP69K

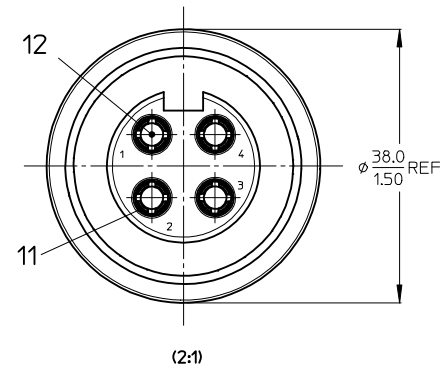

14+15
ULTIMATE HEIGH POTTING MATERIAL
ABOUT 2mm UNTIL UNDER THE EDGE

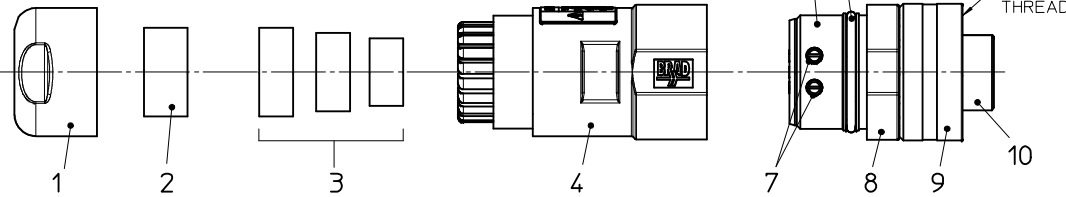

ITEM	QTY	COMPONENT	MATERIAL	FINISH
1	1	NUT M32	PA66	BK
2	1	GASKET MD 14.8x12.25	CR	GY
3	3	GASKETS MD (SMALL,MEDIUM,LARGE)	CR	BK
4	1	HOUSING FA M32	PA66	BK
5	1	INSERT ADAPTER	PA66	BK
6	1	GASKET OR 29x2.5	NBR	BK
7	4	SCREW M4x10	V2A	-
8	1	COUPLING RING	PA66	BK
9	1	NUT, INTERNAL THREAD	AL	AN (NATUR)
10	1	INSERT AC	PVC	-
11	4	SLEEVE	BRASS ALLOY	ZN
12	4	CONTACT 312MM FE	CU ALLOY	AU PLATED
13	1	WARNING LABEL	PLASTIC FILM	-
14	-	POTTING MATERIAL	WEVO RESIN PU 552 FL NATUR 50	-
15	-	MPIS RESIN HARDNER	-	-

ENTER DESCRIPTION EC NO: IPG2013-0945 DRWNR:RSCHIEBER 2013/01/07 CHKD:APOHL 2013/01/09 APPR:CBURGER 2013/06/03	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION ⊙ □		
			mm	INCH	DRAWN BY RSCHIEBER	DATE 2012/10/10	TITLE FA 4P AC FE STR UNSH				
			4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	CHECKED BY APOHL	DATE 2012/10/24					
			2 PLACES ± --- ± .010	1 PLACE ± 0.30 ± ---	APPROVED BY CBURGER	DATE 2012/11/21	molex				
			0 PLACE ± --- ± ---	ANGULAR ±1/2°		MATERIAL NO.					
2	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART		SD-120336-001				1 OF 1		
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								