
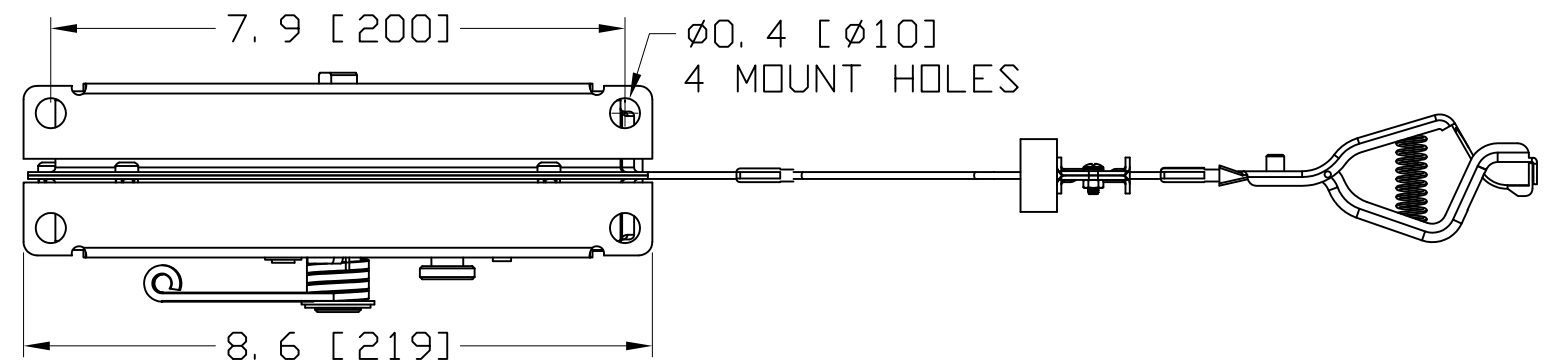
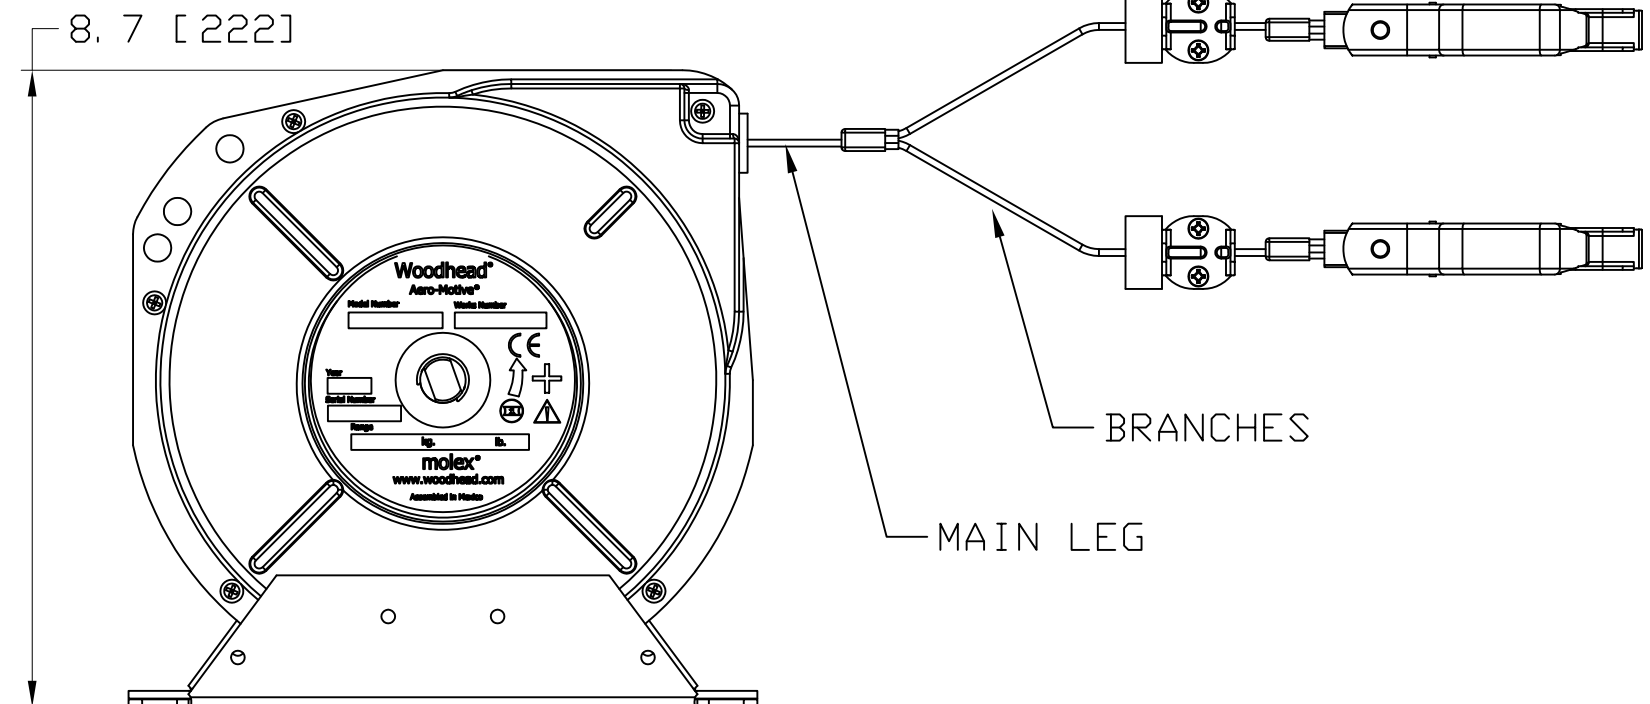
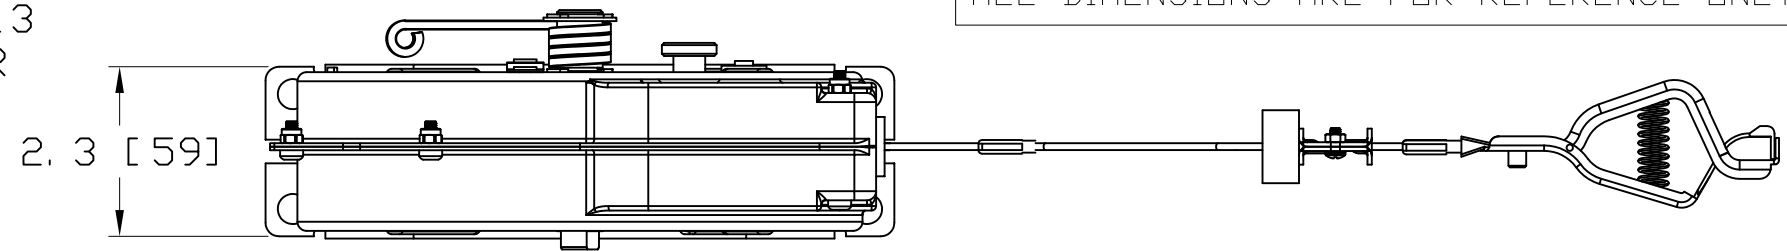


ALL DIMENSIONS ARE FOR REFERENCE ONLY.

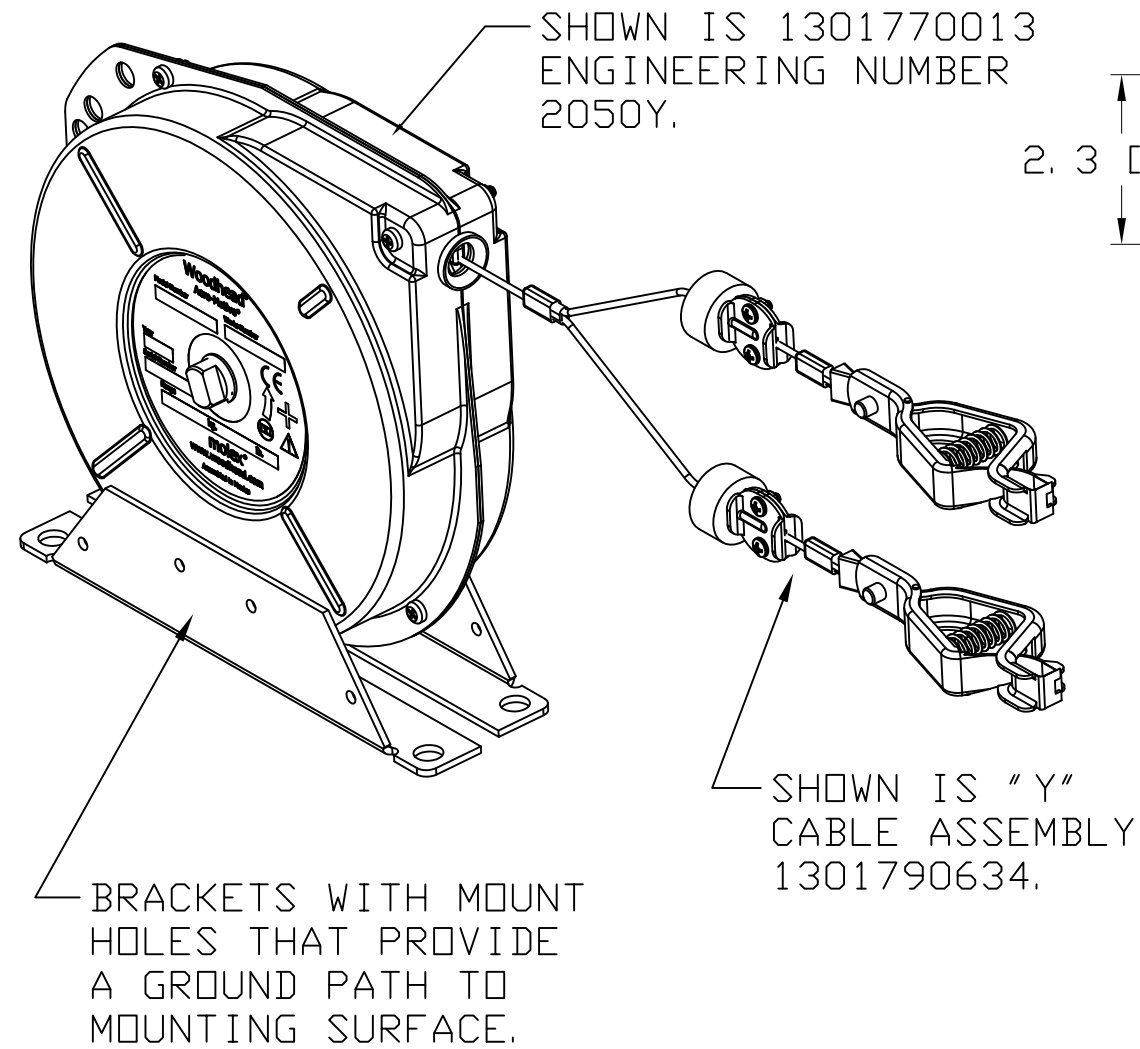



NOTES:

1. STATIC REELS ARE 100% INSPECTED & PRE-TENSIONED AT FACTORY.
2. HOUSINGS ARE MADE OF STEEL WITH POWDER COATING TO MEET HARSH INDUSTRIAL ENVIRONMENTS.
3. ALWAYS READ INSTRUCTIONS MANUAL BEFORE USING STATIC REELS.
4. STATIC REELS PROVIDE LIGHT, CONSTANT SPRING TENSION ON CABLE.
5. STATIC REELS ARE EQUIPED WITH 100A GROUND CLAMP.
6. STATIC REELS HAVE MOUNTING BRACKETS WITH MOUNTING HOLES. WHEN MOUNTING THESE MAKE SURE THAT A GROUND PATH IS AVAILABLE FOR STATIC DISCHARGE.
7. STATIC REELS HAVE THE OPTION OF HAVING A "Y" BRIDLE CABLE ASSEMBLY WITH 2 GROUNDING CLAMPS THAT ALLOW SIMULTANEOUS GROUNDING AT TWO POINTS.
8. STATIC REELS WITH "Y" BRIDLE CABLE ASSEMBLY HAVE A 30FT[9.1M] PAYOUT FOR MAIN LEG & ANOTHER 20FT[6.1M] FOR EACH OF THE BRIDLE'S BRANCHES.

RELEASE TO GSM		EC NO.: WNA2011-0031 DRWN: RHOTCA 2010/08/04 CH'KD: DT APPR: DTTUS 2010/08/23		DESCRIPTION REV	QUALITY SYMBOLS ▽=0 △C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 	
			mm			INCH	DRAWN BY DATE RHOTCA 2010/08/04		TITLE 2050 SERIES STATIC REELS SALES DRAWING ----					
		4 PLACES	±-			±-	CHECKED BY DATE DT 2010/08/04							
		3 PLACES	±-			±-	APPROVED BY DATE DTITUS 2010/08/18							
		2 PLACES	±-			±-	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-130177-001			SHEET NO. 1 OF 3		
		1 PLACE	±-			±-	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
		ANGULAR ±1°												
A		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												

ITEM:	MATERIAL NUMBER:	ENGINEERING NUMBER:	DESCRIPTION:
1	1301794791	9709-545	DRUM & SPRING ASSY FOR 1025/2050 REELS
2	1301790623	9685-4-1	9685-4 STATIC REEL HSNG - POWDER BLUE
3	1302263656	H22520009	MAIN HOUSING ASSEMBLY-LOCK SIDE
4	1301790120	9674-2	SCROLL LOCK LEVER KIT
5	1302344702	9816-2	CAM ZINC PLATED FOR 10FLR
6	1301790129	9733	NYLON WASHER
7	1301790132	9808	SCROLL LOCK RELEASE KNOB
8	1302344673	14099	WASHER -.63 I.D.x.88 O.D.x.02 W - BZP
9	1302344666	13613	GUIDE - CABLE OUTLET
10	1301790092	580-P-30	EXTERNAL CIRCLIP 0.375" SHAFT
11	1302344691	9611-1	MAIN SHAFT SPACER FOR 10F/15F/22F
12	1302344692	9616UK	TENSION LOCK SPRING FOR 10F/15F/22F
13	1302344704	AG10310	RET RING-ANDERTON N1500-62:BZP
14	1301790170	AG18769	SHIM WASHER 16mmODx10mmIDx0.5mmTK
15	1301790170	9813	SHIM WASHER 16mmODx10mmIDx0.5mmTK
16	SEE CHART	SEE CHART	SEE PART NUMBER TABLE FOR USAGE
17	1302344710	AG14612	SCREW M4X10LG Posi PHEAD BZP
18	1302344712	AG14614	SCREW M4X45 LG Posi PHEAD BZP
19	1302344713	AG14615	M4 NYLOC NUT
20	1301790632	651-P-10	CLAMP GROUND FOR 1025 STATIC REELS
21	1302344690	580-P-35	EXTERNAL CIRCLIP 0.625" SHAFT
22	1302344724	AG18723	M4 WHIZZ NUT SERRATED
23	N/A	M1306012X	LABEL IS NOT FOR RESALE PURPOSES.

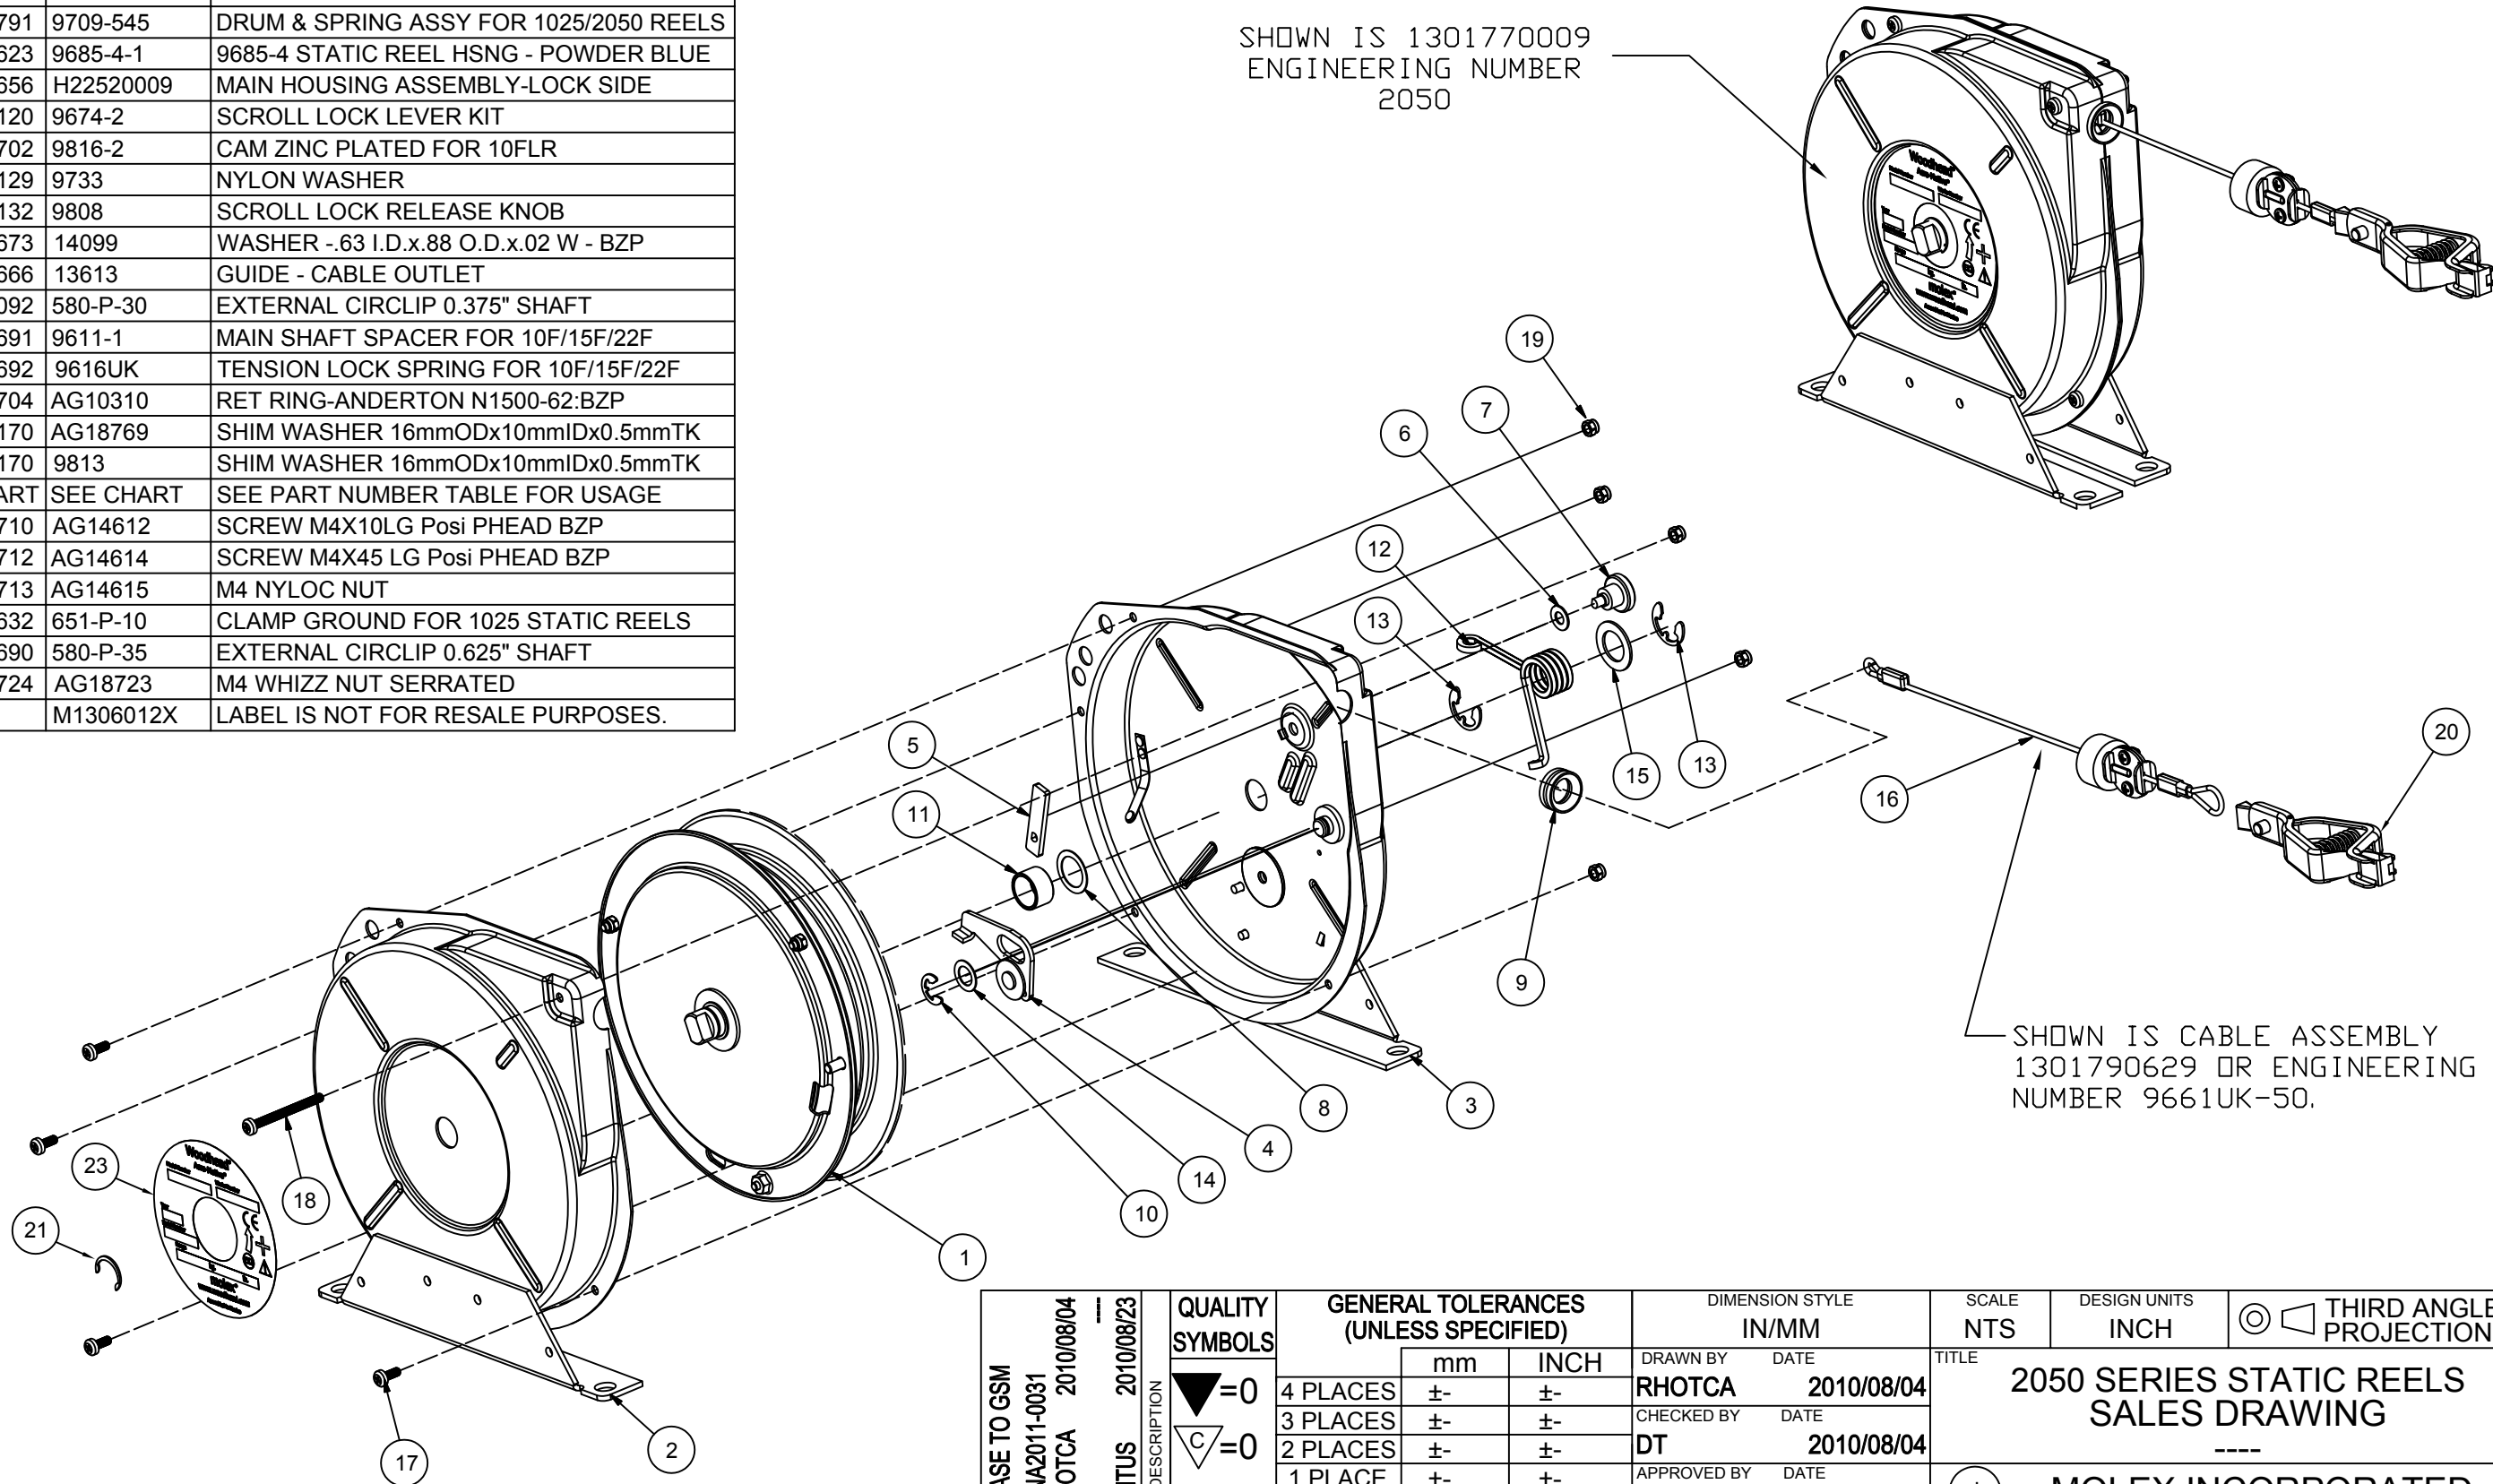

RELEASE TO GSM EC NO: WNA2011-0031 DRWN: RHOTCA 2010/08/04 CHKD: DT APPR: DTTUS 2010/08/23		DESCRIPTION	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
			 =0  =0		mm	INCH	DRAWN BY DATE		TITLE 2050 SERIES STATIC REELS SALES DRAWING ----			
				4 PLACES	±-	±-	RHOTCA 2010/08/04					
				3 PLACES	±-	±-	CHECKED BY DATE					
				2 PLACES	±-	±-	DT 2010/08/04					
				1 PLACE	±-	±-	APPROVED BY DATE					
A		REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±1°		DTITUS 2010/08/18		molex MOLEX INCORPORATED			
					MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-130177-001		SHEET NO. 2 OF 3			
					SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

	10	9	8	7	6	5	4	3	2	1			
F	Material Number:	Engineering Number:	Description:	Weight Range in (KG):	Cable Travel in (M):	Weight Range in (LB):	Cable Travel in (FT):	USES CABLE ASSY:		"R" OHMS:	Color:		
								MATERIAL NUMBER	ENGINEERING NUMBER				
								1301770009	2050			STATIC REEL [12LB/5.44KG] - 50FT[15.3M]	5.44
	1301770011	2050NC	2050 REEL [12LB/5.44KG] W/NYLON CABLE	5.44	15.3	12	50	1301790690	9719UK-50	2	BLUE		
E	1301770013	2050Y	STATIC REEL Y [12LB/5.44KG]-50FT[15.3M]	5.44	15.3	12	30 + 20	1301790634	41071UK-3	2	BLUE		
	1301770011	143050	STATIC REEL W/CABLE ASSY - 50FT[15.3M]	5.44	15.3	12	50	1301790629	9661UK-50	2	BLUE		
	1301770006	143050NC	143050 W/NYLON CABLE ASSY - 50FT[15.3M]	5.44	15.3	12	50	1301790690	9719UK-50	2	BLUE		
	1301770008	143051	STATIC REEL Y[12LB/5.44KG] - 50FT[15.3M]	5.44	15.3	12	30 + 20	1301790634	41071UK-3	2	BLUE		
D											D		
C											C		
B											B		
A	RELEASE TO GSM EC NO: WNA2011-0031 DRWN: RHOTCA 2010/08/04 CHKD: DT APPR: DTITUS 2010/08/23 A			DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
							mm	INCH	DRAWN BY DATE	TITLE			
						4 PLACES	±-	±-	RHOTCA 2010/08/04	2050 SERIES STATIC REELS SALES DRAWING			
						3 PLACES	±-	±-	CHECKED BY DATE				
						2 PLACES	±-	±-	DT 2010/08/04				
						1 PLACE	±-	±-	APPROVED BY DATE	MOLEX INCORPORATED			
						ANGULAR ±1°			DTITUS 2010/08/18	MATERIAL NO. SEE TABLE			DOCUMENT NO. SD-130177-001
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
	10	9	8	7	6	5	4	3	2	1			