

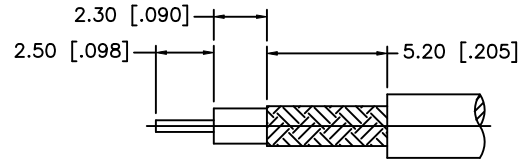
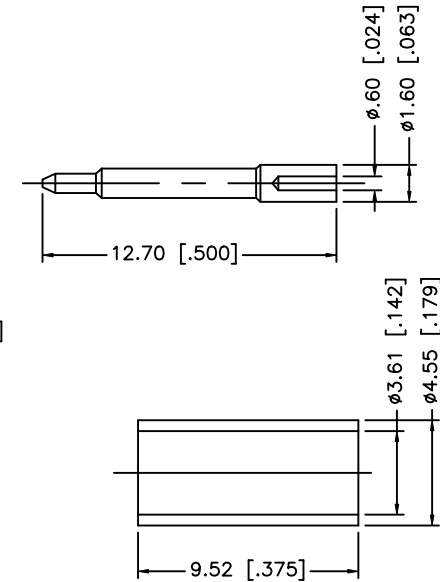


RECOMMENDED
MOUNTING HOLES

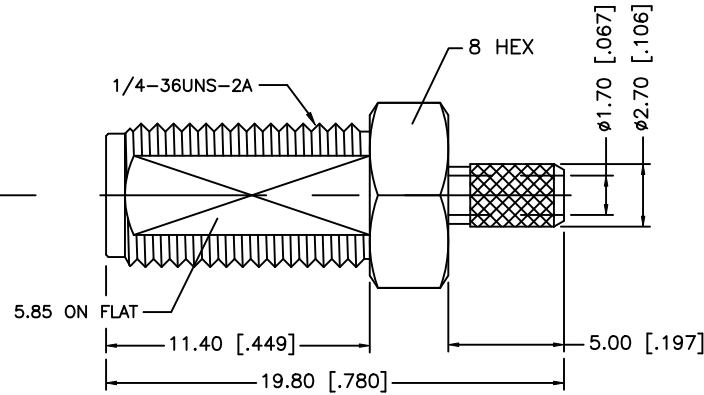

RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
A	04/27/99	-	MODIFY FERRULE/ ADD NOTES 1 AND 2
B	09/29/04	-	MODIFY FERRULE AND CRIMP NOTES
C	09/17/08	-	ADD FLAT TO BODY/ REVISE FERRULE DIMENSIONS/ ADD NOTE 3 REVISE CABLE DESCRIPTION TO 316/U DB CABLE

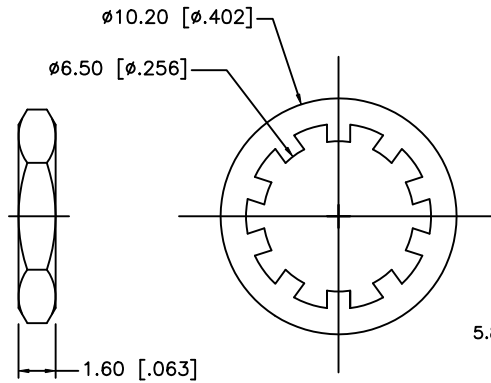

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151" [3.83]
2. CONTACT PIN TO SOLDER.
3. MAX. PANEL THICKNESS OF 3.20 [1.26"]

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
8						DRAWN	GRS	09/17/08							
7	HEAT SHRINK TUBING		BLK		A/R	CHECKED				PART DESCRIPTION SMA REVERSE POLARITY BULKHEAD CRIMP JACK (FOR 316/U DOUBLE BRAID CABLE)					
6	FERRULE	COPPER	GOLD		1	ISSUED									
5	HEX NUT	BRASS	GOLD		1	SHEET		1 OF 1		PART NO. 132176RP					
4	LOCK WASHER	BRASS	GOLD		1	CAD FILE C:/132/132176RP.DWG									
3	CONTACT PIN	BRASS	GOLD		1	DWG. NO.		132176RP.DWG		REV.	NC	SIZE	A	SCALE	NA
2	INSULATOR	PTFE	NATURAL		1										
1	BODY	BRASS	GOLD	1											
DESCRIPTION		MATERIAL	FINISH	QTY											