


REV.	DATE	DESCRIPTION
A	04/04/01	UPDATE STRIPPING AND FERRULE DIMS
B	06/30/05	UPDATE DRAWING FORMAT

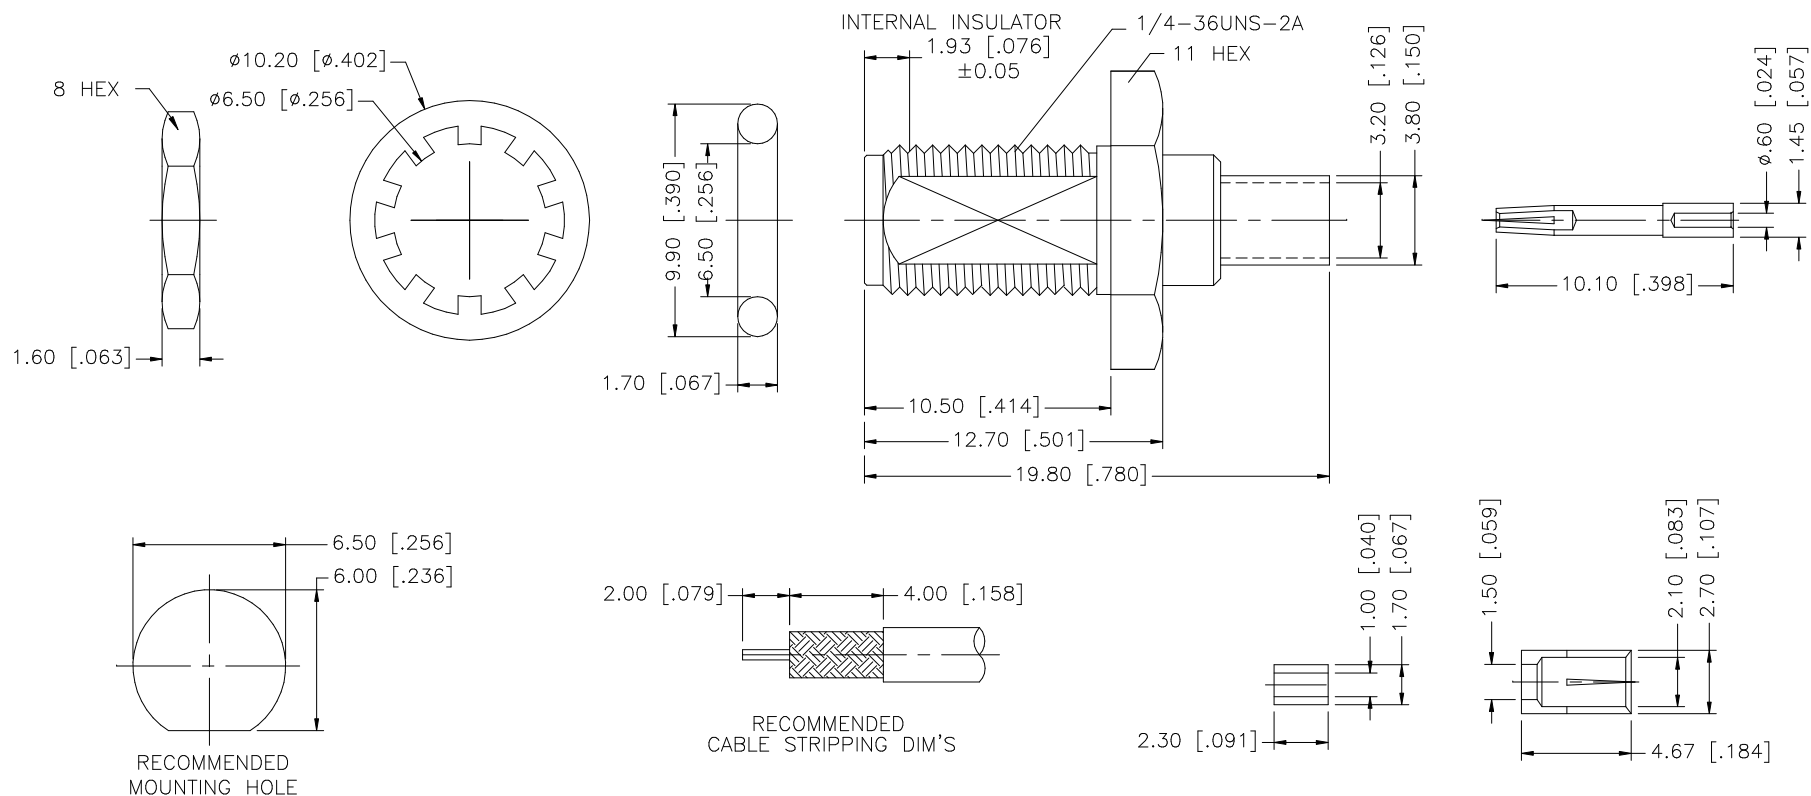

CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
8						DRAWN	G.R.S.	06/30/05								
7	FERRULE	COPPER	GOLD	1		CHECKED										
6	HEX NUT	BRASS	GOLD	1		ISSUED				PART DESCRIPTION						
5	LOCK WASHER	BRASS	GOLD	1		SHEET		1 OF 1		SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-178B/U, 196A/U CABLE)						
4	GASKET	SILICONE	RED	1		CAD FILE		C:/132/132286.DWG		PART NO.						
3	CONTACT PIN	BER. COPPER	GOLD	1		DWG. NO.		132286.DWG		REV.		B	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												