

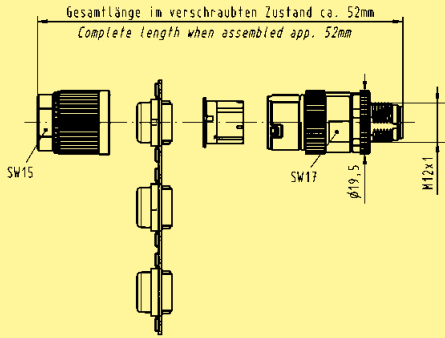


Circular connector M12 shielded, A-coded acc. to IEC 61076-2-101

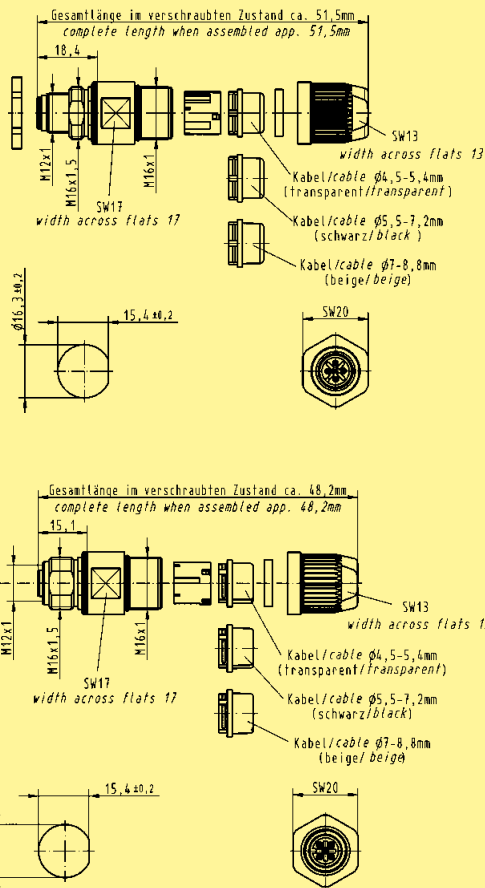

Identification	Male	Female	Drawing	Dimensions in mm
HARAX® M12-L, screened version 4-poles, A-coded 0.14 - 0.34 mm ² / AWG 26 - 22  4-poles, A-coded 0.14 - 0.34 mm ² / AWG 26 - 22 	21 03 221 1405	21 03 221 2405		
HARAX® panel feed-through 4-poles, A-coded 0.14 - 0.34 mm ² / AWG 26 - 22  4-poles, A-coded 0.14 - 0.34 mm ² / AWG 26 - 22 	21 03 321 1425	21 03 321 2425		

Stock items in bold type