
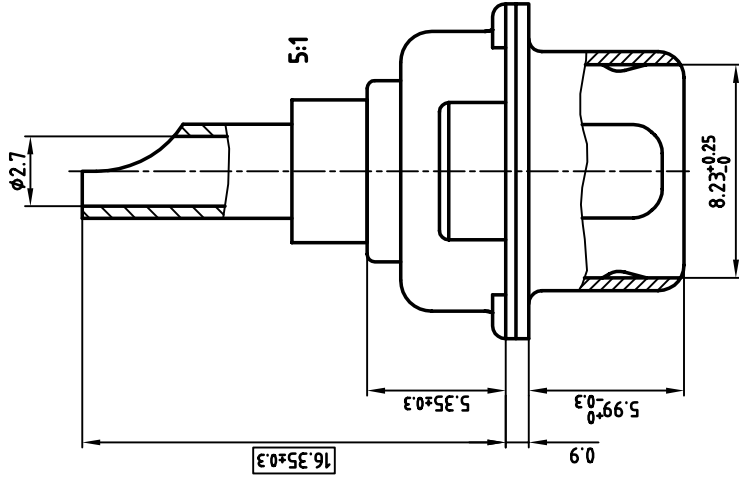

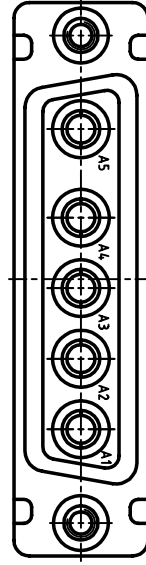
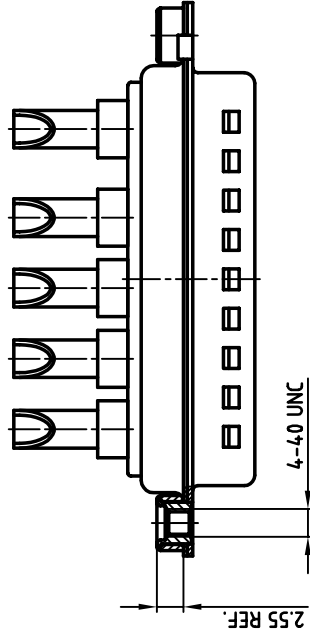


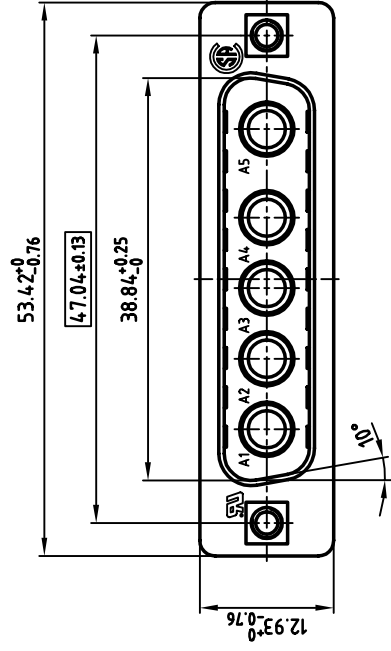

NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. HIGH POWER CONTACTS 20A: COPPER ALLOY
4. PLATING: min. 30μ" HARD GOLD OVER min. 50μ" NICKEL
5. SOLDER CUP ACCEPTS CABLE AWG 12-14
6. THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
7. COLLAR: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
8. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
9. = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH
DO NOT ALTER CAD DRAWING BY HAND

[illegible]