
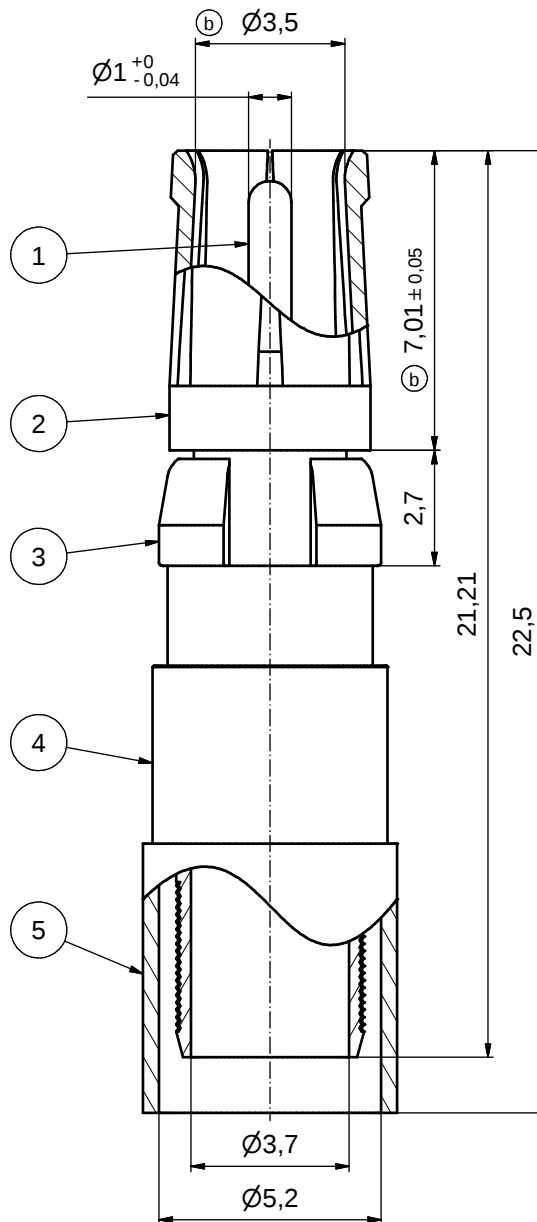
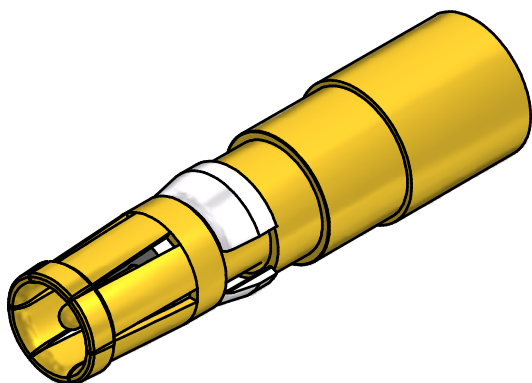


(b) STRIPPING DIMENSIONS

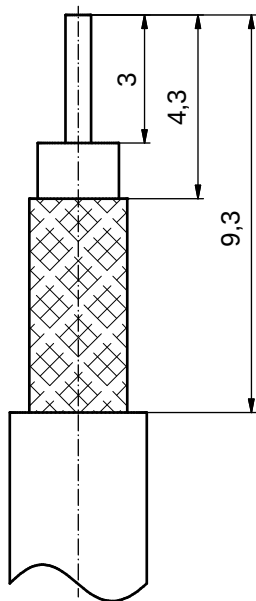

(b) ASSEMBLY TOOLING:

1. CENTER CONTACT:
USE CRIMP TOOL: 360X10329X
WITH TOOL INSERT: 360X11049X
SELECTOR SETTING: 6 (FOR AWG20 CENTER CONDUCTOR OF CABLE)
2. CRIMP FERRULE:
USE CRIMP TOOL: 360X10519X
WITH TOOL INSERT: 360X11029X
INSERT CAVITY A: HEX 5.41/.213

(b)

Part no.	Finish Pos.1	Finish Pos.2	Finish Pos.3	Finish Pos. 4/5
132J21039X	min. 50µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
132A21039X	GOLD FLASH over NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 8:1				
							material: COPPER ALLOY (Pos.1 - 5) (b)				
						date		name		title: COAXIAL CONTACT SOCKET 50 OHM Inner + outer conductor for crimp termination for cable 58CU, 141AU	
						drawn 23.11.06		Schmidt			
						appd. 23.11.06		Mickenbecker			
				norm				dwg no: Inventor 10		DIN-A3	
				d-old						sh: 1	
6 x b		Ä 3774		12.10.10		HS				13K2A037A	
a		Origin									
rev.		description		date		name					
DO NOT ALTER CAD DRAWING BY HAND								part no:		see table	

CONEC