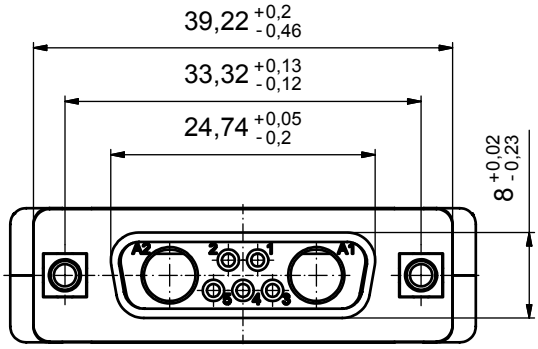

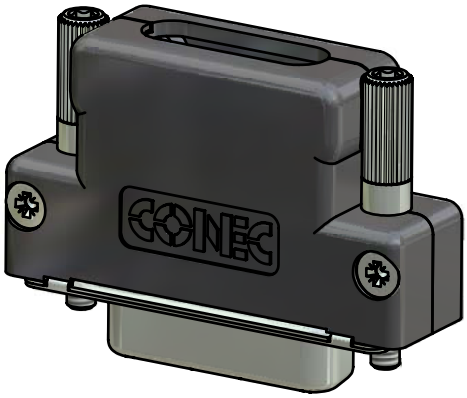

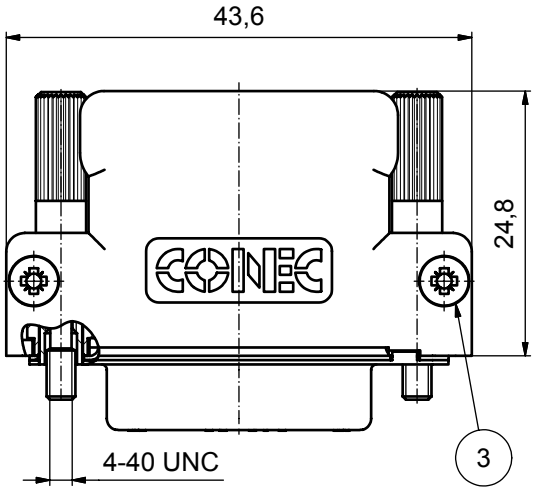

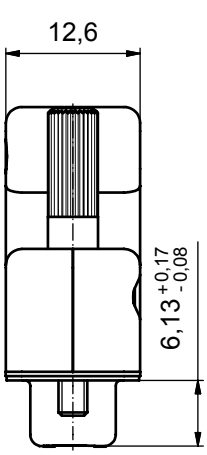

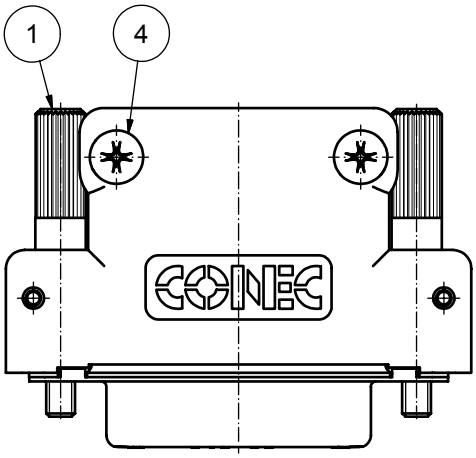

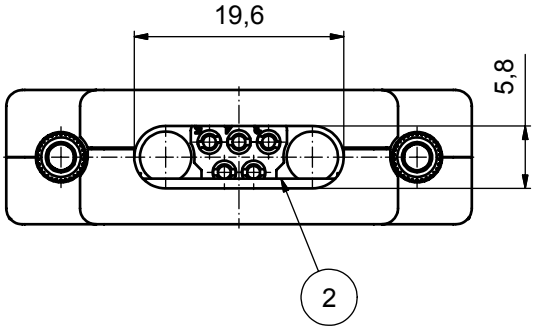

POS. 1

2x JACKSCREW 4-40 UNC
with allen wrench head

POS. 2



1x CABLE STRAIN RELIEF

POS. 3

2x COVER SCREW

POS. 4

2x CABLE STRAIN RELIEF SCREW

NOTES:
1. HOOD: PBT GF UL 94 V0
2. JACKSCREW 4-40 UNC: STEEL; NICKEL PLATED
3. SCREW FOR STRAIN RELIEF: STEEL; NICKEL PLATED
4. COVER SCREW: STEEL; NICKEL PLATED
5. STRAIN RELIEF: STEEL; NICKEL PLATED
6. FEMALE CONNECTOR 7W2, WITHOUT CONTACTS

Directive 2002/95/EC „RoHS" Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance ISO 2768-m

dim. in mm

	date	name
drawn	17.12.07	Schmidt
appd.	17.12.07	Mickenbecker
norm		
d-old		

scale: 2:1

material: see notes

title:

PLASTIC HOOD
with 7W2 Female Crimp Connector
straight cable exit

dwg no: 13K3A2364

Inventor 10

DIN-A3

sh: 1

part no: 13-000370