

HONEYWELL PART NUMBER
13SX47-H58
PRODUCT CODE VDK2837

REV	DOCUMENT	CHANGED BY	CHECK
4	0038449	VS 28APR08	BLR

B




A

A

B

A

PLASTIC PLUNGER

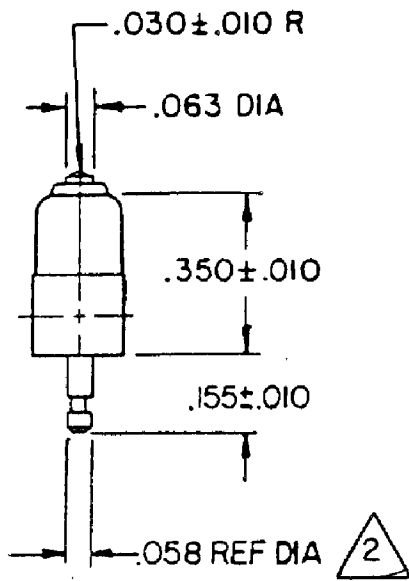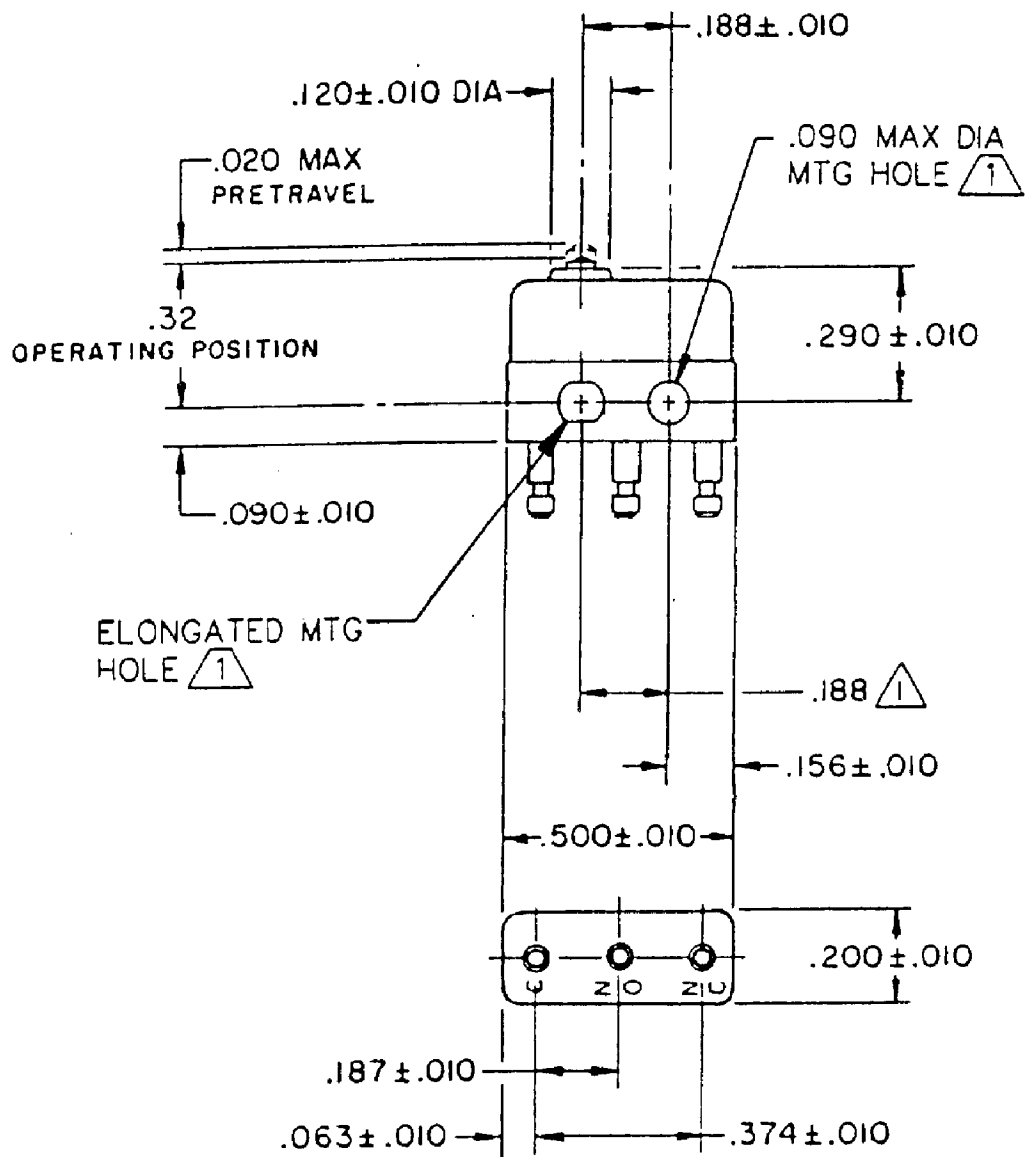

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
- 2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
- 3 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 4 MOVABLE CONTACT MATERIAL - 24K SOLID GOLD ALLOY
- 5 STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR - 16228
REPLACES	X87869 - SX

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 			DRAWN	VK	06 MAR 08		Honeywell					
OPERATING FORCE — — — - 3.5 OZ MAX		CONTACT ARRANGEMENT SPDT						CHECK	RJ	06 MAR 08							
RELEASE FORCE— — — — .75 OZ MIN								THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC					
DIFFERENTIAL TRAVEL— .00010 - .00055																	
OVERTRAVEL — — — — — .004 MIN								APPROVALS				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE
UL, CSA			1A	125 VAC			BRAND		L 22	B	I	13SX47-H58		4			
									RASTER				SCALE	-	WEIGHT .003 LB MAX	SHEET 1 OF 1	