

HONEYWELL
PART NUMBER



13SX48-H58

PRODUCT CODE

VDK2839

REV	DOCUMENT	CHANGED BY	CHECK
4	0038449	VS 28APR08	BLR

PLASTIC PLUNGER

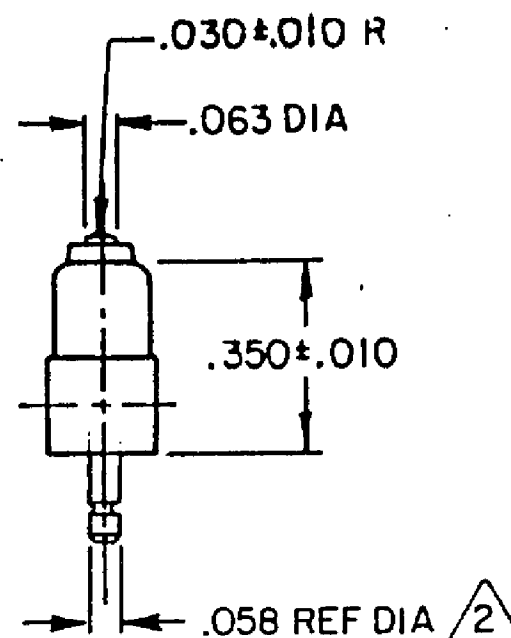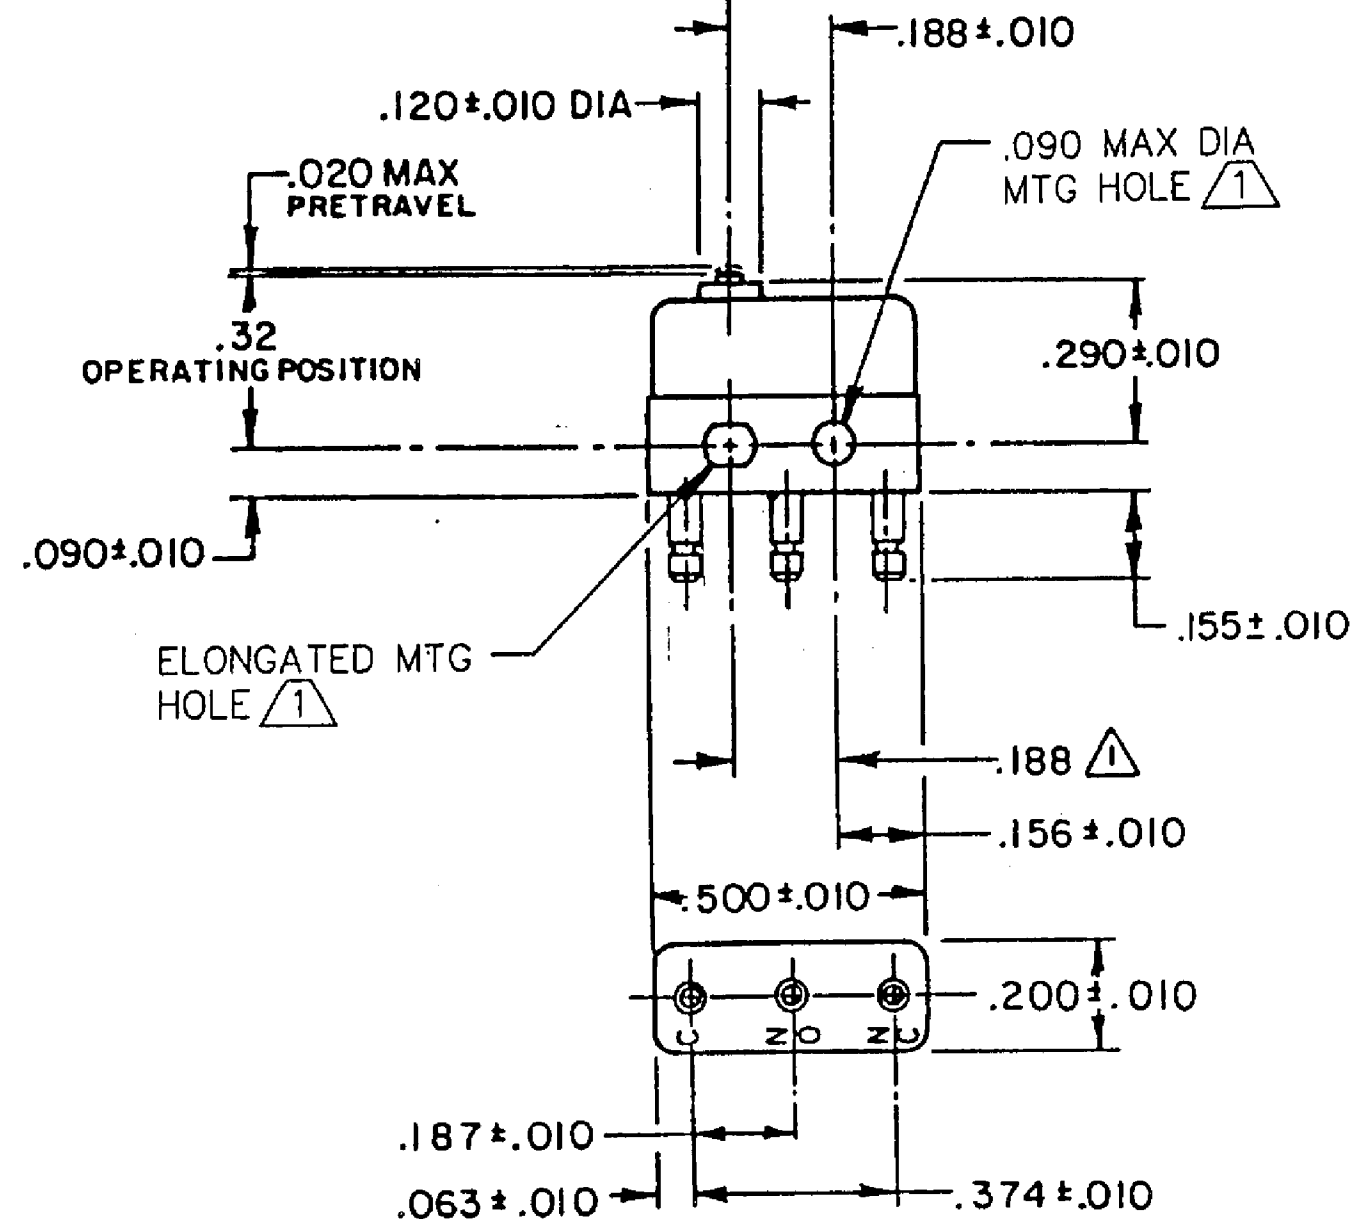

NOTES

- (1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
(2) PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
4 - MOVABLE CONTACT MATERIAL - 24K SOLID GOLD OVERLAY
5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR - 16228
REPLACES	X87870-SX

CHARACTERISTICS

OPERATING FORCE - - - - 3.5 OZ MAX

RELEASE FORCE - - - - .75 OZ MIN

DIFFERENTIAL TRAVEL - .00056 - .00100

OVERTRAVEL - - - - .004 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

APPROVALS

UL, CSA

1A 125 VAC

BRAND
L22

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	
ANGLES		±	

THIRD ANGLE PROJECTION



DRAWN

VK

06 MAR 08

CHECK

RJ

06 MAR 08

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

13SX48-H58

REV

4

SCALE

-

WEIGHT .003 LB MAX

SHEET 1 OF 1