


HONEYWELL PART NUMBER
13SX95-T
PRODUCT CODE VDK2869

REV	DOCUMENT	CHANGED BY	CHECK
5	0060324	VKR 13JAN10	CMH

B

A

A

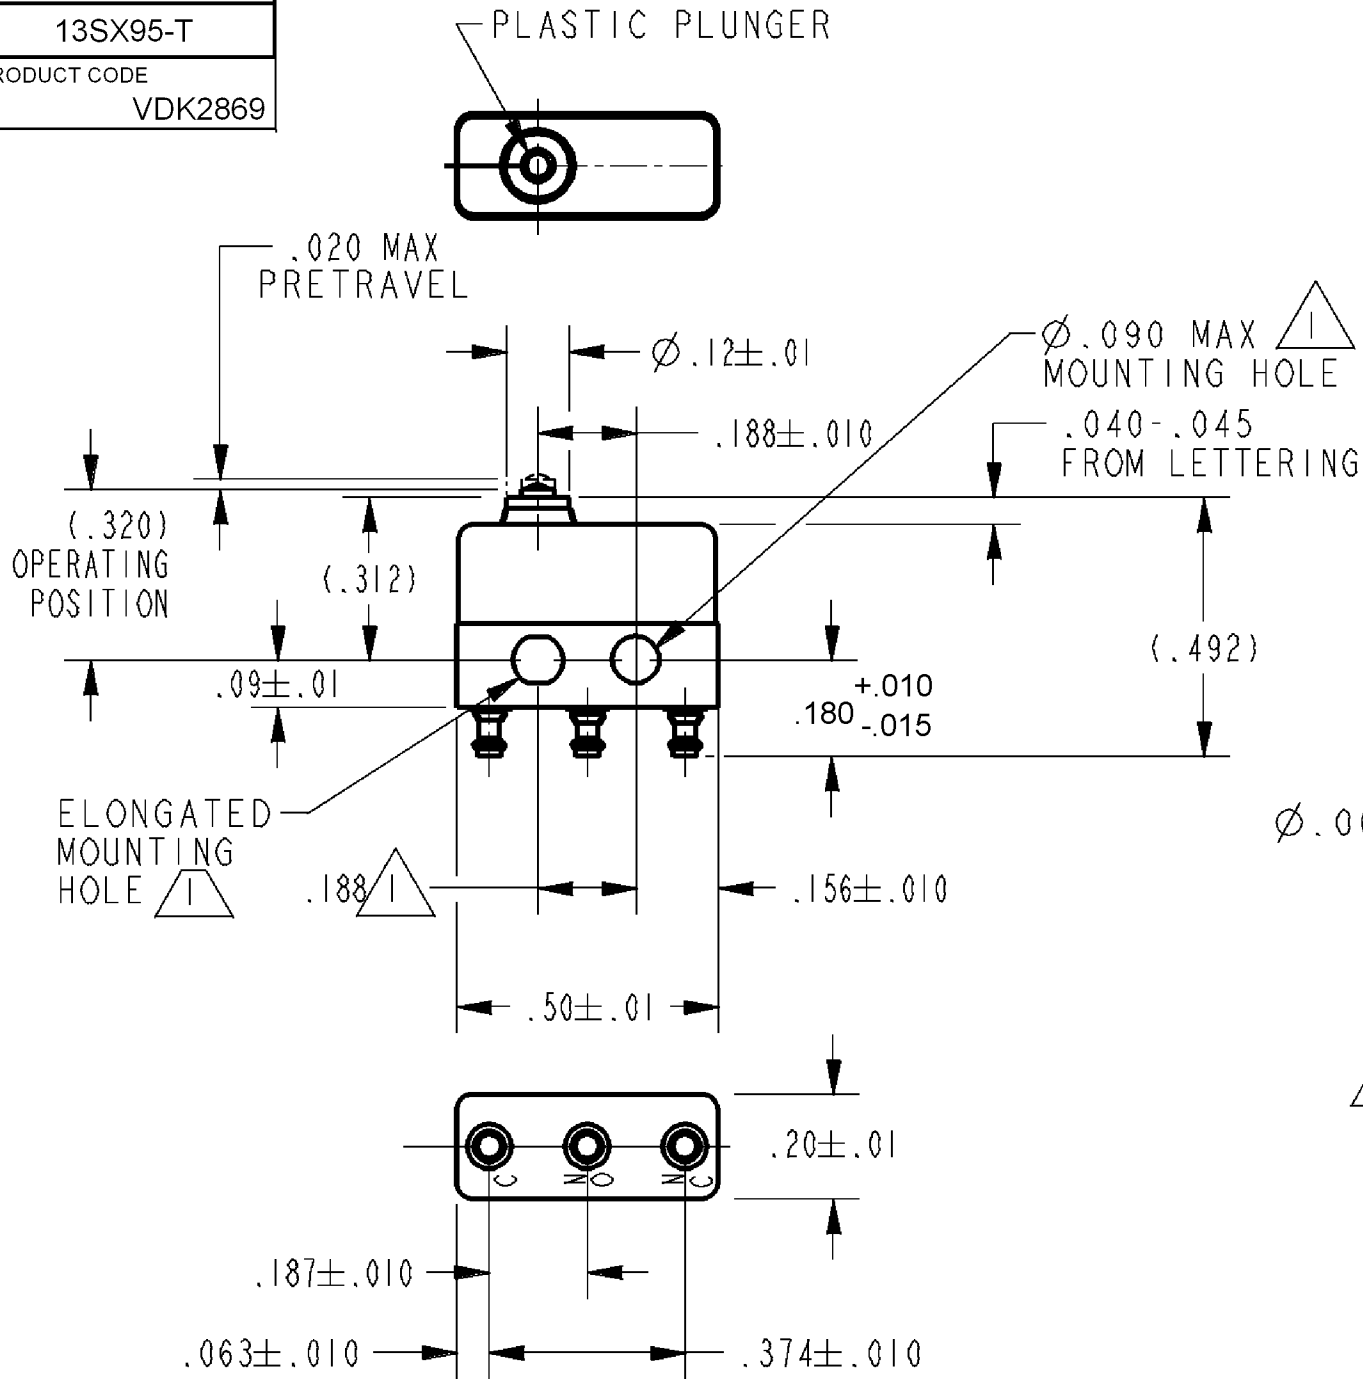

- NOTES
- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .188±.002 CENTERS
 - TERMINALS ARE SOLDER DIPPED WITH ROHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - PLUNGER WILL BE FLUSH TO UNDERFLUSH AT FULL OVERTRAVEL

RELEASE NO.	PR - 22587
REPLACES	X100696-SX

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±			DRAWN	VK	06 MAR 08	Honeywell			
OPERATING FORCE – – – - 6 OZ MAX	CONTACT ARRANGEMENT SPDT						CHECK	RJ	06 MAR 08				
RELEASE FORCE – – – - 1/2 OZ MIN	30 VOLTS DC RATING			.030 .015 .005 THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC						
DIFFERENTIAL TRAVEL – – – .003 MAX		SEA LEVEL	50,000 FT										
OVERTRAVEL – – – – – .010 MIN	INDUCTIVE	1/2 AMP	1/2 AMP										
	RESISTIVE	1 AMP	1 AMP										
	MAXIMUM INRUSH 2 AMP			THIRD ANGLE PROJECTION 			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV
	APPROVALS	UL, CSA 1A 125 VAC 					BRAND L22	B	I	13SX95-T	5		
								RASTER				SCALE -	WEIGHT .003 LB MAX