



PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.8

RECOMMENDED
PANEL CUT-OUT

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1A-2A

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
- ELECTRICAL LIFE: 6,000 [cURus]
10,000 [VDE]
- CONTACT RESISTANCE: 20 mΩ MAX. INITIAL
- INSULATION RESISTANCE: 100 MΩ AT 500VDC
- OPERATING TEMPERATURE: -20°C TO +65°C [cURus]
-20°C TO +125°C [VDE]
- CONTACT RATING: 16A, 125VAC-250VAC, [cURus]
16(4)A, 250VAC, [VDE]
- DIELECTRIC STRENGTH: 1000V FOR 1 MINUTE
- ILLUMINATION VOLTAGE: 125V
- TERMINALS TO BE SILVER PLATED
- ▲ DENOTES CRITICAL PARAMETER
- 2002/95/EC (RoHS) COMPLIANT.


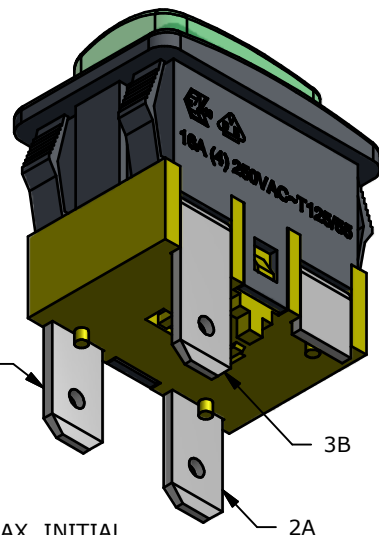


▲ OFF-ON
CIRCUIT: SPST


▲ BODY COLOR:
BLACK

▲ LENS COLOR:
GREEN

▲ LENS STYLE:
FULL ILLUMINATION

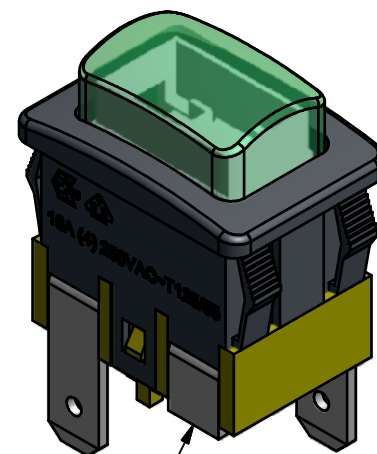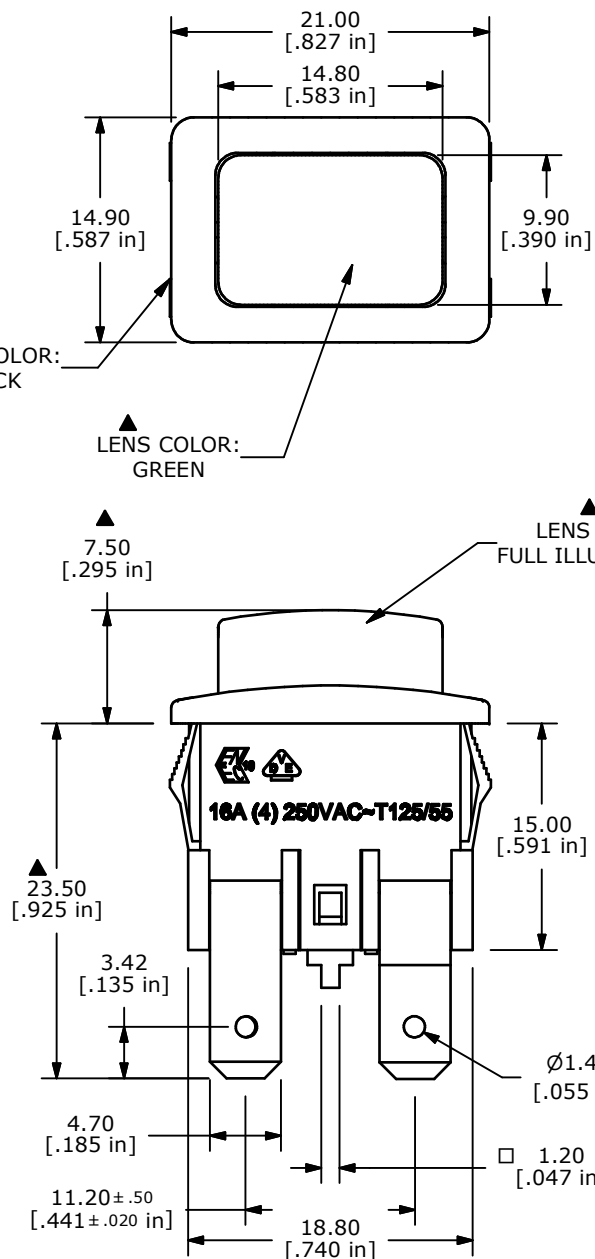

B

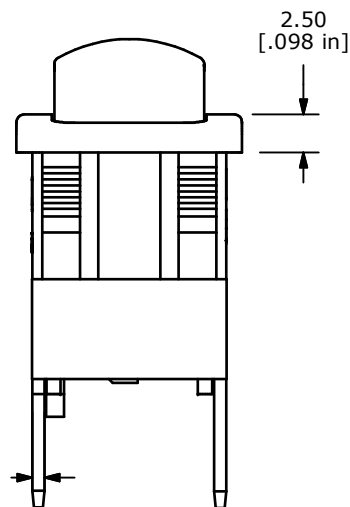

B	20974	REMOVE EXTRA TERMINAL	1/18/13	EBP
A	20931	INITIAL RELEASE	12/17/12	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PA411C1000-136				
SCALE	DATE 12/18/2012	DR EBP	DWG 14-PA411C1000136	REV B