


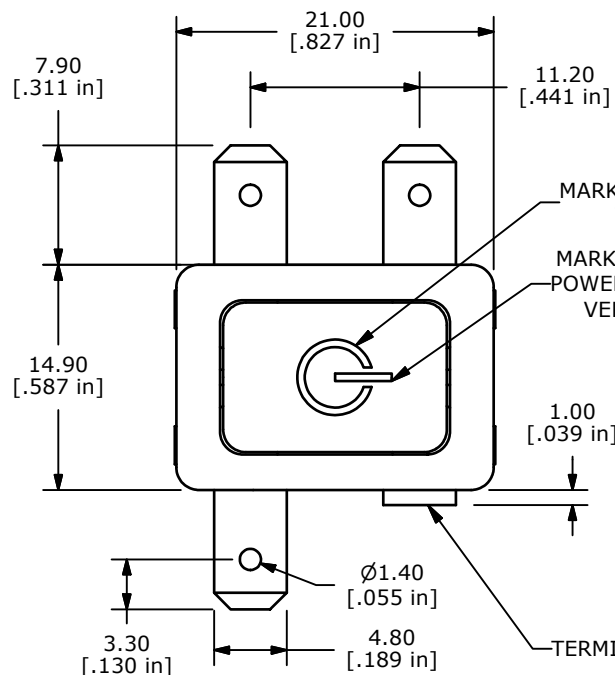
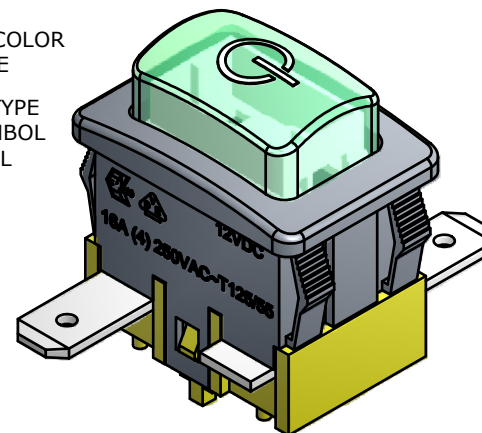
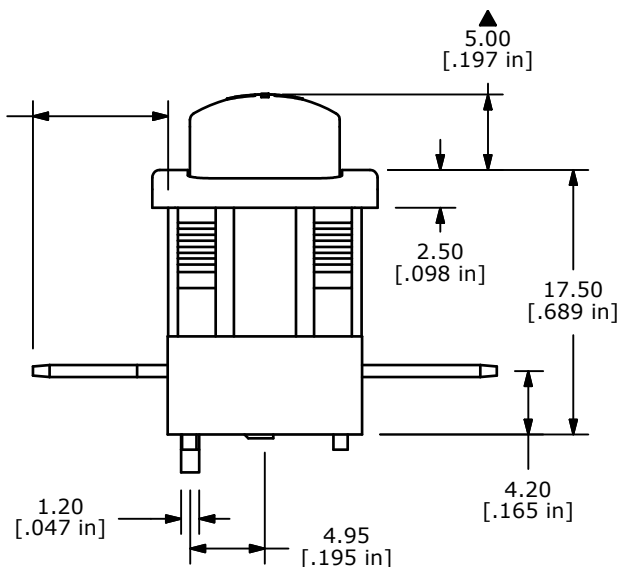
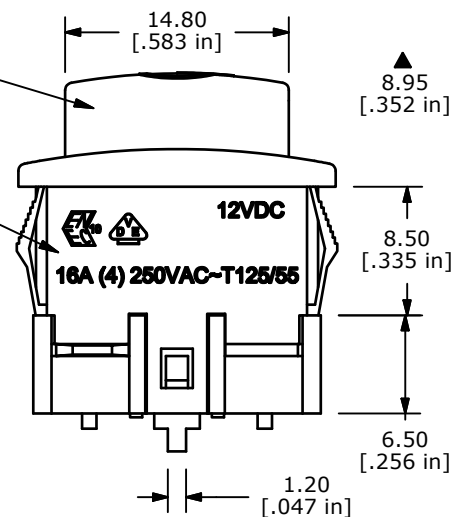
PANEL CUTOUT

PANEL THICKNESS	Y DIMENSION
.075 ~ 1.25mm	19.2 +.0/-0.1mm
1.25 ~ 2mm	19.4 +.0/-0.1mm
2 ~ 3mm	19.8 +.0/-0.1mm



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- ▲ 3. TERMINAL: HORIZONTAL TAB, 4.8mm
- ▲ 4. FUNCTION: 1 POLE, OFF - ON
5. RATING: 16A 125/250VAC [UL,CSA]
16A (4) 250V ~ T125/55 [VDE, ENCEC]
6. ELECTRICAL LIFE: 10,000 CYCLES
7. CONTACT RESISTANCE: 20m OHM INITIAL MAX
8. INSULATION RESISTANCE 100M OHM MIN @ 500VDC
9. DIELECTRIC STRENGTH 1,000 VAC FOR 1 MINUTE
10. ▲ DENOTE CRITICAL PARAMETER
- ▲ 11. ILLUMINATION: TUNGSTEN BULB 12VDC
12. 2002/95/EC (ROHS) COMPLIANT

MARKING COLOR
WHITEMARKING TYPE
POWER SYMBOL
VERTICALBUTTON COLOR
GREEN
FULL ILLUMINATIONBODY COLOR
BLACK

E-SWITCH®

TITLE PA451C1021-134

A	19959	RELEASE FOR PRODUCTION	5/20/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1	DATE 5/20/2011	DR BGL	DWG 14-PA451C1021134	REV A
--------------	-------------------	-----------	-------------------------	----------