

FO-55111-A

HONEYWELL
PART NUMBER
141SM102

PRODUCT CODE
TYS2400

REV	DOCUMENT	CHANGED BY		CHECK
2	0038113	PRS	12JUN08	BLR

B

A


A

4

3

2

1

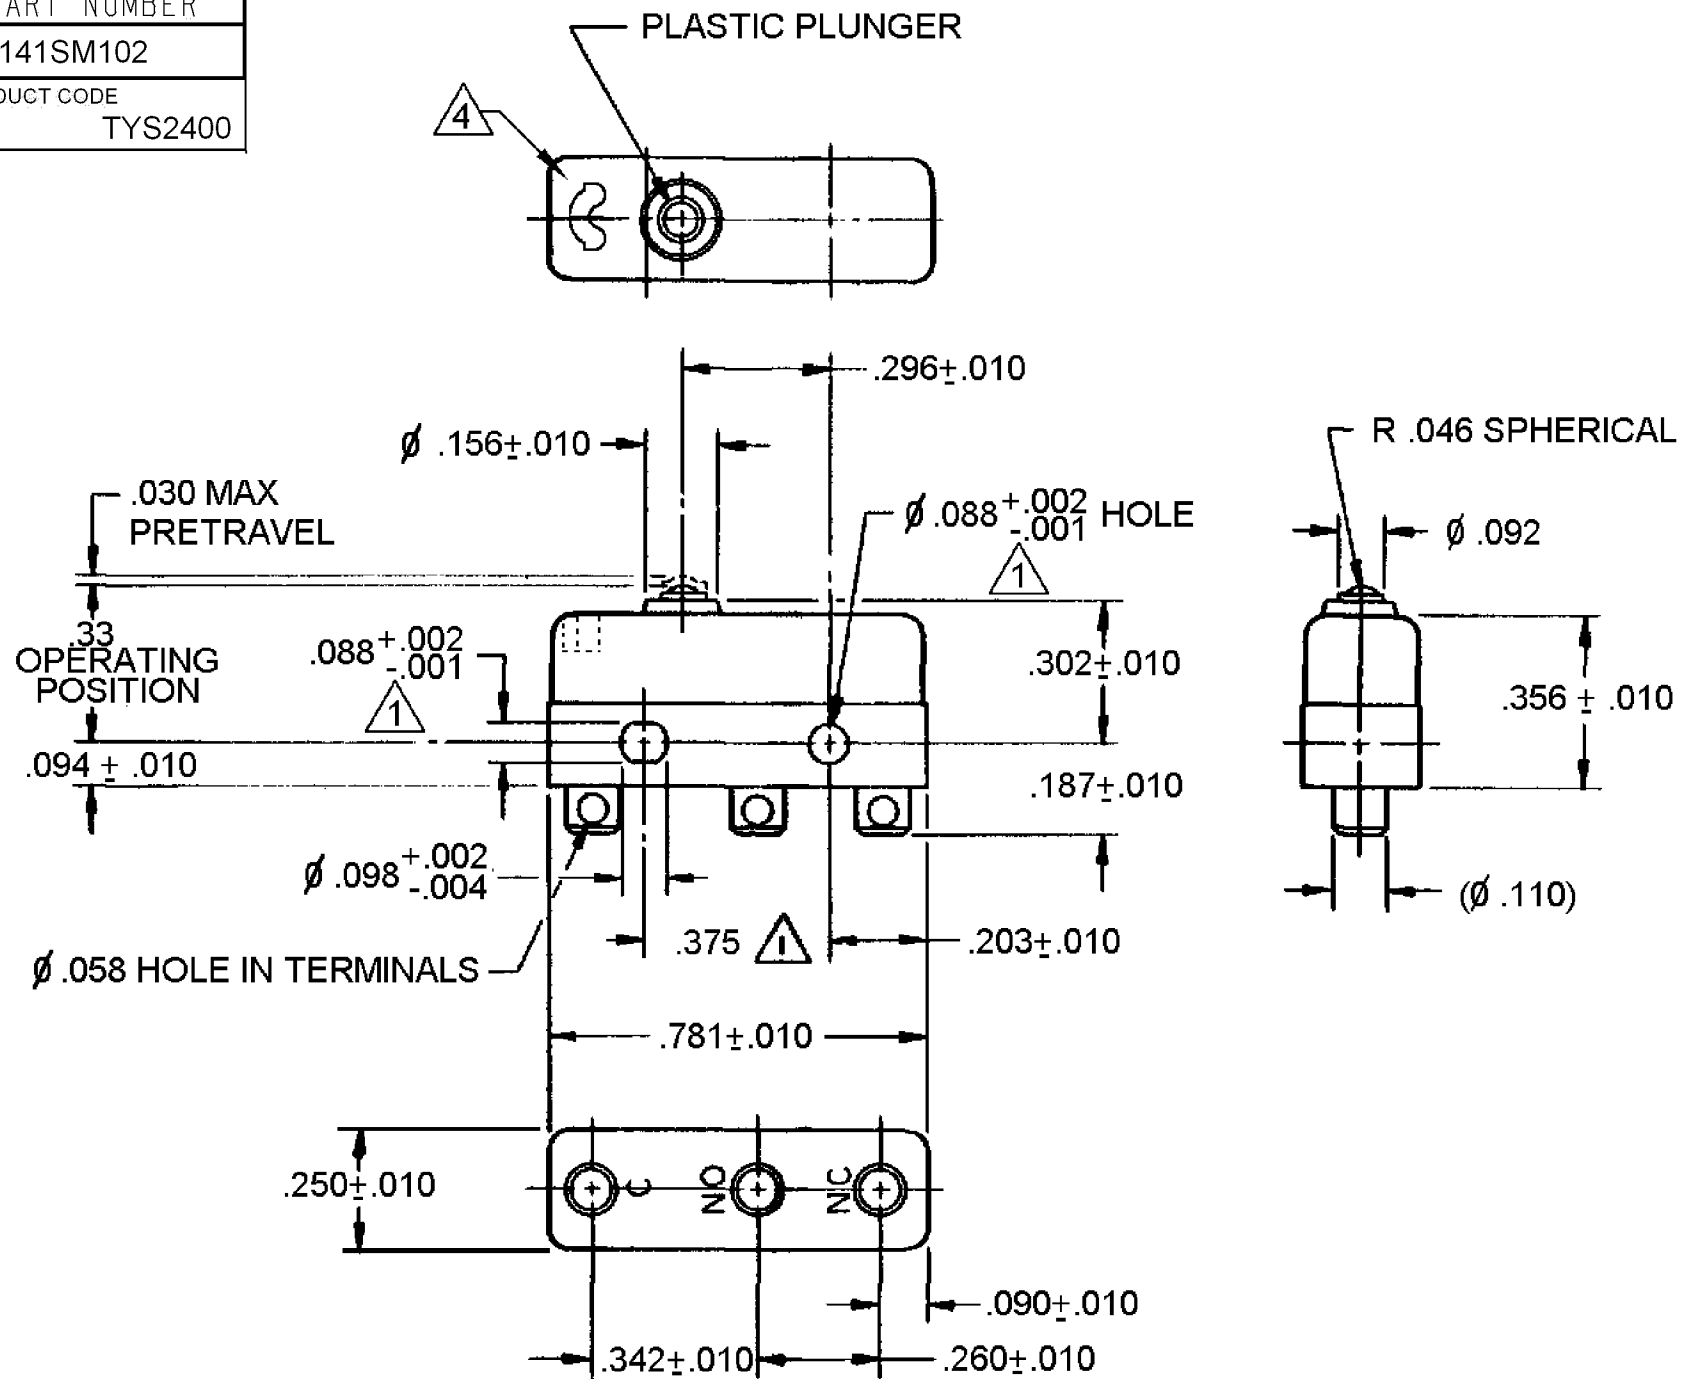

NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF ∅ .087 MAX ON .375 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- ④ COVER WILL ACCEPT LEAF

RELEASE NO. 201267

REPLACES X113215 - SM

CHARACTERISTICS

OPERATING FORCE - - - - 3-5 OZ

RELEASE FORCE - - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - - .004 MAX

OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

APPROVALS

KEMA, CE	11A 250V ~ T85 1E4	
	5A 30 Vdc T85 1E4	
UL, CSA	11A 1/4 HP 125 250 VAC	BRAND L212
	5A 30 VDC 1/2 A 125 VDC	

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION



DRAWN	VK	30OCT 07
CHECK	RJ	30OCT 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME		REV
B	I	141SM102		2
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	

4

3

2

1