


REV	DOCUMENT	CHANGED BY	CHECK
3	0038113	PRS 12JUN08	BLR

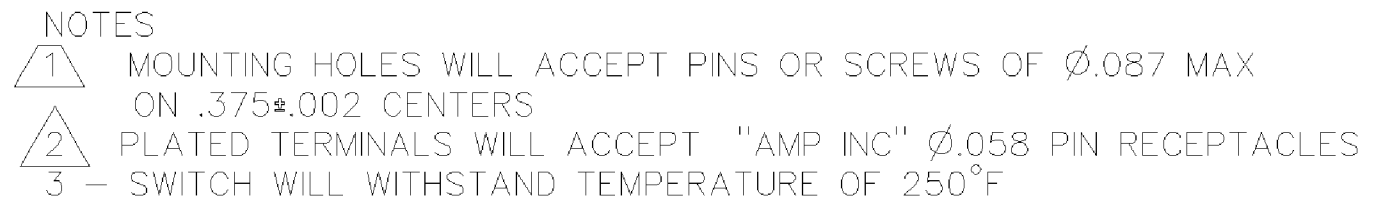

RELEASE NO.	PR - 19882
REPLACES	X94370 - SM

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± - THIRD ANGLE PROJECTION 		DRAWN	VK	30 OCT 07					
OPERATING FORCE — — — — 9 OZ MAX		CONTACT ARRANGEMENT S P D T				CHECK	RJ	30 OCT 07					
RELEASE FORCE— — — — 2 OZ MIN		APPROVALS KEMA, CE 11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4  		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL— — — .020 MAX													
OVERTRAVEL — — — — — .013 MIN		UL, CSA 11A 1/4 HP 125 <u>250</u> VAC 5A 30 VDC   BRAND L190		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE	TYPE	DRAWING NAME		REV			
						B	I	141SM28-H58		3			
				RASTER		SCALE	-	WEIGHT .006 LB MAX	SHEET	1 OF 1			