
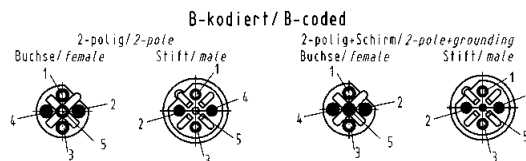
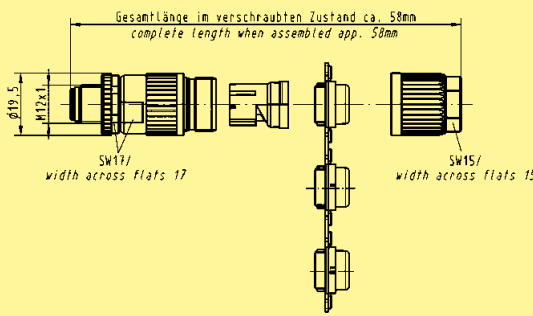
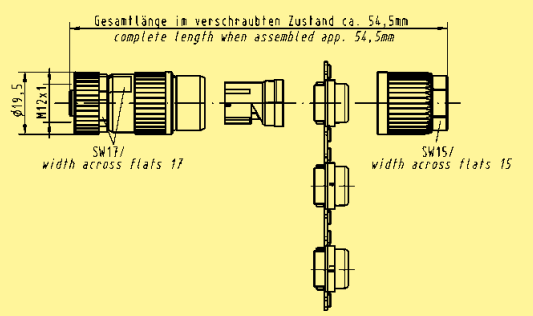
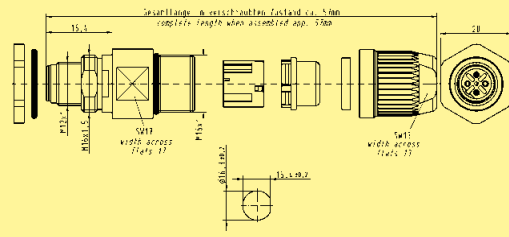


Circular connector M12 shielded, B-coded acc. to IEC 61076-2-101

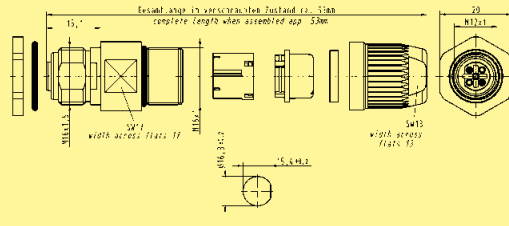

Identification	Male	Female	Drawing	Dimensions in mm
HARAX® M12-L, screened version 2 poles, B-coded 0.25 - 0.34 mm ² / AWG 24 - 22  2 poles, B-coded 0.25 - 0.34 mm ² / AWG 24 - 22 	21 03 241 1301			
		21 03 241 2301		
HARAX® panel feed-through 2-poles and shield, B-coded 0.25 - 0.34 mm ² / AWG 24 - 22 7 - 8.8 mm  2-poles and shield, B-coded 0.25 - 0.34 mm ² / AWG 24 - 22 7 - 8.8 mm 	21 03 341 1425			
		21 03 341 2425		

Stock items in bold type