


REV.	DATE	DESCRIPTION
A	06/14/00	CHANGE PLATING TO GOLD


3.60 [.142] 8.00 [.315] 5.20 [.205]



RECOMMENDED
CABLE STRIPPING DIM'S




1.60 [.063]




Ø11.00 [Ø.433]
Ø8.20 [Ø.323]


5/16-32UNEF-2A

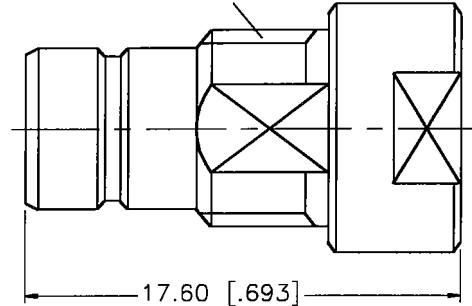

17.60 [.693]




10.80 [.426]

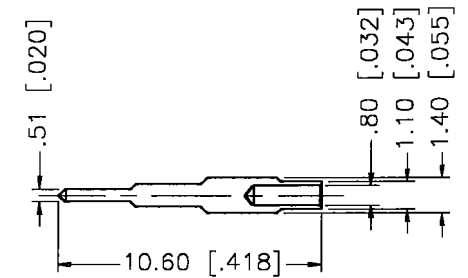

.51 [.020]


10.60 [.418]

.80 [.032]
1.10 [.043]
1.40 [.055]




8.20 [.323]
7.40 [.292]

RECOMMENDED
MOUNTING HOLE

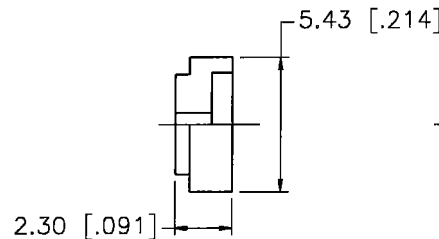

2.30 [.091]

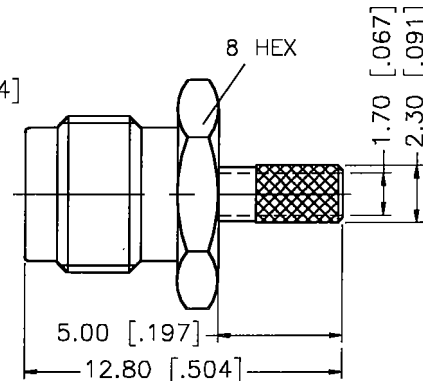


8 HEX

5.00 [.197]

12.80 [.504]

1.70 [.067]
2.30 [.091]



3.00 [.118]
3.80 [.150]

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	 Connector Corporation						
1	BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	06/14/00	TITLE SMB BULKHEAD CRIMP JACK (FOR RG-179/U CABLE- 75ohm)					
2	INSULATOR	TEFLON	NATURAL		CHECKED								
3	CONTACT PIN	BRASS	GOLD		ISSUED								
4	FERRULE	COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4				SIZE		FSCM NO.	DWG. NO.	REV.	
5	LOCK WASHER	BRASS	GOLD					A	99001		142111.DWG		A
6	HEX NUT	BRASS	GOLD										
7													
8					DO NOT SCALE DRAWING				SCALE	NA	PART NO.	142111	SHEET