


Circular connector M12 shielded, D-coded acc. to IEC 61076-2-101




D-kodiert / D-coded

4-polig / 4-pole
Buchse / female



4-polig / 4-pole
Stift / male



Circular
Connectors

Identification

Male

Part No.

Female

Drawing

Dimensions in mm

HARAX® M12-L,
screened version

4-poles, D-coded,
0.14 - 0.34 mm², AWG 26-22
0.34 - 0.5 mm², AWG 22-20





4-poles, D-coded,
0.14 - 0.34 mm², AWG 26-22
0.34 - 0.5 mm², AWG 22-20



21 03 281 1405
21 03 282 1405

21 03 281 2405
21 03 282 2405

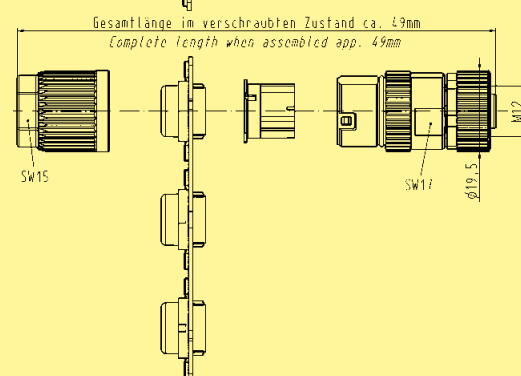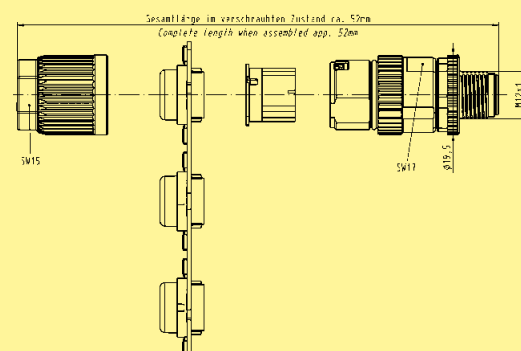

HARAX® panel feed-through

D-coded
0.14 - 0.34 mm², AWG 26 - 22




D-coded
0.14 - 0.34 mm², AWG 26 - 22



21 03 381 1425

21 03 381 2425

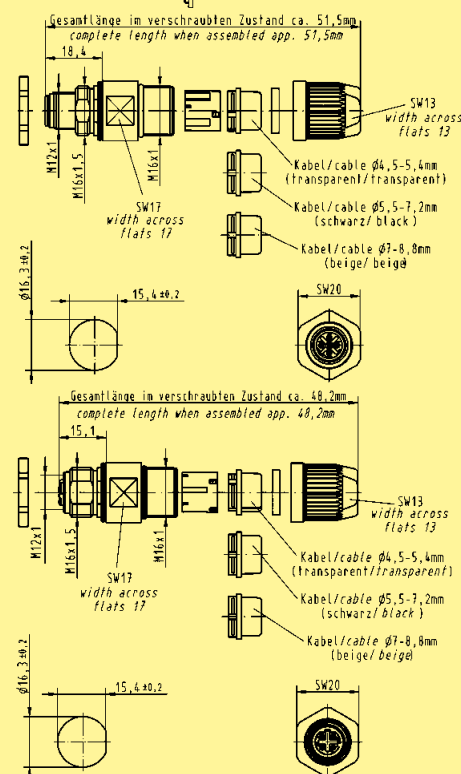

Stock items in bold type