



Product Number (Please contact us)  
**RA-8565SA : Q41A86552xxxx00**

## For Automotive

## I<sup>2</sup>C-Bus INTERFACE REAL TIME CLOCK MODULE

# RA - 8565 SA


- Built in frequency adjusted 32.768 kHz crystal unit.
- Interface Type : I<sup>2</sup>C-Bus Interface (400 kHz)
- Wide operating voltage range : 1.8 V to 5.5 V
- Wide Timekeeper voltage range : 1.7 V to 5.5 V  
T<sub>a</sub> = -40 °C to +125 °C
- Extended operating temperature range: -40 °C to +125 °C
- 32.768 kHz frequency output function: N-ch Open drain output  
With Control Pin
- The various functions include full calendar, alarm, timer, etc.
- Conforms to AEC-Q200
- \* The I<sup>2</sup>C-Bus is a trademark of NXP Semiconductors



Actual size



## Block diagram

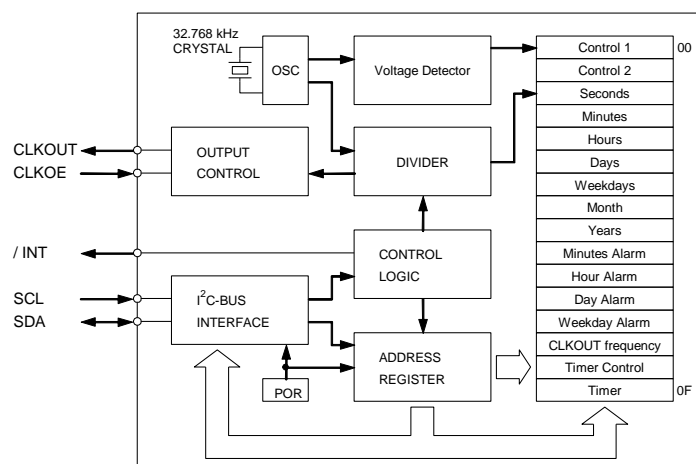

## Overview


- Wide operating temperature range for automotive
  - $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Clocking-status detection function
  - It can judge the validity of data after backup operation return by a status of VL-bit.
- 32.768 kHz frequency output function
  - CLKOUT pin output (N-ch Open Drain output )
  - Output frequency can be selected as 32.768 kHz, 1024 Hz, 32 Hz, or 1 Hz.
- The various interrupt function
  - Timer function can be set up between 1/4096 second and 255 minutes.
  - Alarm function can be set to day of week, day, hour, or minute.

### Pin Function

Terminal	Directions	Functions
SCL	Input	Serial clock input.
SDA	Bi-directional	Data input and output.
CLKOUT	Output	The CLKOUT pin is a clock output ( open drain output ) pin with control output. ( Output frequency can be selected as 32.768 kHz, 1024 Hz, 32 Hz, or 1 Hz. )
CLKOE	Input	The CLKOE pin is an input pin used to control the output mode of the CLKOUT output pin. During the initial power-on ( when power is applied from 0 V ) , if the CLKOE input pin is at high level ( = H ) , the power-on reset function selects 32.768 kHz as the frequency.
/INT	Output	Interrupts output by Alarm and Timer events. ( Open drain output )
VDD	—	Connected to a positive power supply.
GND	—	Connected to a ground.

### Terminal connection / External dimensions

(Unit:mm)

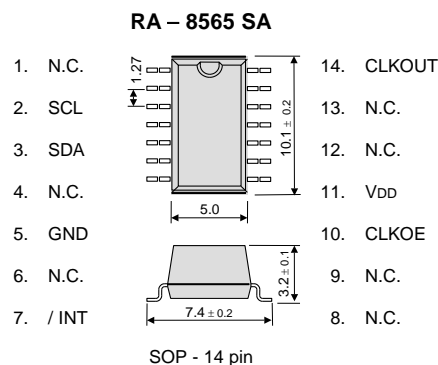

Metal may be exposed on the top or bottom of this product.  
This will not affect any quality, reliability or electrical spec.

### Specifications (characteristics)

\* Refer to application manual for details.

### ■ Recommended Operating Conditions

Item	Symbol	Conditions	Min.	Typ.	Max.	unit
Operating voltage	V <sub>DD</sub>	–	1.8	3.0	5.5	V
Timekeeper voltage	V <sub>CLK</sub>	–	1.7	3.0	5.5	V
Operating temperature	T <sub>OPR</sub>	–	–40	+25	+125	°C

### ■ Frequency characteristics

Item	Symbol	Conditions	Rating	unit
Frequency stability	$\Delta f / f$	Ta = +25 °C VDD = 3.0 V	5 ± 23 % <sup>*1</sup>	× 10 <sup>-6</sup>
Oscilation start up time	tSTA	Ta = +25 °C VDD = 1.8 V	1.5 Max.	s
		Ta = -40 °C to +125 °C VDD = 3.0 V	3 Max.	s

\*1) Equivalent to 1 minutes of monthly deviation.

■ Current consumption under backup mode.

Item	Symbol	Conditions		Min.	Typ.	Max.	unit
Standby current.	IBK	f <sub>SCL</sub> = 0 Hz CLKOE = LOW  V <sub>DD</sub> = 5 V	+125 °C		1.10	1.8	μA
			-40 °C to +85 °C		0.60	1.2	
		f <sub>SCL</sub> = 0 Hz CLKOE = LOW  V <sub>DD</sub> = 3 V	+125 °C		1.00	1.6	μA
			-40 °C to +85 °C		0.55	1.0	