
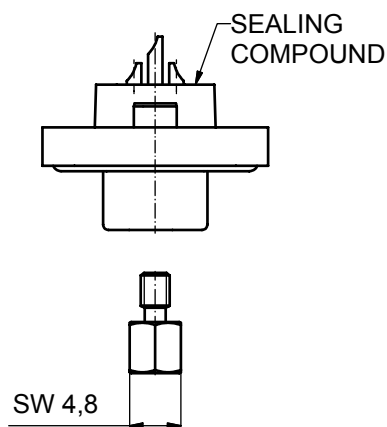
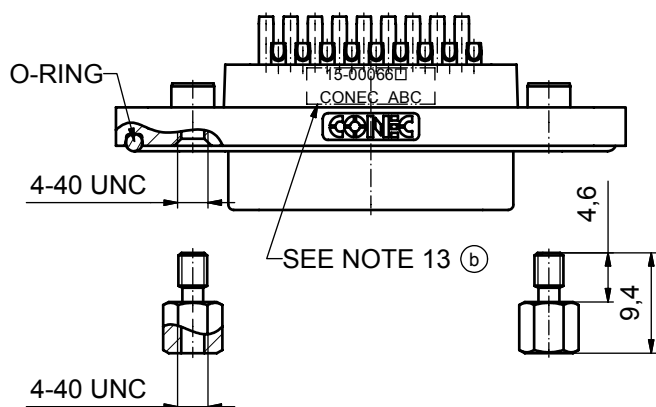
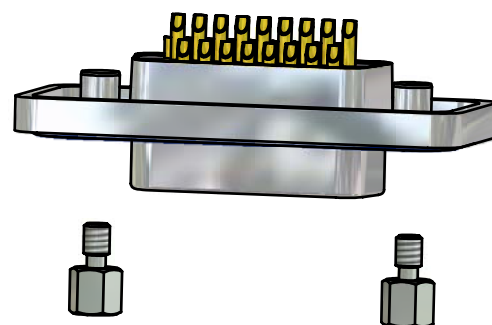


NOTES:

-

RUBBER GASKET
PLACED ON TOP SURFACE
OF MALE INSULATOR

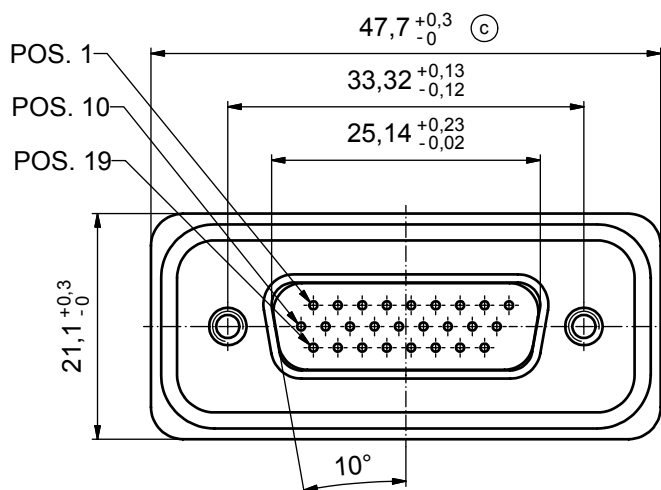

©

AT ALL TIMES WATER RESISTANT CONNECTORS NOT IN USE SHOULD BE COVERED WITH A CONEC WATER RESISTANT CAP OR WATER TIGHT HOOD.

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
PRODUCED IN ANY WAY, AND MAY NOT
PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.

DO NOT ALTER CAD DRAWING BY HAND

3 x c	Ä 3435	01.10.09	HS
3 x b	Ä 3129	26.09.08	Petker
a	Origin		
re: description	date		name

tolerance



scale:

material:

title:	
--------	--

2:1 (5:1)

see notes

D-SUB MALE HD
26pos. SOLDER CUP
with hexlocking screw

dwg no:	
---------	--

Inventor 10

DIN-

15K1A272

A3
class 1

part no:

15-00066□ (see note 9) (b)




(b)

Solder Instruction

1. Cable should be prepared for soldering. The cable/wires must be pretinned.
2. Insert cable/wire into solder cup.
3. Operate the soldering iron at 350°C, 50 Watt max. and use a pencil tip.
4. Put tip to wire in solder cup.
5. After 1 second bring in solder.
6. Heat for 3 seconds longer. Do not heat contact more than 4 seconds in total.
7. Remove soldering iron.
8. Wait until solder gets rigid again.
9. Do not solder adjacent contacts consecutively,
alternate position within the connector to minimize heat build up.

RECOMMENDED PANEL CUT-OUT

(b)

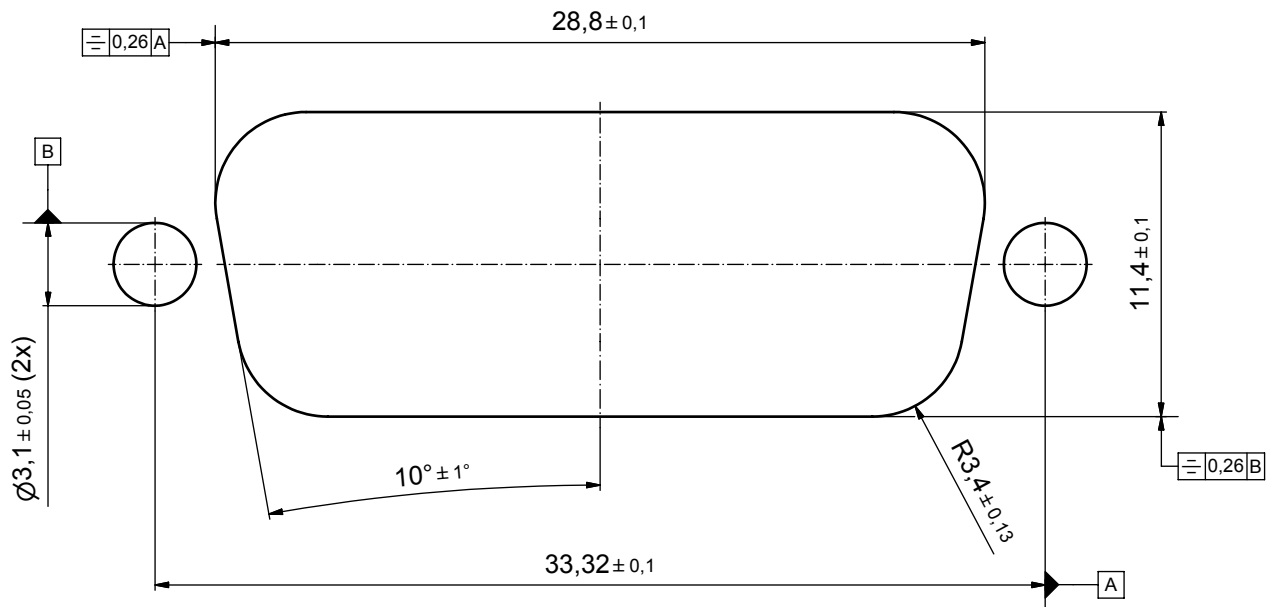

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

2 x b	Ä 3129	26.09.08	Petker
a	Origin		
rev.	description	date	name

CONEC®

scale: 5:1	
material: see sheet 1	
title: PANEL CUT-OUT D-SUB MALE HD 26pos. SOLDER CUP with hexlocking screw	
dwg no: Inventor 10	DIN-A3
15K1A272	
sh: 2	
part no: see sheet 1	