

15PB22

REPLACES

PR-9048

RELEASE NO.

11

ISSUE

11

DRAWING NUMBER

FORMTEK

FO-82851-B

22 AUG 80

12

16

18

20

22

24

26

28

30

32

34

36

38

40

42

44

46

48

50

52

54

56

58

60

62

64

66

68

70

72

74

76

78

80

82

84

86

88

90

92

94

96


98

100




MICRO SWITCH
 FREEPORT, ILLINOIS, U.S.A.
 A DIVISION OF HONEYWELL
 FED. MFG. CODE 91829

SWITCH - PUSHBUTTON

CATALOG LISTING
15PB22

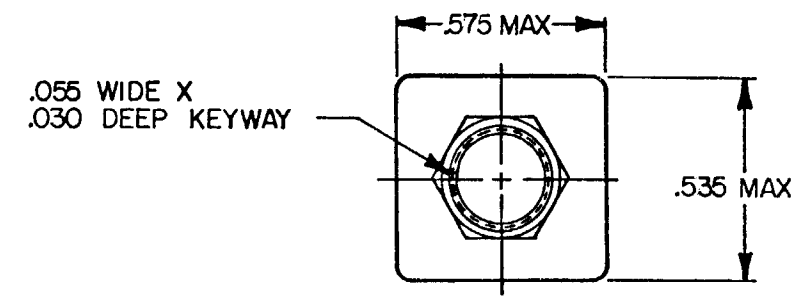

WHITE PLASTIC PUSHBUTTON
 BONDED ON PLASTIC PLUNGER

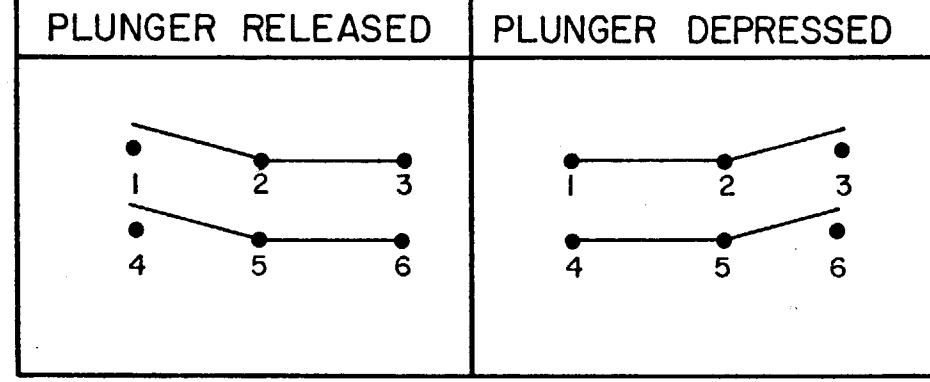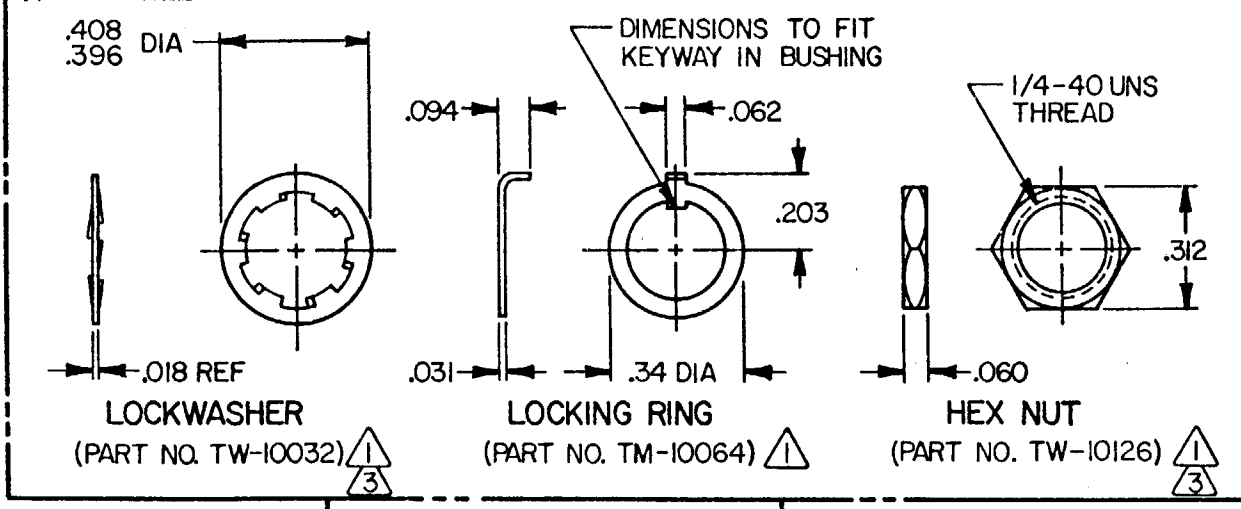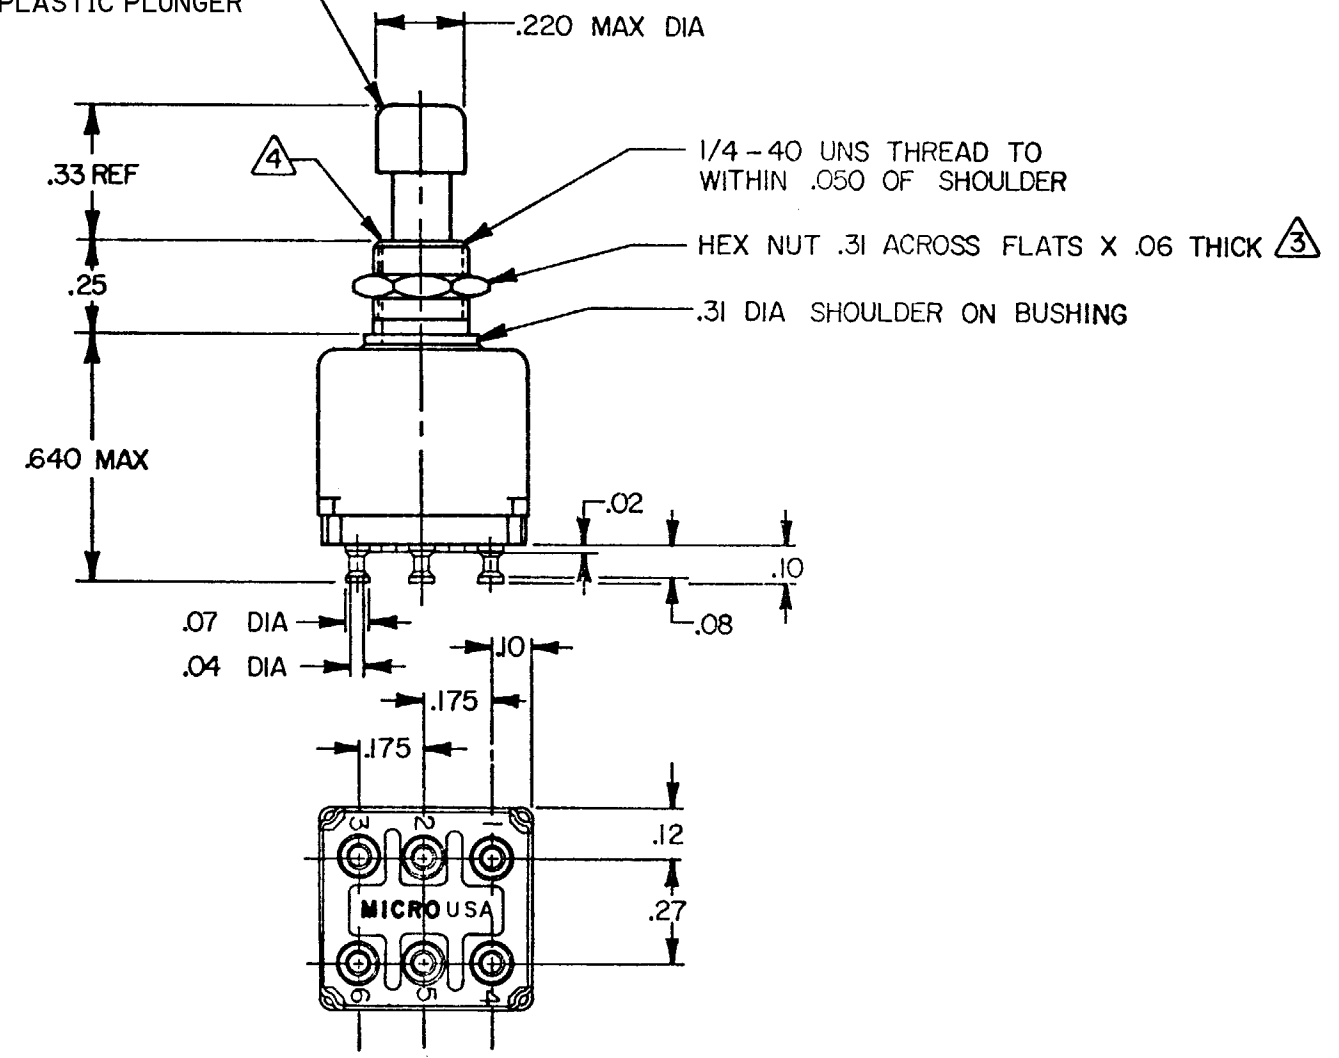

- NOTES**
- FURNISHED UNASSEMBLED
 - TERMINALS ARE PLATED FOR SOLDERING
 - MATTE NICKEL FINISH
 - BRIGHT NICKEL PLATE FINISH
 - RECOMMENDED FOR MANUAL OPERATION ONLY
 - DATE CODE, CAT. LISTING & TERMINAL IDENT IS MARKED ON SIDE OF SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		SCALE 2:1
		DO NOT SCALE PRINT
CHARACTERISTICS	ELECTRICAL DATA	TOLERANCES
OPERATING FORCE --- 12 OZ. APPROX	CONTACT ARRANGEMENT	APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2
TOTAL TRAVEL --- .150 APPROX	DPDT MOMENTARY	
	115 VAC OR 30 VDC	
	RESISTIVE --- 5 AMP	
	INDUCTIVE --- 2 AMP	
	LAMP --- 1 AMP	
	AT 65,000 FT ALTITUDE	
	CODE L117 5A-125 VAC	