
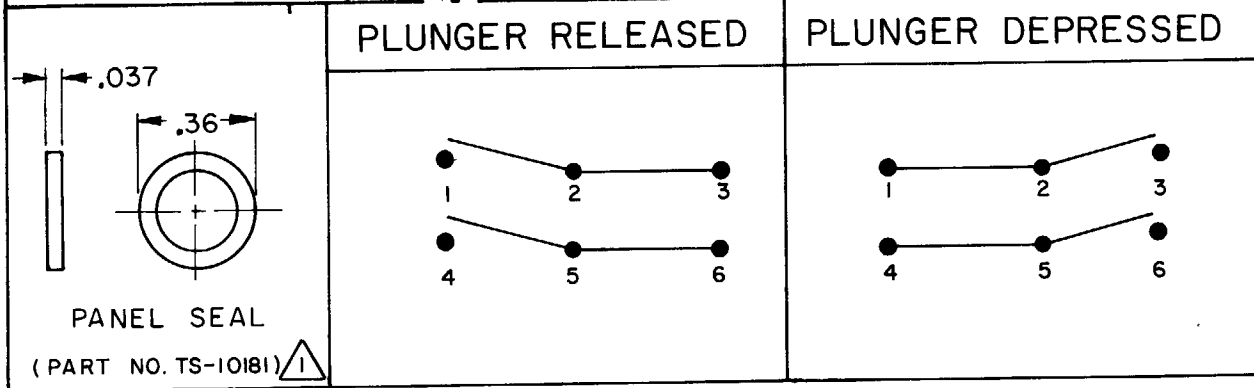
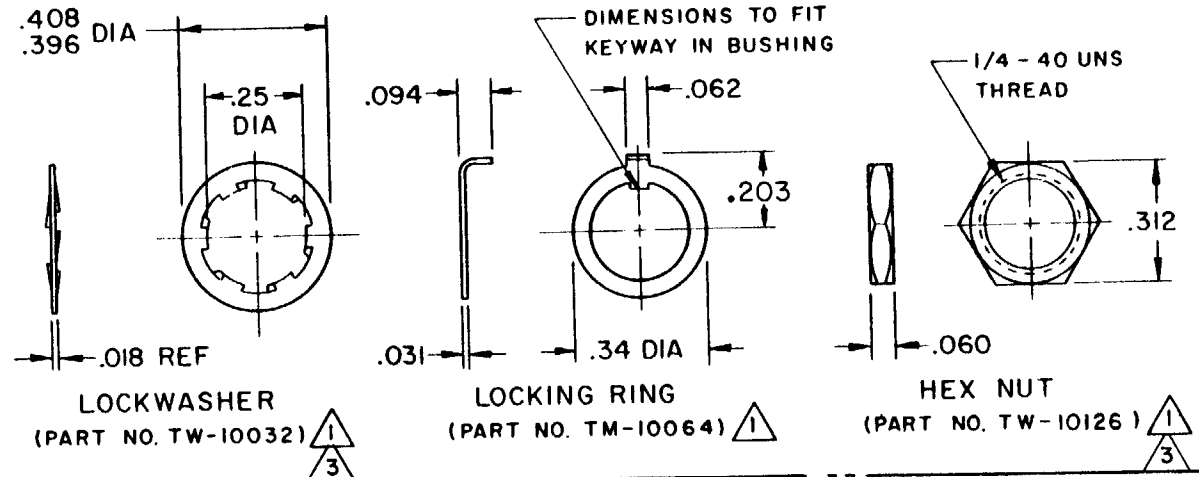
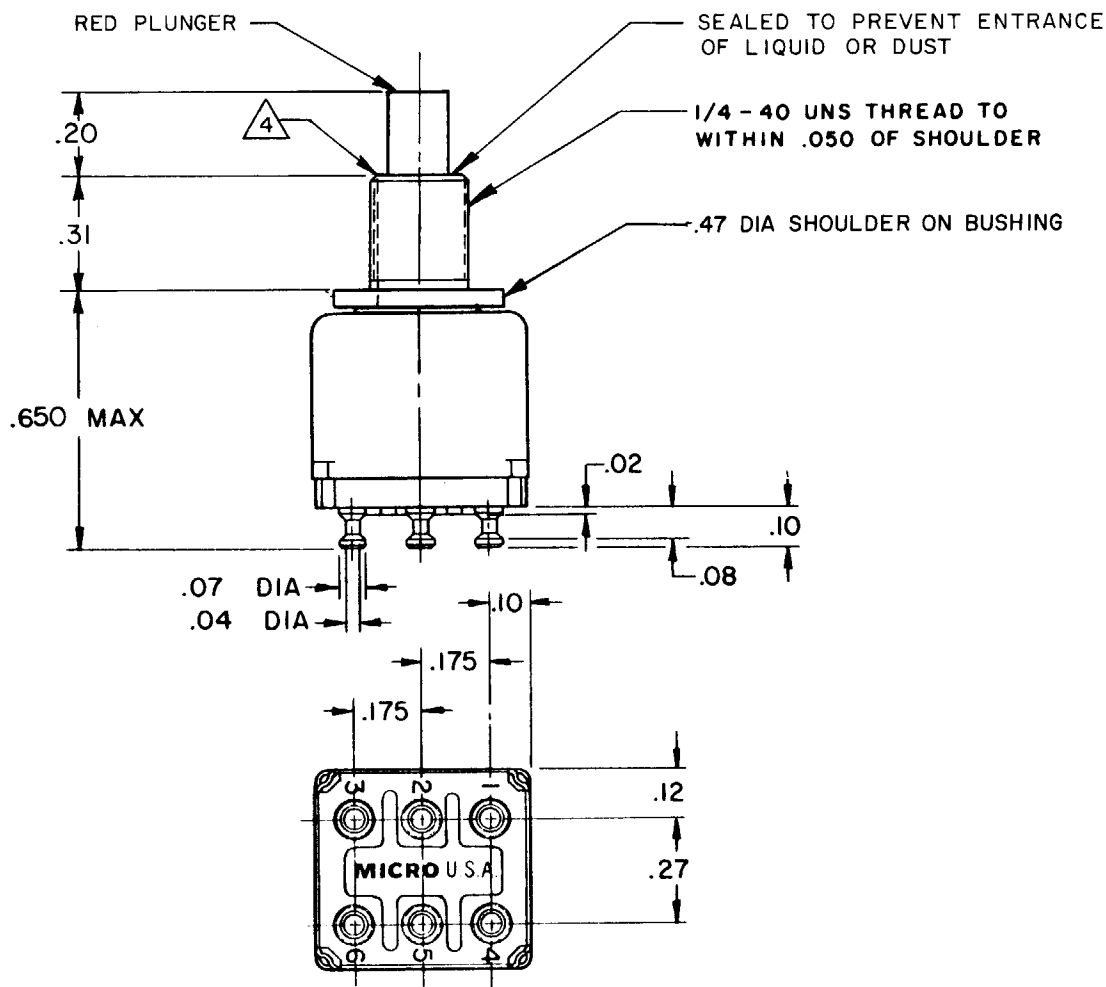


FO-52851-A
DRAWN
J A L 12 JAN 76
CHECK
DAW
13 JAN 76
G
SAV
MAR 91
C069439
10 JUL 90
F
C067868
24 FEB 88
TSK
E
C062939
12 MAR 87
J A P
CHECK
WRO
15 JAN 76
D
C061252
18 NOV 86
TSK
C
C060532
27 MAR 86
J A P
B
C059236
30 JUN 78
K P
REVISIONS
ISSUE
X
X
X
X
DRAWING
NUMBER
8
M
15PB33
REPLACES
PR-5485
RELEASE NO.
14 JAN 76
HCS
CHECK
15 JAN 76

MICRO SWITCH
FREEPORT, ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - PUSHBUTTON

CATALOG LISTING
15PB33

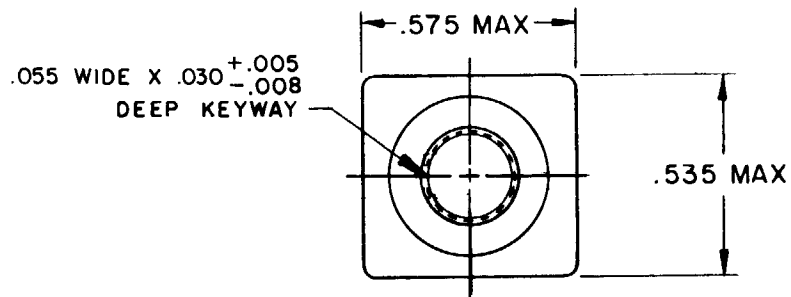

- NOTE
- 1 FURNISHED UNASSEMBLED
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 MATTE NICKEL FINISH
 - 4 BRIGHT NICKEL PLATE FINISH
 - 5 - RECOMMENDED FOR MANUAL OPERATION ONLY
 - 6 - DATE CODE, CAT. LISTING & TERMINAL IDENT IS MARKED ON SIDE OF SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		THIRD ANGLE PROJECTION	SCALE 2 TO 1
CHARACTERISTICS		ELECTRICAL DATA	DO NOT SCALE PRINT
OPERATING FORCE --- 40 OZ APPROX		CONTACT ARRANGEMENT	TOLERANCES
TOTAL TRAVEL --- .150 APPROX		DPDT MOMENTARY	APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±
		115 VAC OR 30 VDC	DIM. TOL. DIM. TOL.
		RESISTIVE --- 5 AMP	mm. mm/in. in. mm/in.
		INDUCTIVE --- 2 AMP	NO PLACES X 1/64
		LAMP --- 1 AMP	ONE PLACE X,X 0.4/0.16
		AT 65,000 FT. ALTITUDE	TWO PLACES X,X,X 0.15/0.006
			THREE PLACES X,X,X,X 0.38/0.015
			ANGLES X XXX 0.13/0.005
			SI METRIC US CUSTOMARY
			DESIGN UNITS
			RAW MATERIAL--COMMERCIAL STANDARD
			MICRO SWITCH STANDARDS APPLY
			DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED
			WEIGHT .016 LB MAX
		CODE L117 5A-125 VAC	