



1

D-SUB

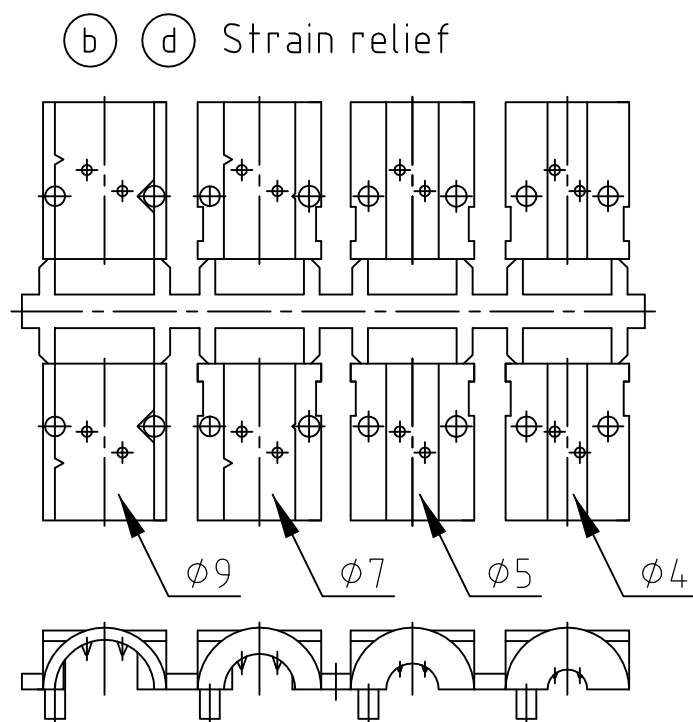

1. BACKSHELL HALVES: ZINC DIE-CAST; NICKEL PLATED
2. ASSEMBLY SCREWS: STEEL; TIN PLATED
3. JACK SCREW: STEEL; TIN PLATED
4. CABLE STRAIN RELIEF: PC
5. TEMPERATURE RANGE: -40°C to $+120^{\circ}\text{C}$
6. ATTENUATION FACTOR: $>40\text{dB}$ BETWEEN 30 MHz AND 2 GHz
7. ASSEMBLY INSTRUCTION SEE SHEET 2

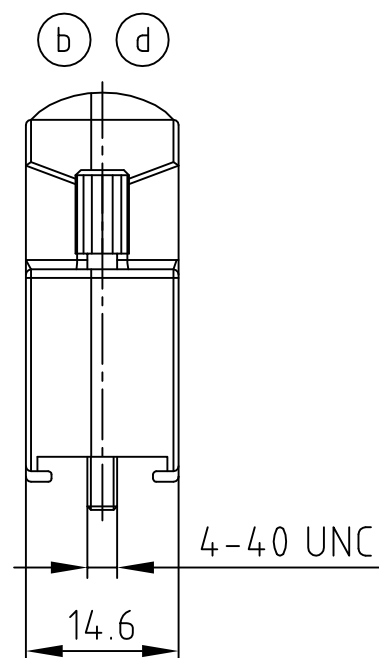

The logo for CONIE, featuring the word "CONIE" in a stylized, blocky font. The letters are filled with a pattern of vertical lines. A registered trademark symbol (®) is located to the upper right of the letter "E".

1

4

3


2

1


used for: D-SUB

ASSEMBLY INSTRUCTION:


Use two halves of strain relief
different sizes can be mixed

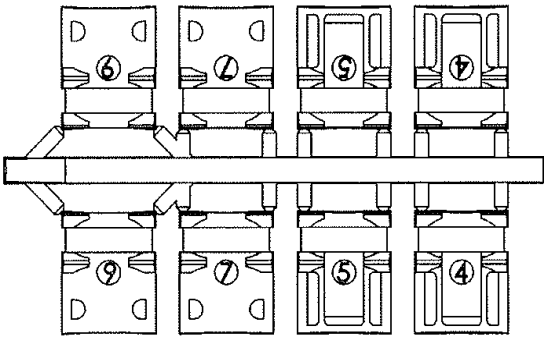


Strip cable 18mm and
shape cable to two pigtails

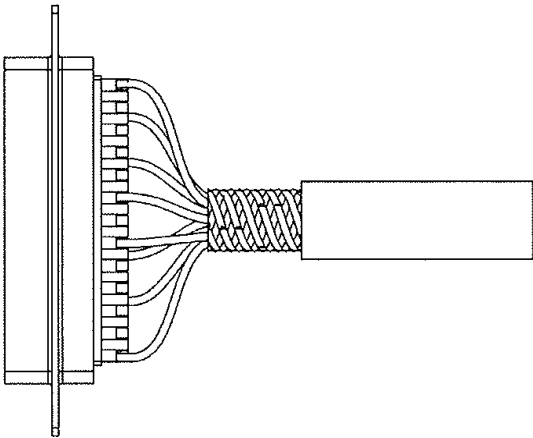


Attach the strain relief around the cable

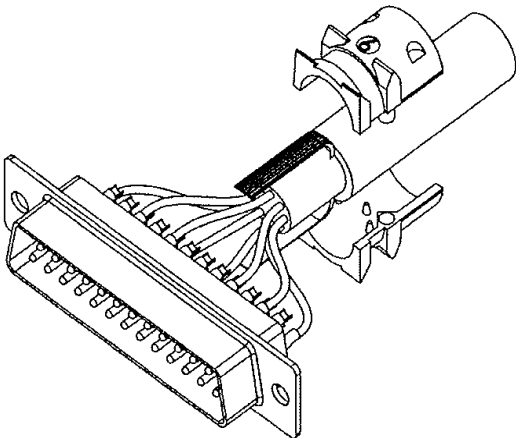


Bend cable shielding back
on outside of strain relief

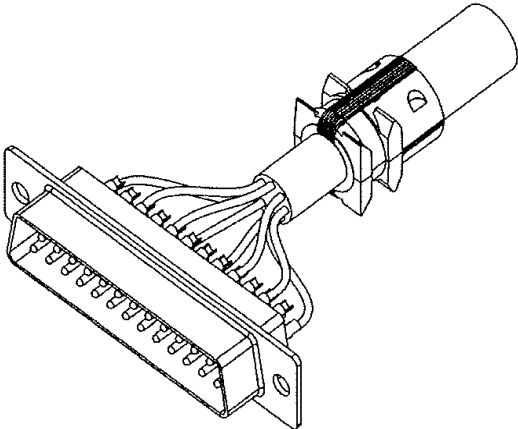

Mount connector and cable
into the backshell

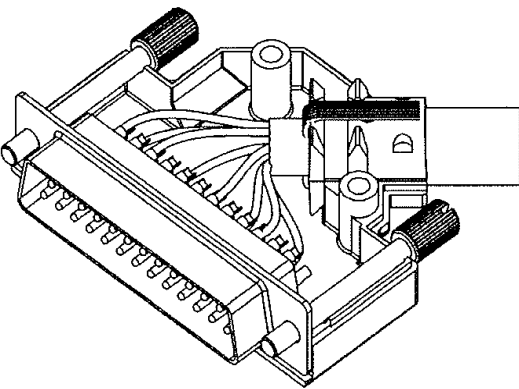


Assemble the other half
screwing force: 100-120 Ncm.

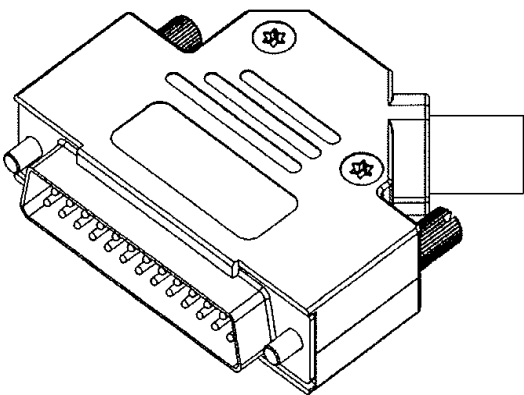

A

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
rev.	description	date	name			
				2012	date	name
				drawn	02.01.	Lehmenkühler
				appd.	02.01.	Fischer
				norm		
				d-old		
a	Original					

scale:	
material:	
title: ASSEMBLY INSTRUCTION METAL HOOD 9pos. EMI/RFI SHIELDING with side cable entry and jack screw 4-40 UNC	
dwg no:	DIN-A
16K1A058A	4
part no:	SEE SHEET 1
	sh:2/2

4

3

2

1