

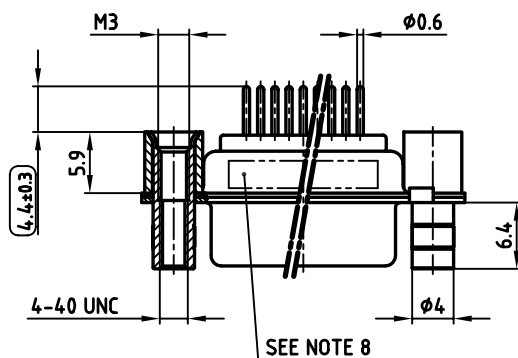


used for: D-SUB

No. of pos.	A -0.76	B $+0.25$	C $+0.12$ -0.13	D -0.3	PART NO.
9	31.19	16.79	25.00	6.12	163A14439X
15	39.52	25.12	33.30	6.12	163A14449X
25	53.42	38.84	47.04	5.99	163A14459X
37	69.70	55.30	63.50	5.99	163A14469X

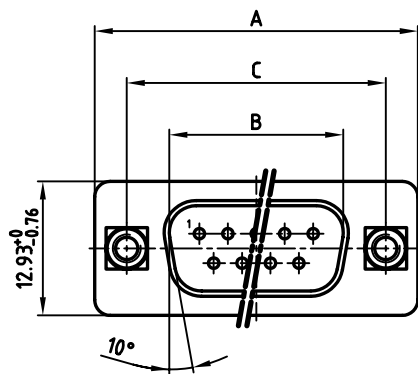

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- THREADED REAR SPACER/FRONT THREADED LOCK:
COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- SLEEVE: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- = CHECK DIMENSION

Directive 2002/95/EC
RoHS
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND


rev.	description	date	name
a	Origin		

tolerance	dim. in mm
2006	date
drawn	07.02. Lehmenkühler
appd.	07.02. Mickenbecker
norm	DIN 41652
d-old	

CONEC


scale:	2:1 (5:1)
material:	SEE NOTES
title:	D-SUB MALE 9-37pos. SOLDER PIN STRAIGHT with threaded rear spacer, front threaded lock
dwg no:	AutoCAD 2004 DIN-A 16K1A1729 3 sh:1/2
part no:	SEE TABLE

9 pos.

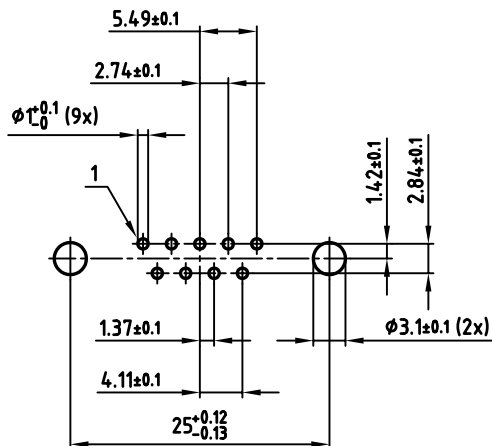


15 pos.


used for: D-SUB

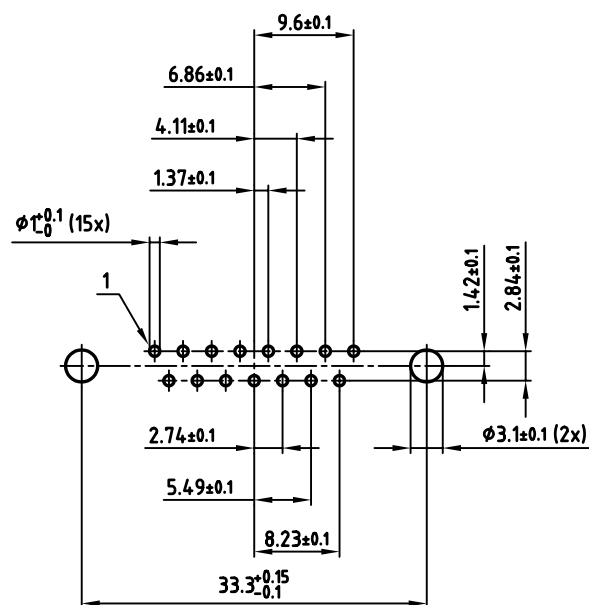

25 pos.

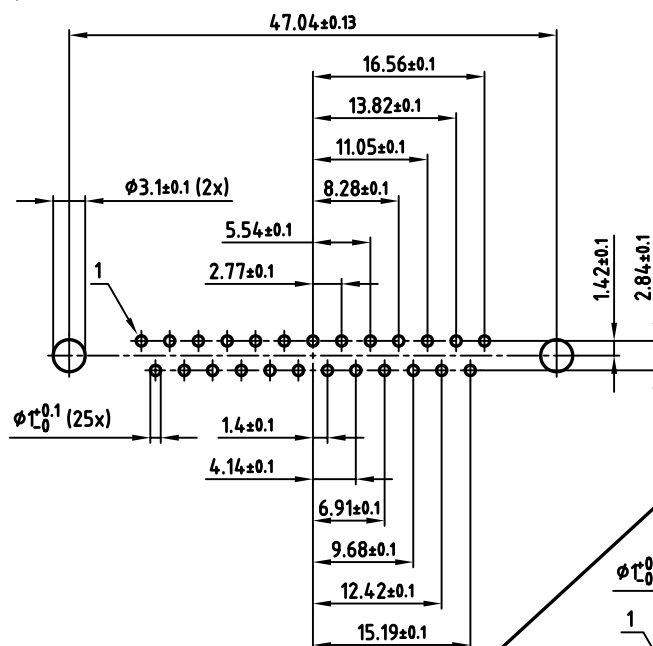

37 pos.

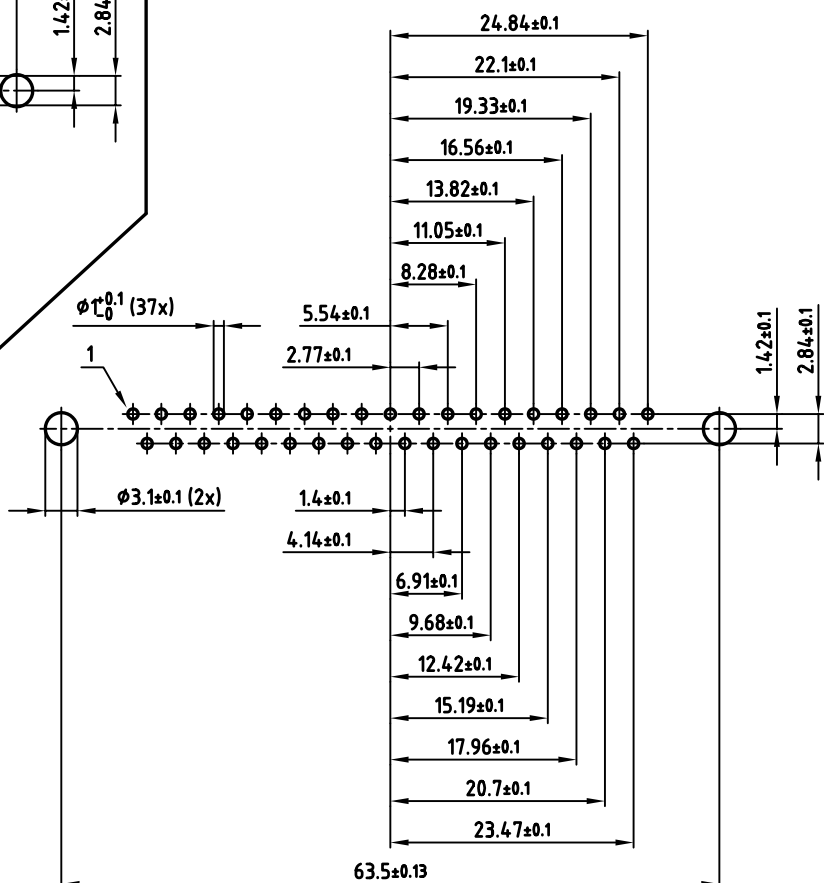

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance



2006	date	name
drawn	07.02.	Lehmenkühler
appd.	07.02.	Mickenbecker
norm	DIN 41652	
d-old		

CONEC

scale:

2:1

material:

SEE SHEET 1

title:

P.C.B. HOLE DRILLINGS
D-SUB MALE 9-37pos. SOLDER PIN
with threaded rear spacer, front threaded lock

dwg no:

AutoCAD 2004 DIN-A

16K1A1729

3 sh:2/2

part no:

SEE SHEET 1