
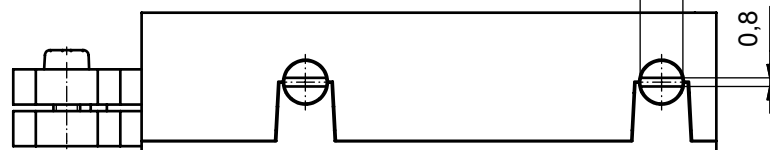
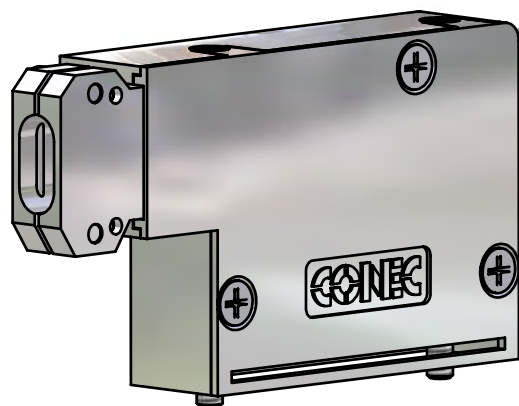
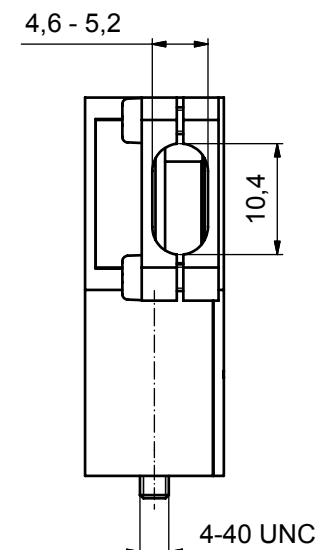
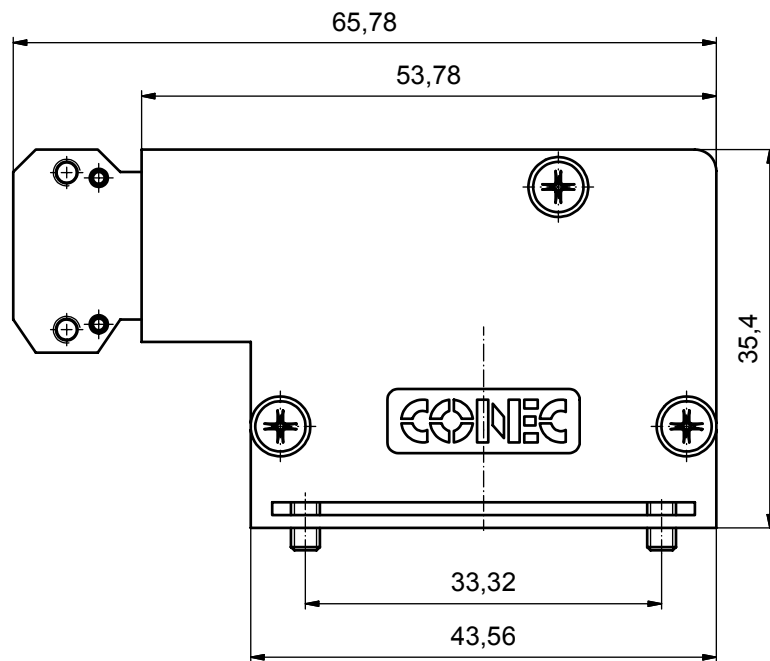
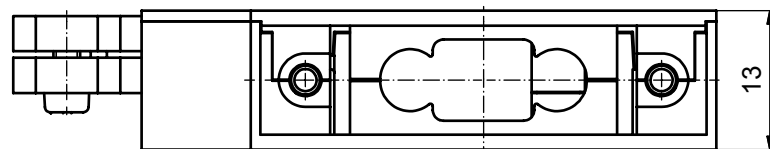


NOTES:

1. HOOD: ZINC DIE CAST; NICKEL PLATED
2. CABLE STRAIN RELIEF: ZINC DIE CAST; NICKEL PLATED
3. PLASTIC SPACERS TO PREVENT MISALIGNMENT OF HIGH POWER CONTACTS:
PBT GF UL 94 V-0; BLACK
4. JACKSCREW: STEEL; NICKEL PLATED; SLOTTED
5. FIXING SCREW: ZINC PLATED; CROSS RECESSED; TYPE H, SIZE 1
6. SCREW FOR CABLE STRAIN RELIEF: ZINC PLATED; CROSS RECESSED; TYPE H, SIZE 1

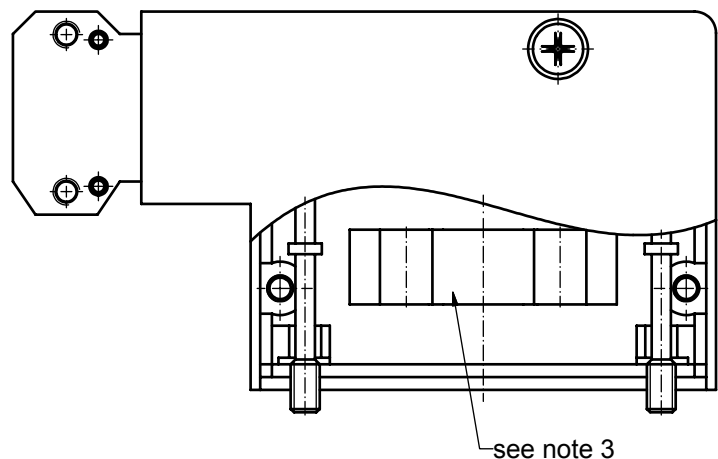

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
rev.	description	date	name				
				date	name		
				drawn	20.09.07	Schmidt	
				appd.	20.09.07	Koch	
				norm			
				d-old	SK0726T1		
a	Origin						

scale:		2:1	
material:		see notes	
title:			
Hood μTCA for use with 7W2 connector side cable exit			
dwg no:		Inventor 10	DIN-A3
		16K1A2148	sh: 1
part no:		16-000010	