




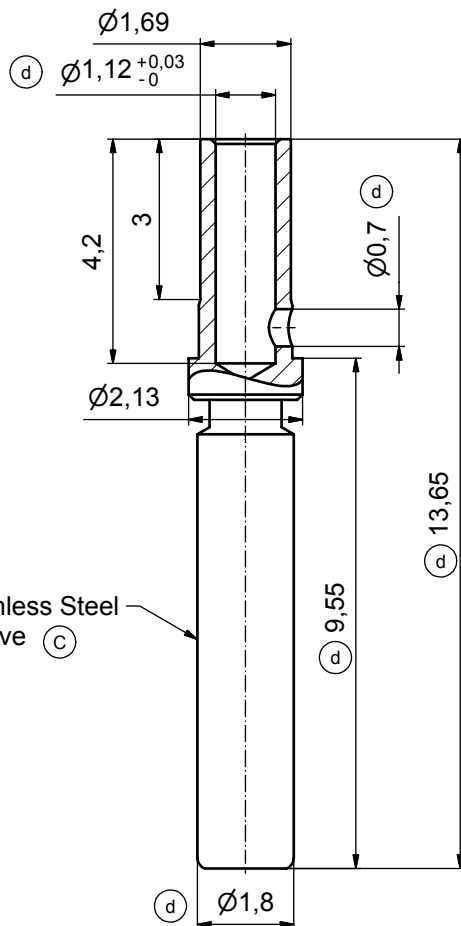

Stainless Steel Sleeve (c)

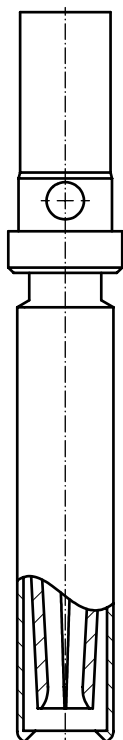

(b) STRIPPING DIMENSIONS

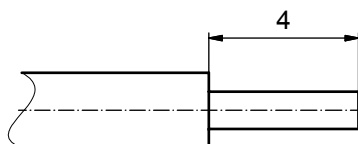

NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE TABLE
- (b) 3. CRIMPING: USE CRIMP TOOL 360X10329X WITH TOOL INSERT 360X20039X
SELECTOR SETTINGS: 7 FOR AWG 20
6 FOR AWG 22
5 FOR AWG 24

Plating	Part no.
min. 30µ" HARD GOLD over min. 50µ" NICKEL	132C15019X
min. 50µ" HARD GOLD over min. 50µ" NICKEL	132J15019X

(c)

Directive 2002/95 EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish:	SEE NOTES				tolerance	ISO 2768-m		dim. in mm
6 x d	Ä 2532	12.07.06	HS	norm	date	30.01.02	name	Parei
2 x c	Ä 2193	21.03.05	Lehmen	d-old	appd.	30.01.02	Mickenbecker	
2 x b	Ä 2177	02.03.05	Lehmen					
a	Origin							
rev.	description	date	name					

CONEC

scale:	10:1		
material:	SEE NOTES		
title:	SIGNAL CRIMP CONTACT SOCKET CONTACT Wire Size 20-24		
dwg no:	Inventor 10 (d)	DIN-A3	sh: 1
part no:	SEE TABLE		