

4

3




2

1

used for:

D-SUB

Part-No.	No. of pos.	A -0.76	B -0.25	C
164A10119X	9	31.19	16.46	25.00 $+0.12$ -0.13
164A10129X	15	39.52	24.79	33.30 $+0.15$ -0.1
164A10139X	25	53.42	38.50	47.04 ± 0.13
164A10149X	37	69.70	54.96	63.50 ± 0.13

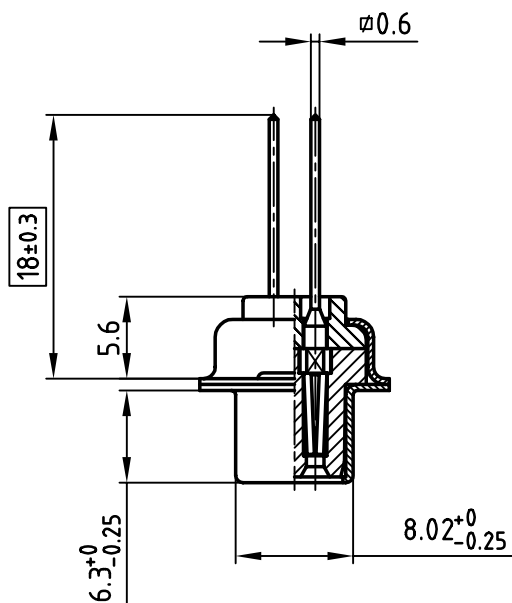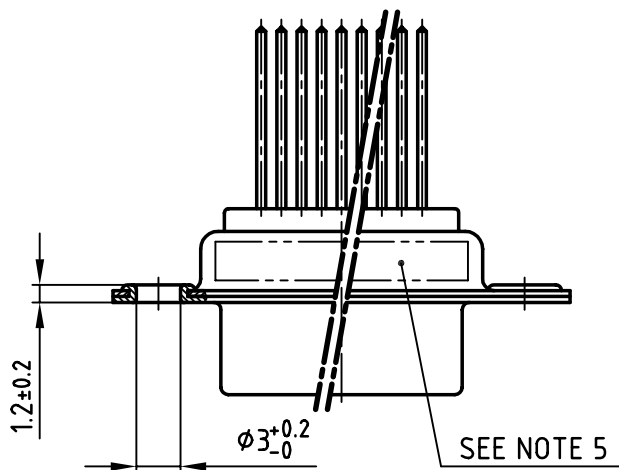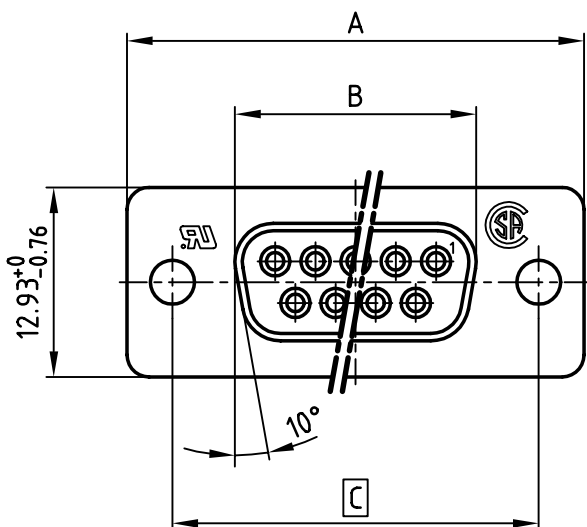

NOTES:

1. METALSHELLS: STEEL; min. 320 μ " TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
5. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
6. = CRITICAL DIMENSION

Directive 2002/95/EC
"RoHS"
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2002	date	name	
				drawn	15.05.	E. Mickenbecker	
				appd.	15.05.	J. Resonnek	
				norm	DIN 41652		
				d-old			
rev.	description	date	name				

4

3

2

1