

4

3




2

1

used for:

D-SUB

Part-No.	No. of pos.	A -0.76	B -0.25	C
164A10419X	9	31.19	16.46	25.00 $+0.12$ -0.13
164A10429X	15	39.52	24.79	33.30 $+0.15$ -0.1
164A10439X	25	53.42	38.50	47.04 ± 0.13
164A10449X	37	69.70	54.96	63.50 ± 0.13

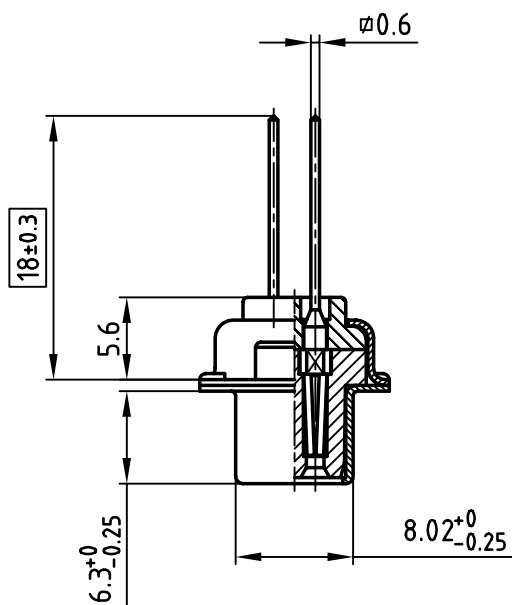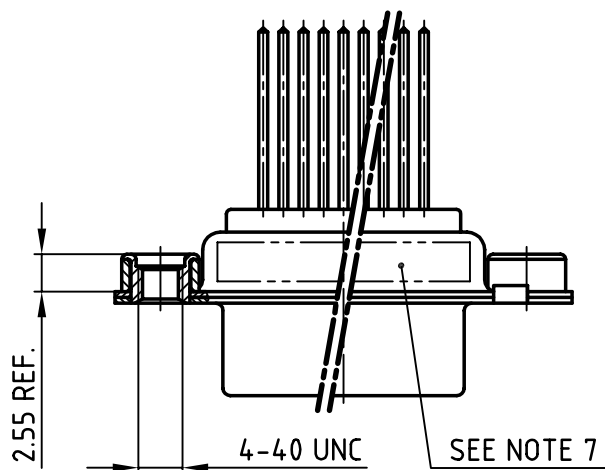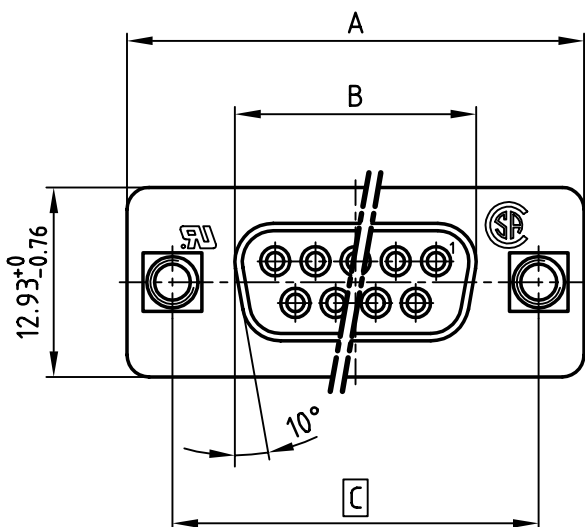

NOTES:

- METAL SHELLS: STEEL; min. 320 μ " TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: min. 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- COLLAR: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
- = CRITICAL DIMENSION

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2002	date	name	
				drawn	08.07.	Parei	
				appd.	08.07.	E. Mickenbecker	
				norm	DIN 41652		
				d-old			
rev.	description	date	name				

4

3

2

1