
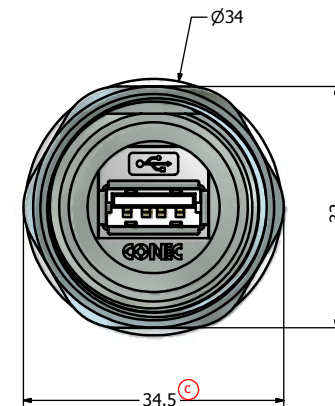
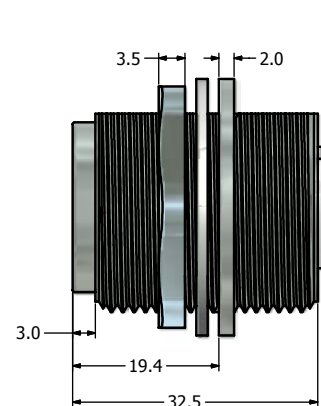
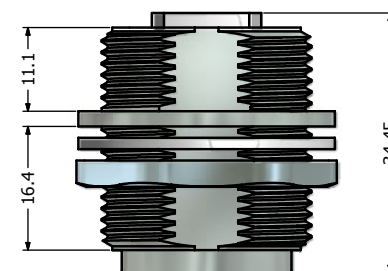
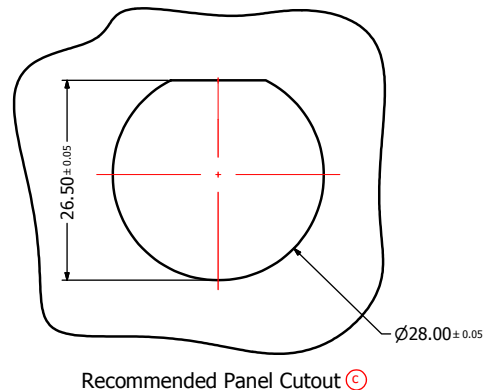


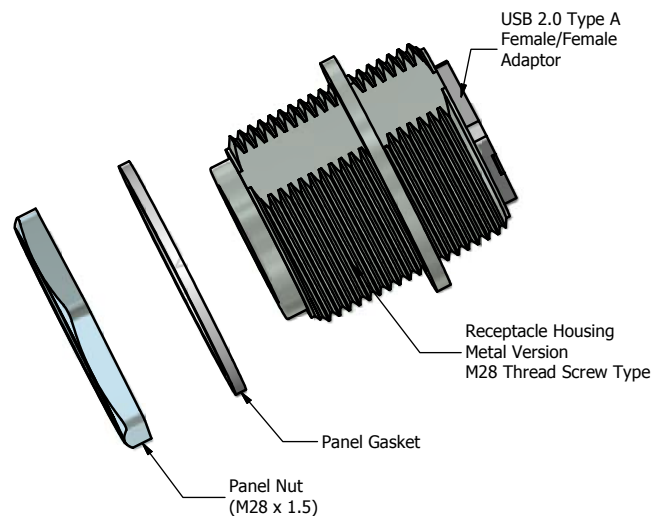

Notes:

- Electrical Specifications:
 - Meets USB 2.0 Specification
 - Contact Resistance: 30 mOhm max.
 - Insulation Resistance: 1000 MOhm min. @ 100 VDC
 - Current Rating: 1.5 A max. at 25° C
 - Working Voltage: 30 V (RMS) max.
 - DWV: 500 VAC/60s at sea level
 - Operating Temperature: -40° C to +85° C

2. Material and Finish:

- Receptacle Housing: Brass, Nickel Plated
- Panel Nut: Brass, Nickel Plated
- Panel Gasket: Silicon, Color: White
- USB Adaptor Insulator: PBT, UL94 V-0, Black
- USB Adaptor Metal Shell: Copper Alloy, Nickel Plated
- USB Adaptor Overmold: PBT UL94 V-0, Black
- USB Contacts: Copper Alloy, Finish: 30 u" Gold min. over Nickel

3. Connector can be front or rear mounted to a maximum panel thickness of 3.2 mm.

4. IP67 rated when fully mated with appropriate mating connector

5. RoHS compliant

Pin-Assignment

Type A F	Type A F
Pin1 -----	Pin1
Pin2 -----	Pin2
Pin3 -----	Pin3
Pin4 -----	Pin4
Shell -----	Shell

Directive 2002/95/EC RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	Customer:			Tolerance Unless otherwise specified 0 P/LC ±0.50 1 P/LC ±0.38 2 P/LC ±0.25 3 P/LC ±0.10 ANGLES ±3		Scale: 1.5:1	Dim. in mm	
	Name	Title	Approval Date			Autodesk Inventor	Material: See Notes	
				2008	Date	Name	IP67 USB Receptacle Assembly Kit with USB 2.0 Type A F/F Adaptor Metal Version	
				Draw.	Oct. 31	Vincent Ke		
				Appd.	Oct. 31	J. Chaudry		
				Norm				
	c	Mar/08/2011	Vincent Ke	D-old			Drawing No.: 17K1A114	DIN A3
b	Jun/01/2009	Vincent Ke				Part No.: 17-200321		Sheet 1/1
a	original							
Rev.	Changes	Date	Name					