
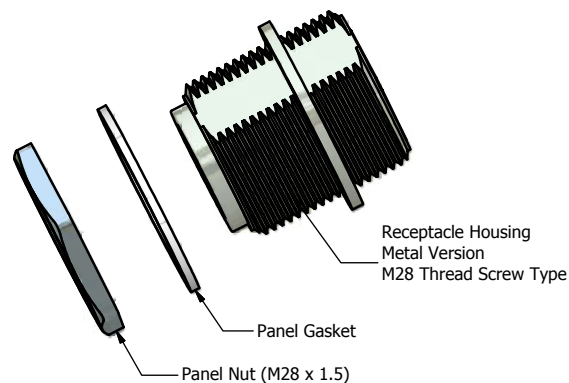
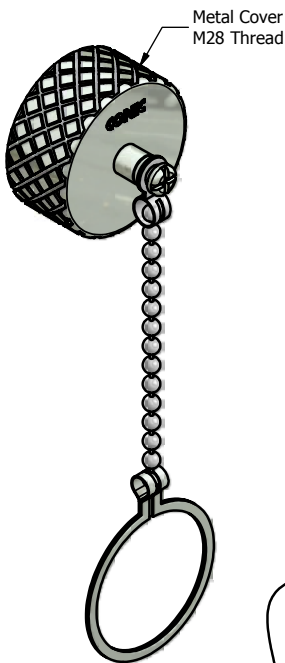

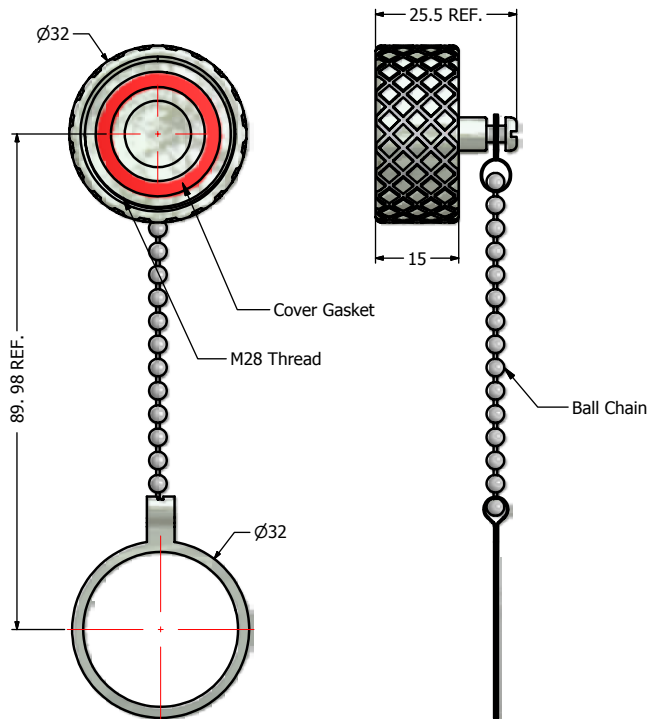
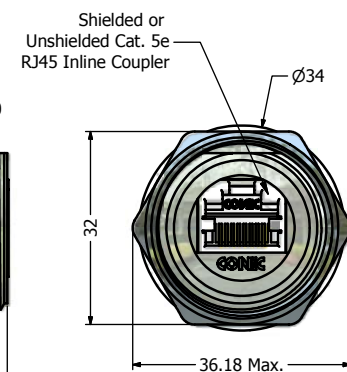


Recommended Panel Cutout



Notes:

1. Electrical Specifications:

- Meets EIA/TIA-568-B.2 Cat.5e Specification
- Contact Resistance: 20mOhm max.
- Insulation Resistance: 500MOhm min. @ 100 VDC
- Current Rating: 1.2A max. at 25° C
- Working Voltage: 100 VDC
- DWV: 1000 VDC/60s Contact to Contact, 1500 VDC/60s Contact to Metal Shell
- Operating Temperature: -40° C to +85° C

2. Material and Finish:

- Receptacle Housing, Metal Cover, Panel Nut: Brass, Nickel Plated
- Ball Chain: Copper Alloy, Nickel Plated
- Panel Gasket: Silicone, Color: White
- Cover Gasket: Silicone, Color: Red
- RJ45 Jack Metal Shell: Copper Alloy, Nickel Plated
- RJ45 Jack Plastic Housing: Glass filled PBT UL94 V-0, Color: Black
- RJ45 Jack Contacts: Phosphor Bronze, Finish: 50u" Gold min. over Nickel

3. Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.

4. RoHS compliant

Directive 2002/95/EC
"RoHS"
Compliant

Description	Part Number
Metal Version Receptacle + Cover with Shielded RJ45 Inline Coupler	17-101604
Metal Version Receptacle + Cover with Unshielded RJ45 Inline Coupler	17-101614

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT THE WRITTEN OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	Customer:				Tolerance Unless otherwise specified			Scale: 1:2:1		Dim. in mm	
	Name		Title		Approval Date			Autodesk Inventor		Material: See Notes	
					2009	Date	Name		Title		
					Draw.	Jun. 05	Vincent Ke		Receptacle + Cover Assembly Kit		
					Appd.	Jun. 05	J. Chaudry		with Cat. 5e RJ45 Inline Coupler		
					Norm				Metal Version		
					D-old						
							Drawing No.: 17K1A249		DIN A3		
	a	original					Part No.: SEE P/N TABLE		Sheet 1/1		
	Rev.	Changes	Date	Name							