


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY-SWITCH

CATALOG LISTING

17AC34-T

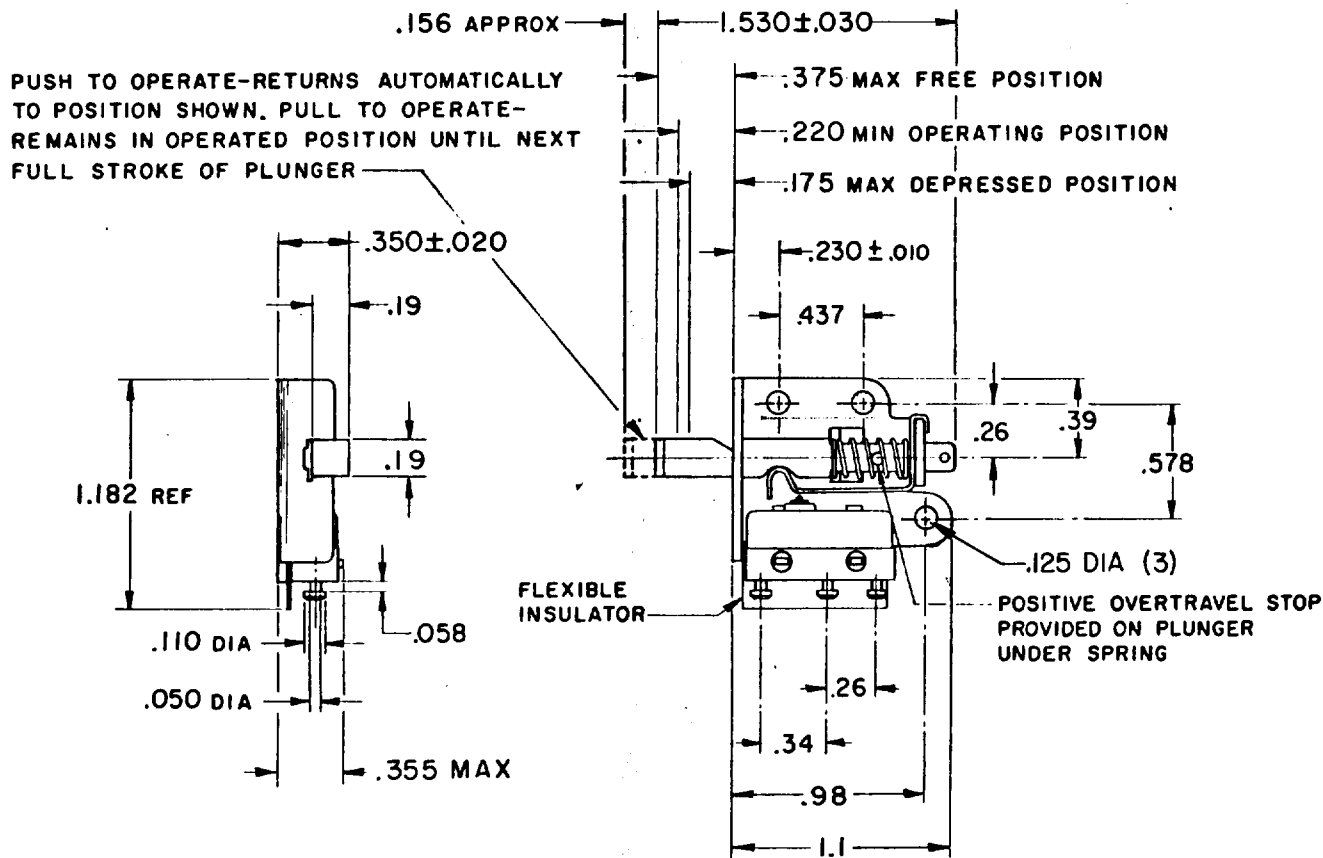

NOTE -

- 1-UNIT INCLUDES CAT. LIST. 11SM357-T BASIC SWITCH (1)
- 2-NOTCH IN ACTUATOR PLUNGER WILL PERMIT .045 MAX DISPLACEMENT BETWEEN END OF PLUNGER AND HOLE IN BRACKET

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

TOTAL TRAVEL
.156 APPROX PUSH DIRECTION
.156 APPROX PULL DIRECTION
FULL OVERTRAVEL --- 2 LB APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

250 VAC --- 5 AMP
30 VOLTS DC RATING
INDUCTIVE --- SEA LEVEL --- 3 AMP
50,000 FT --- 2.5 AMP
RESISTIVE --- SEA LEVEL --- 5 AMP
50,000 FT --- 5 AMP
MAXIMUM INRUSH --- 24 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	
ONE PLACE	X,X	0.4/0.16	X X 0.8/0.3
TWO PLACES	X,X,X	0.15/0.06	X X X 0.38/0.15
THREE PLACES	X,X,X,X		X X X X 0.13/0.05
ANGLES			

SI METRIC ☐ US CUSTOMARY ☒

DESIGN UNITS ☐ WEIGHT .02 LB APPROX

FO-52848-A

DRAWN

SLB 14 OCT 77

CHECK DRAW 19 OCT 77

CHECK

DRAWING NUMBER

RELEASE NO. PR 6770

REPLACES

17AC34-T

M

DRAWING NUMBER

ISSUE

REVISIONS