

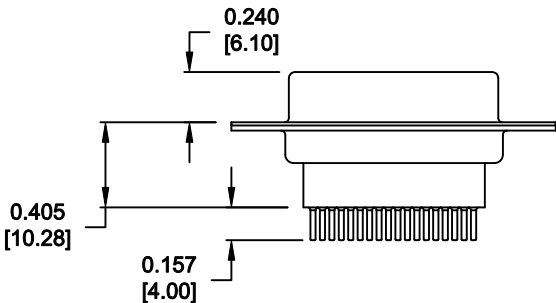


DESCRIPTION: HIGH DENSITY VERTICAL HIGH PROFILE MACHINED

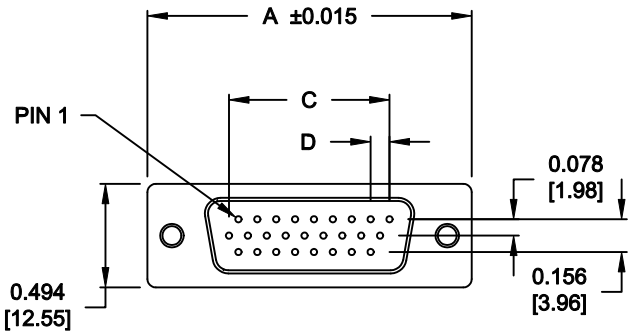

No. OF PINS	DIMENSIONS (IN.)			
	A	B	C	D
15	1.214 [30.84]	0.984 [24.99]	0.405 [10.29]	0.090 [2.29]
26	1.545 [39.24]	1.312 [33.32]	0.765 [19.43]	0.090 [2.29]

MATERIAL:

INSULATOR: PBT, UL94V-0, 230°C PROCESS TEMP.,
CHEMICAL RESISTANCE, COLOR - BLACK
SHELL: STEEL, NICKEL PLATED
CONTACT: PHOSPHOR BRONZE, GOLD FLASH
ENTIRE CONTACT

ELECTRICAL:

CURRENT RATING: 2 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 1,000VAC rms
INSULATION RESISTANCE: 5,000 MegOhms Min.
CONTACT RESISTANCE: 10 MilliOhms Max.
WORKING TEMPERATURE: -55°C TO +125°C

196-YYY-213LYY1

SERIES _____
POSITIONS _____
015 _____
026 _____
GENDER _____
2 = FEMALE _____
TERMINATION _____
1 = PC MOUNT _____
SHELL PLATING _____
3 = NICKEL PLATED _____
RoHS COMPLIANT (LOW TEMP. PROCESS) _____
HARDWARE OPTIONS _____
00 = 0.120" MOUNTING HOLE _____
03 = 4-40 HEX STANDOFFS _____
55 = 4-40 INSERTS _____
PLATING _____
1 = GOLD FLASH _____


DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 09-15-05	
		CHECKED:		DATE:	
NorComp		SCALE: 1 : 1	SHEET 1 OF 3		REV 5
		DWG NO. 196-YYY-213-LYY1			


RoHS COMPLIANT

TOLERANCE:
ALL DIMENSIONS ARE ±0.010

55X 0.158" (BOARD SIDE)



03X 0.158" (BOARD SIDE) - 0.230" MATING SIDE

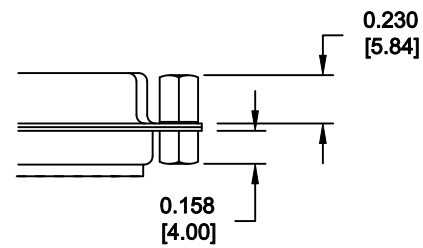

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 11-19-10	
		CHECKED:		DATE:	
NorComp	SCALE:	SHEET 3 OF 3			REV 5
	DWG NO. 196-YYY-213-LYY1				