
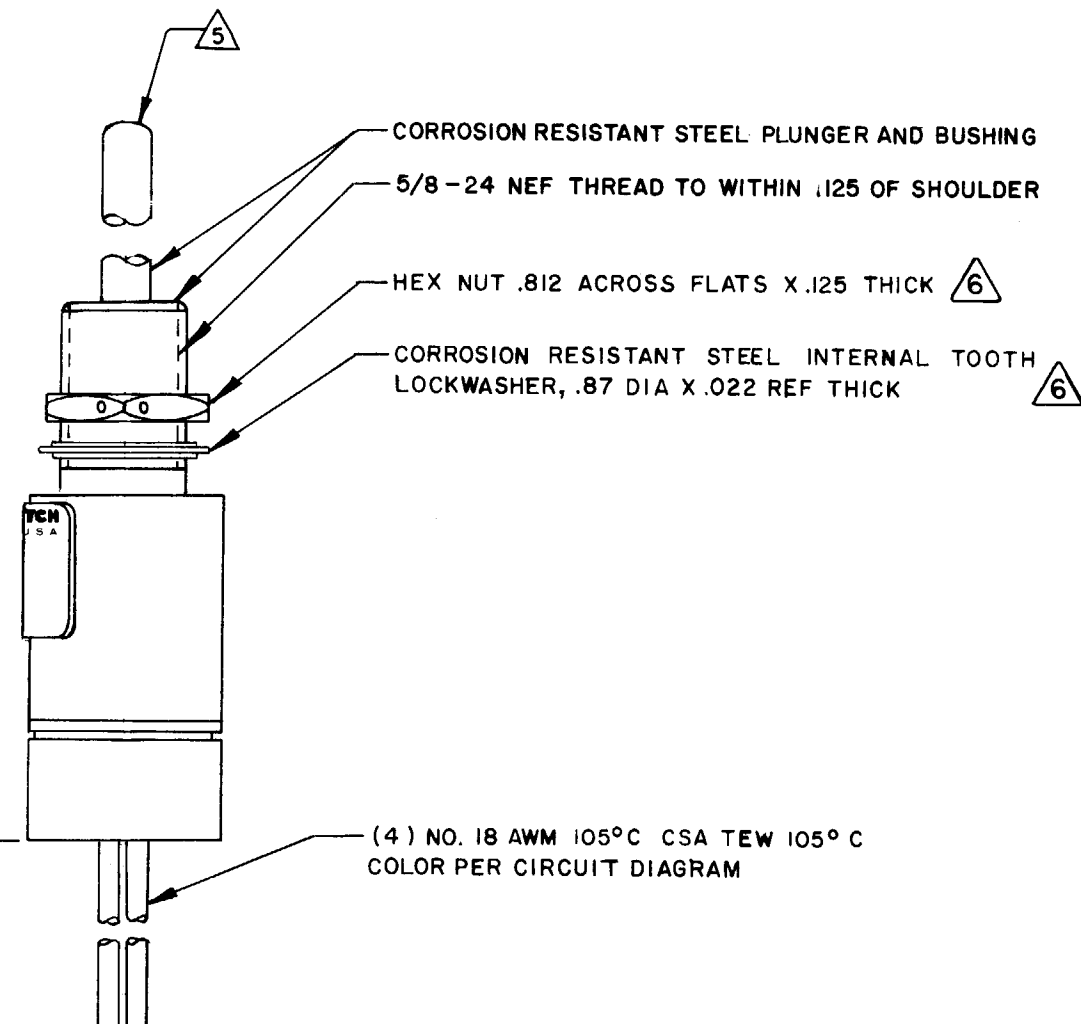
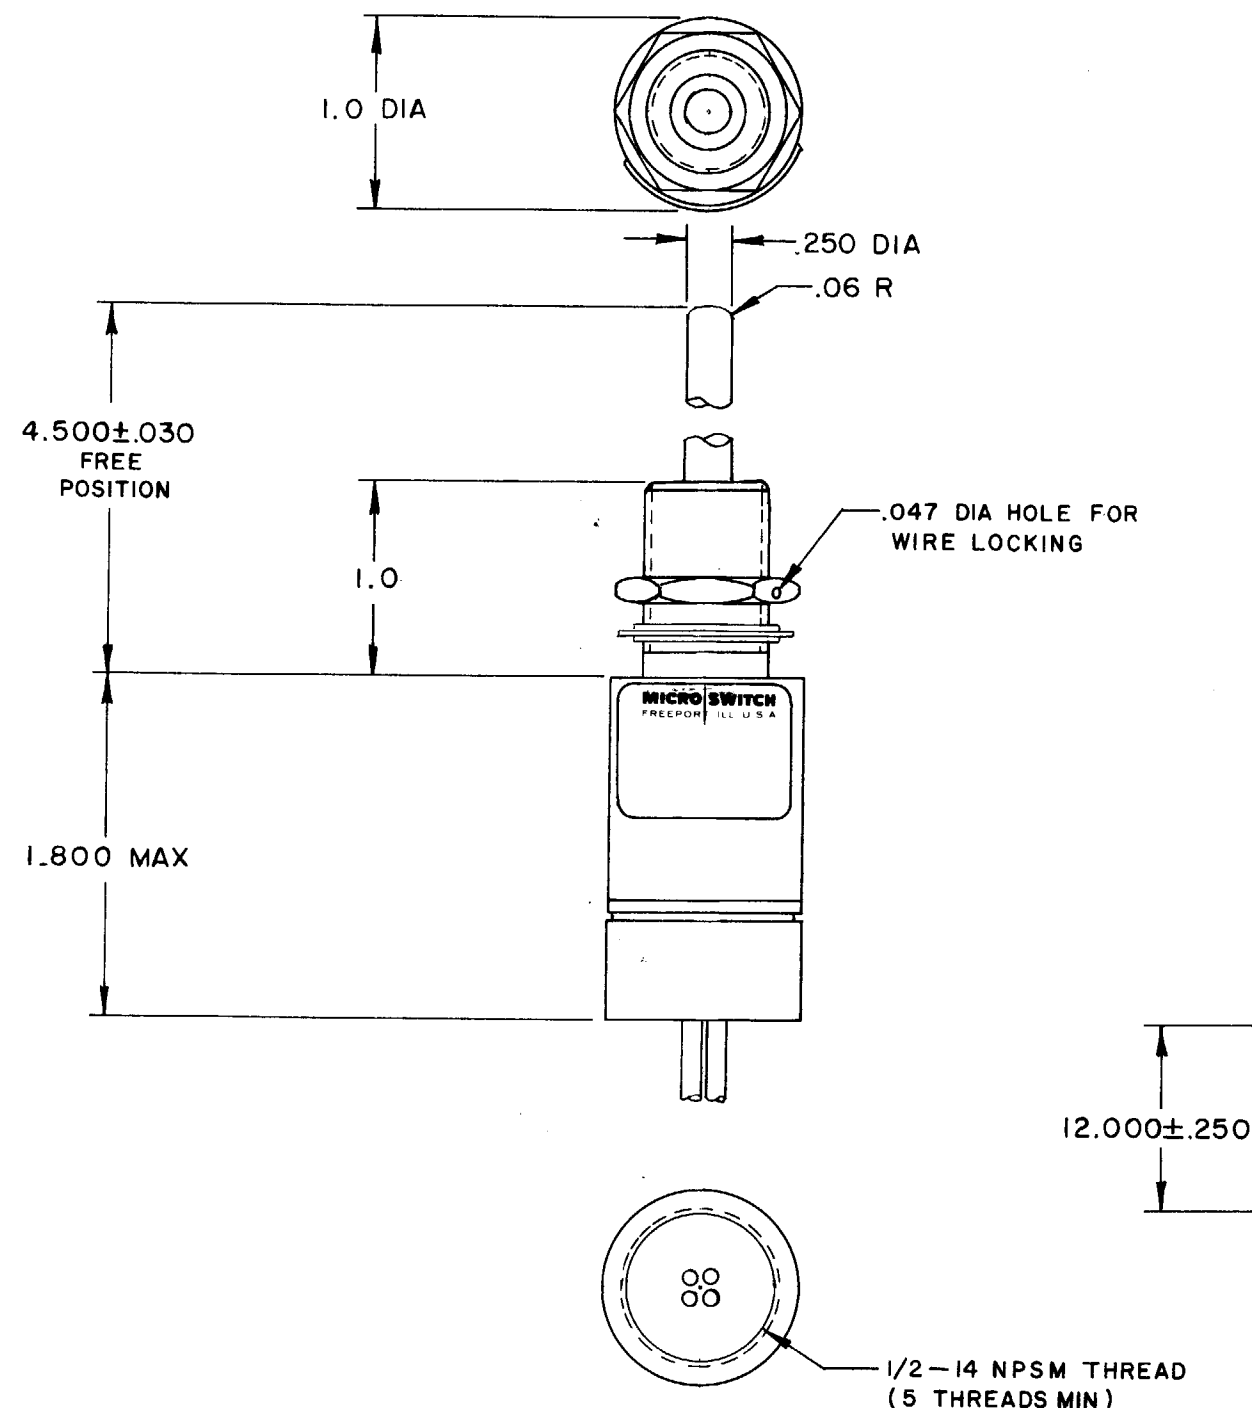


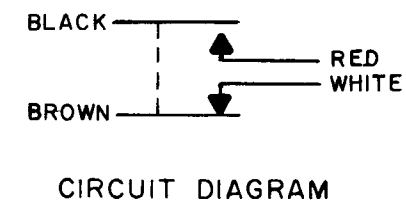

NOTES

- 1 - ENCLOSURE FINISHED WITH GREEN EPOXY BASED ENAMEL COLOR NO. 34151 PER FEDERAL STANDARD 595
- 2 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- 3 - CIRCUIT DIAGRAM, CATALOG LISTING AND DATE CODE ARE SHOWN ON NAMEPLATE
- 4 - SWITCH SEALED PER MIL-S-8805 SYMBOL 3
- 5 - EXTERNAL PLUNGER THROUGH HARDENED 43 ROCKWELL C MIN
- 6 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL	
OPERATING FORCE ————10-16 LB		CONTACT ARRANGEMENT			DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE———30 LB MAX		SPNO (I) SPNC (I)			UNLESS OTHERWISE NOTED	
RELEASE FORCE ————8 LB MIN		LOAD	28 VDC		DIMENSIONS ARE IN INCHES	
PRETRAVEL———-.040 MAX			SEA LEVEL		TOLERANCES ARE:	
DIFFERENTIAL TRAVEL———.020 MAX			50,000 FT.		ONE PLACE (.0) ±.030	
OVERTRAVEL———-.100 MIN			RES 4 4		TWO PLACE (.00) ±.015	
			IND 2 2		THREE PLACE (.000) ±.005	
			MOTOR 4		ANGLES ±	
					WEIGHT 6.5 OZ MAX	