

MICRO SWITCH
a Honeywell Division



FED. MFG. CODE 91929

SWITCH – BASIC

CATALOG LISTING


1DM338

MN-D1840

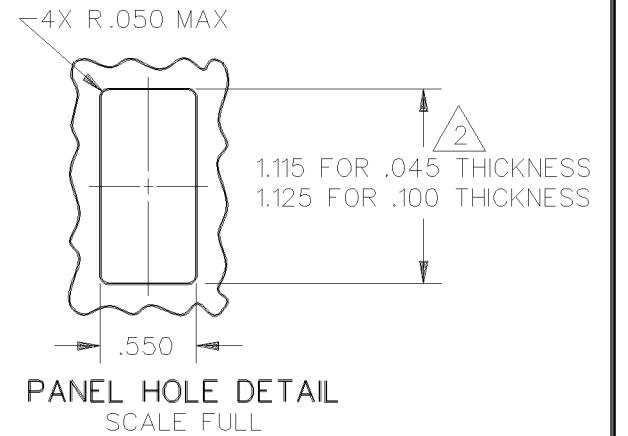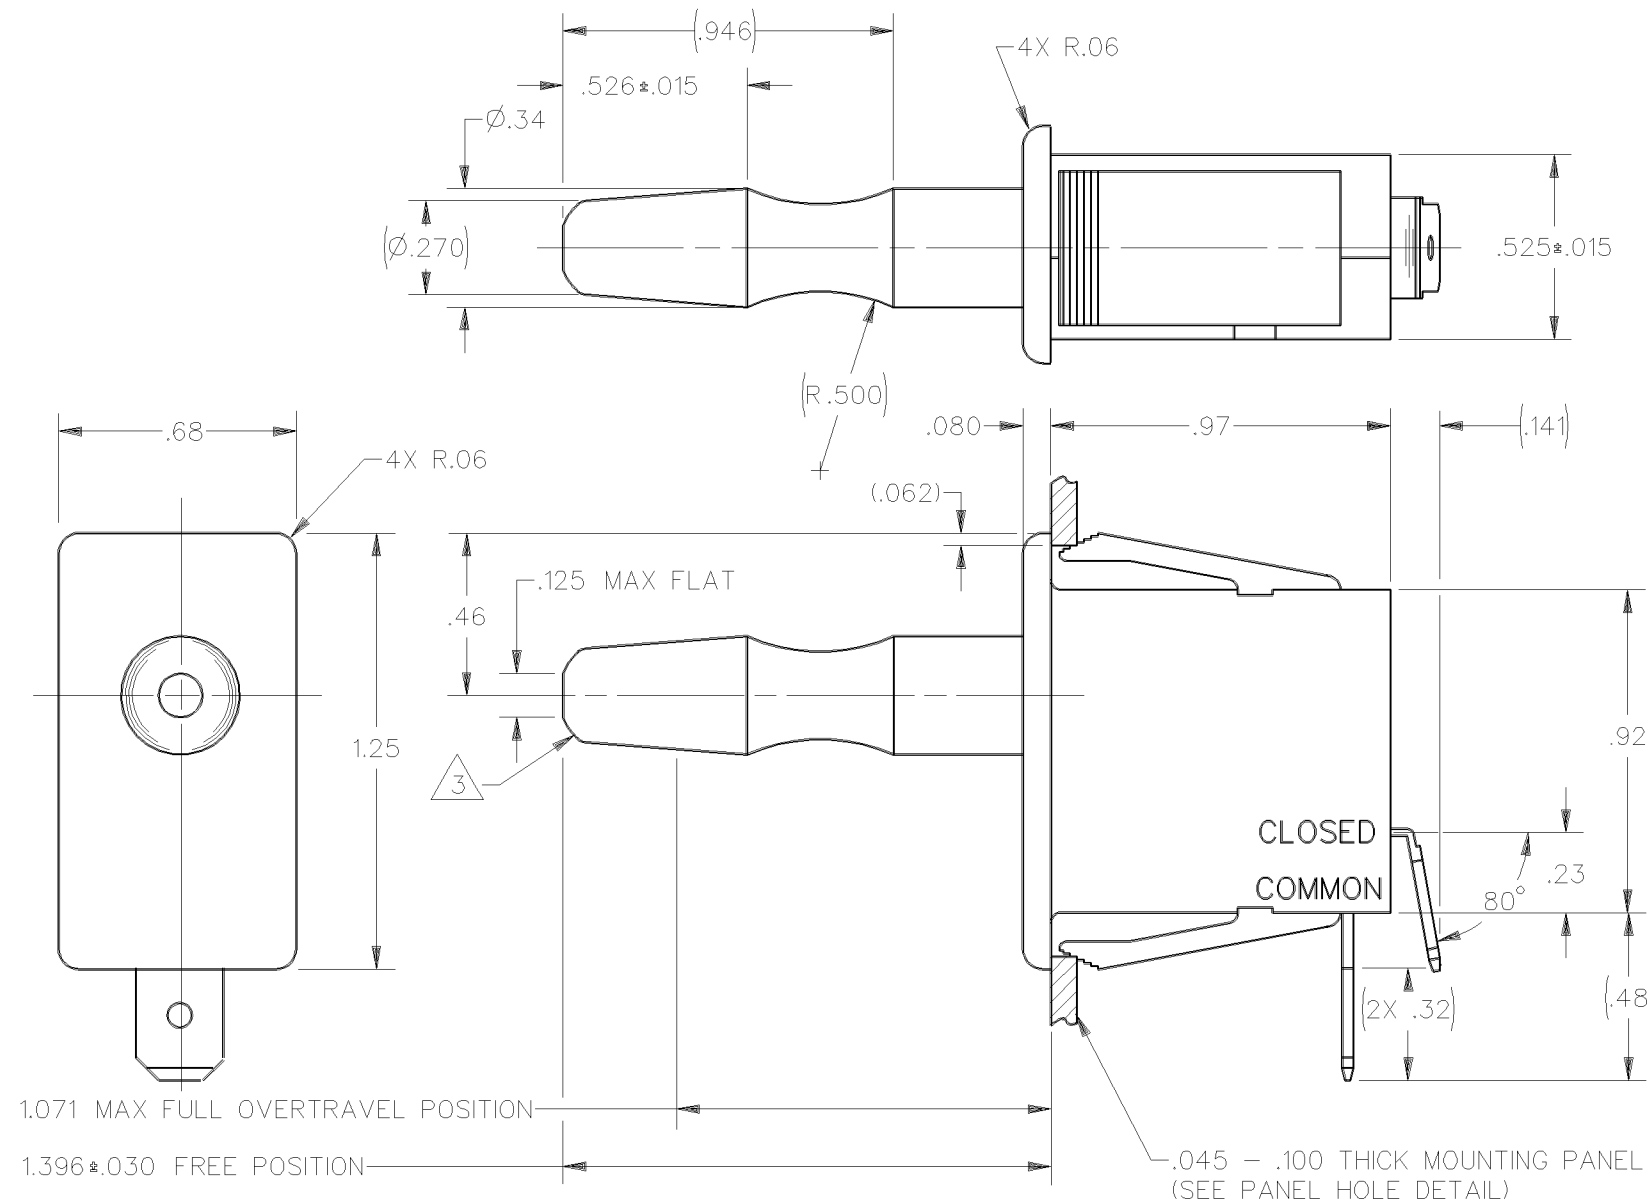

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	$\pm .030$
-----------	------	------------

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES	$\pm 5^\circ$
--------	---------------

WEIGHT

CHARACTERISTICS

OPERATING FORCE — — — — — 15 OZ MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C MAINTAINED CONTACT

L181

10A 1/2HP 125, 250 OR 277 VAC



NOTES

1 - WHITE PLASTIC CASE AND BLACK PLUNGER

2 NOMINAL CUTOUT DIMENSION FOR PANELS BETWEEN .045 AND .100 SHOULD BE
 ^ INTERPOLATED BETWEEN 1.115 AND 1.125

3 PULL TO OPERATE – MAINTAINED, PUSH TO BREAK CIRCUIT

ANSI Y14.5M-1982 APPLIES