

X92968-DP

	1	1DP8 CATALOG LISTING	RELEASE NO. PR-20834-T REPLACES
	ISSUE		

[illegible][illegible]

DJM/CAD	DRAWN	LJF	23 NOV
---------	-------	-----	--------

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION 	
CHARACTERISTICS OPERATING FORCE— — — — 30 OZ MAX RELEASE FORCE— — — — — 3 OZ MIN DIFFERENTIAL TRAVEL — — .045 APPROX		ELECTRICAL DATA CONTACT ARRANGEMENT S P N O 14A 3/4HP 125, 250 VAC PILOT DUTY: 150 VA 125, 250 VAC	
SCALE 2 : 1		DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± 5°		WEIGHT	





NOTES

1 - WHITE PLASTIC CASE AND PLUNGER

 FLAG STYLE QUICK CONNECT RECEPTACLE REQUIRED FOR NORMALLY OPEN TERMINAL IF SWITCH IS WIRED BEFORE MOUNTING

3
NOMINAL CUTOUT DIMENSION FOR PANELS BETWEEN .045 AND .100 SHOULD BE
INTERPOLATED BETWEEN 1.115 AND 1.125

ANSI Y14.5M-1982 APPLIES

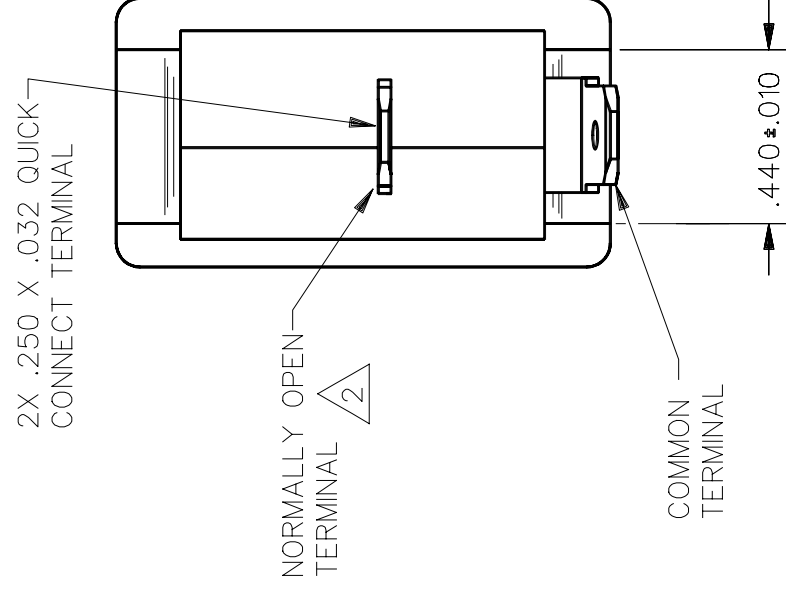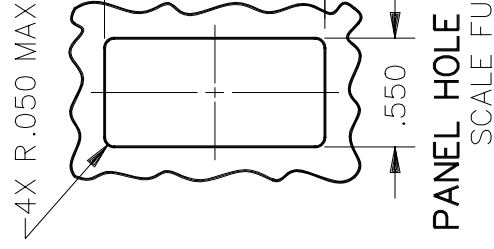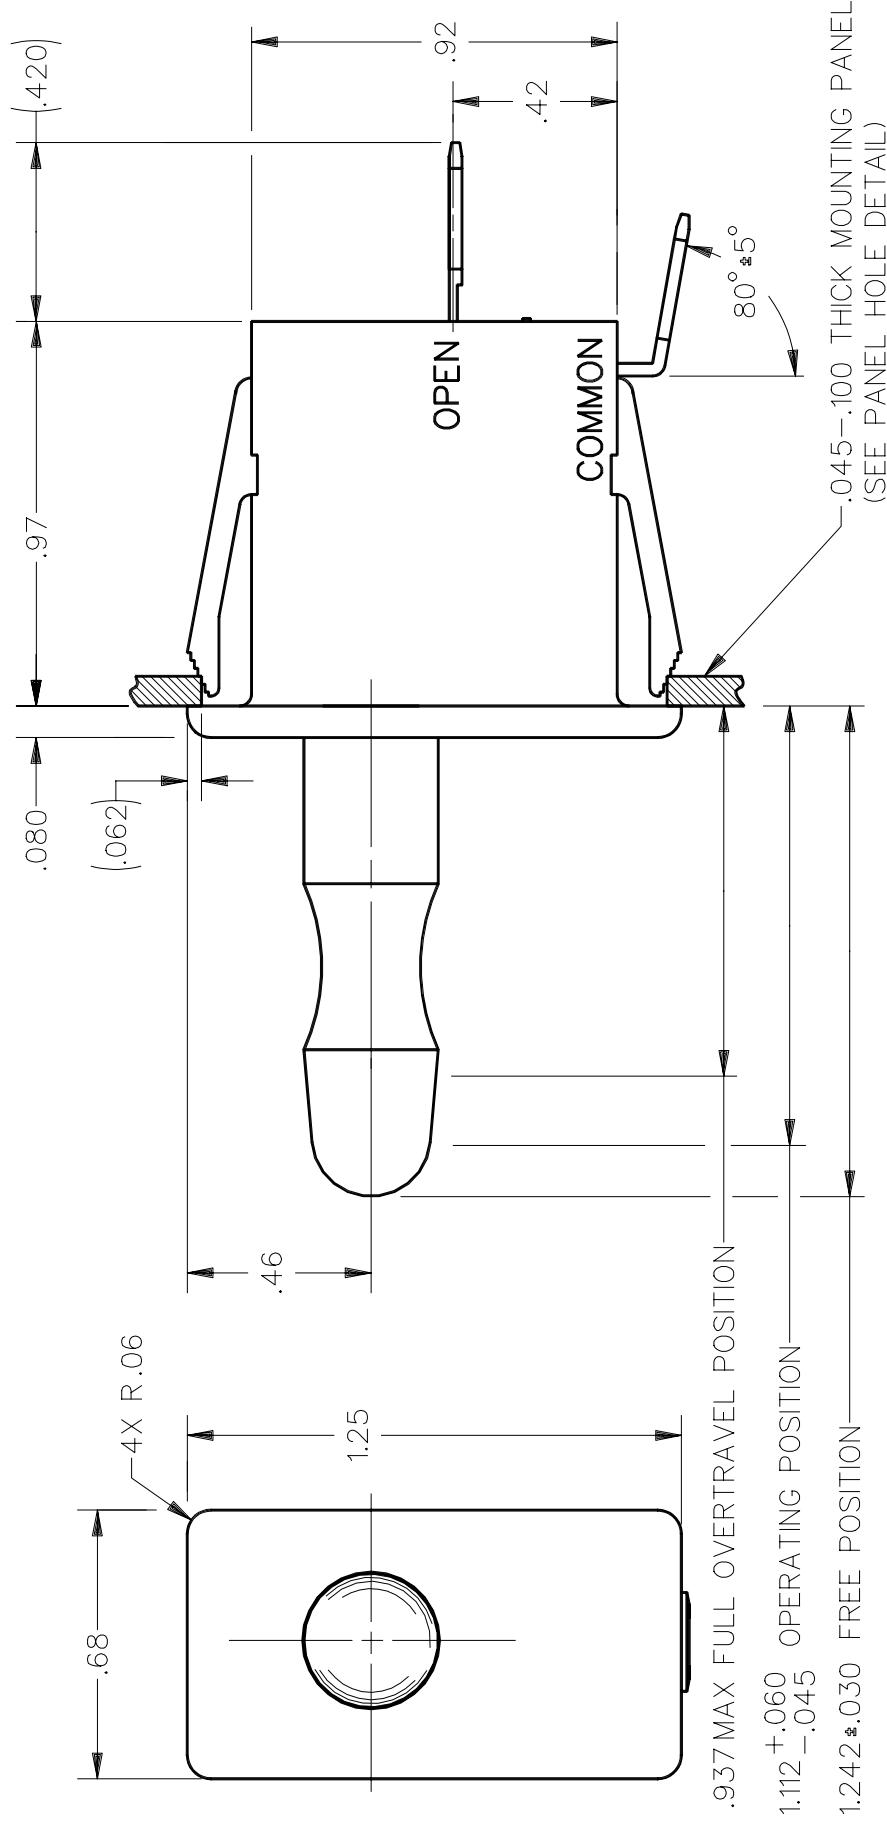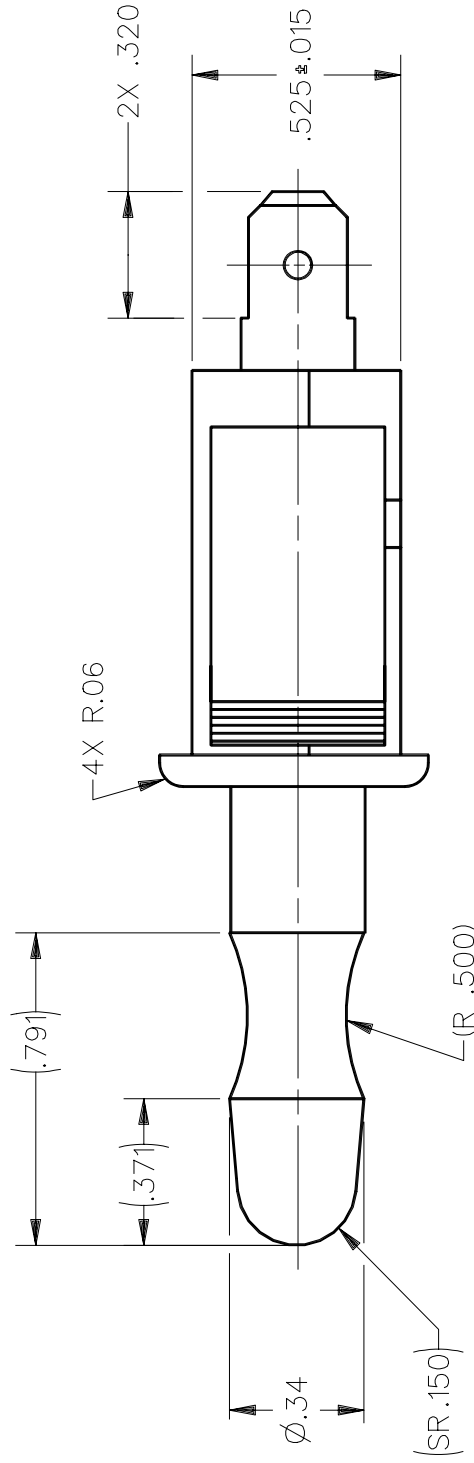

CATALOG LISTING

W

ISSUE

REVISIONS

CHECK

CHECK

CHECK

26

DDM/CAD



Chinese Nationalities Association

WEIGHT

ANSI Y14.5M-1982 APPLIES