
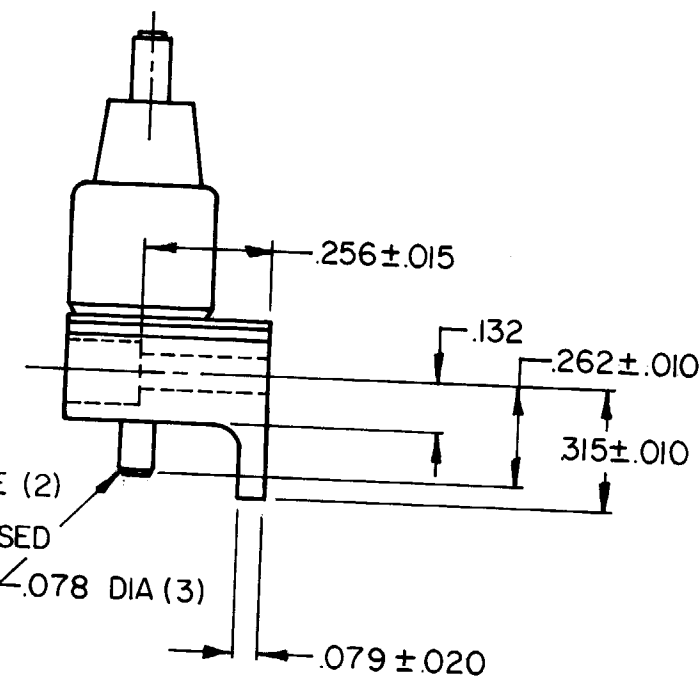
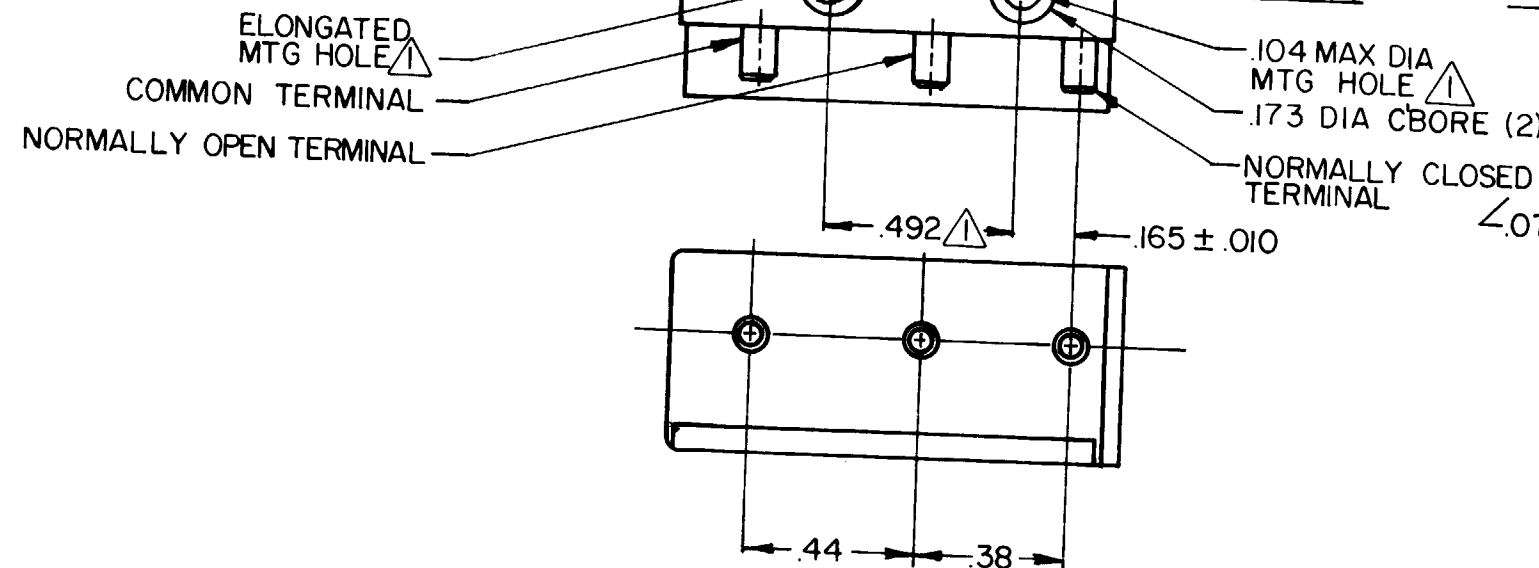
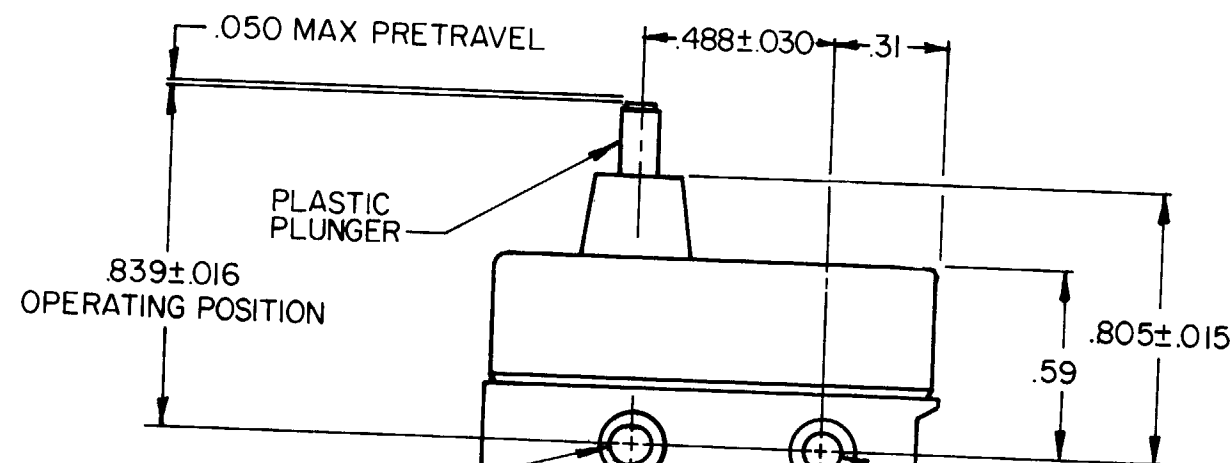


MICRO SWITCH
 FREEPORT, ILLINOIS, U.S.A.
 A DIVISION OF HONEYWELL
 FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
1LZ1

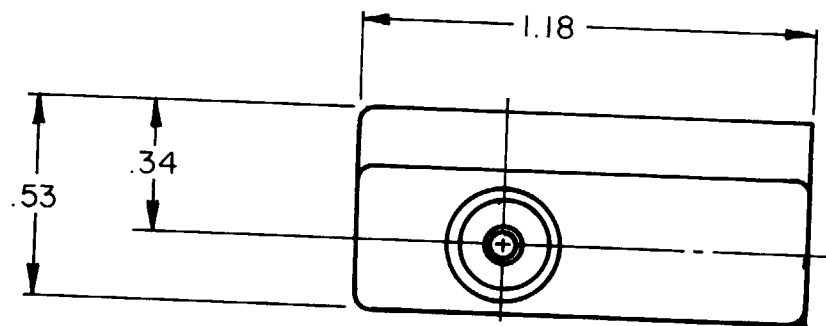

- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .098 MAX DIA ON .492±.002 CENTERS
 - 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 5.0 TO 9.0 OZ
 RELEASE FORCE ----- 3.0 OZ MIN
 DIFFERENTIAL TRAVEL ----- .001 - .004
 OVERTRAVEL ----- .012 MINIMUM

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

10A 125 - 250 VAC
 1/3 HP 125 VAC ; 1/2 HP 250 VAC

SCALE **2 : 1**

DO NOT SCALE PRINT

TOLERANCES

	DIM.	TOL.	DIM.	TOL.
SURF. FIN.	XX	1/64	XX	0.001
ONE PL. FIN.	XX	0.001	XX	0.001
TWO PL. FIN.	XX	0.001	XX	0.001
THREE PL. FIN.	XX	0.001	XX	0.001
ANGLES	XX	1/16	XX	1/16

DESIGN UNITS ☐ SI ☒ INCHES

THIRD ANGLE PROJECTION

WEIGHT

FO-52851-B

DRAWN

S J S 24 JUN 86

CHECK

CHECK

CHECK

REVISIONS

ISSUE

DRAWING NUMBER

M

1LZ1

REPLACES

PR-14857