
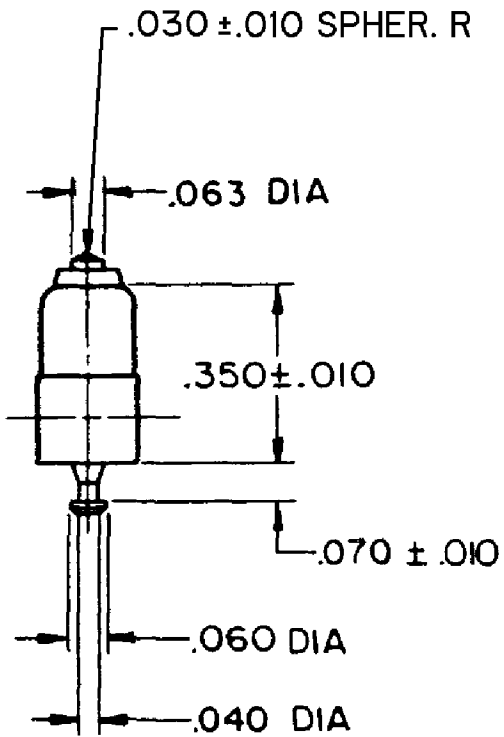
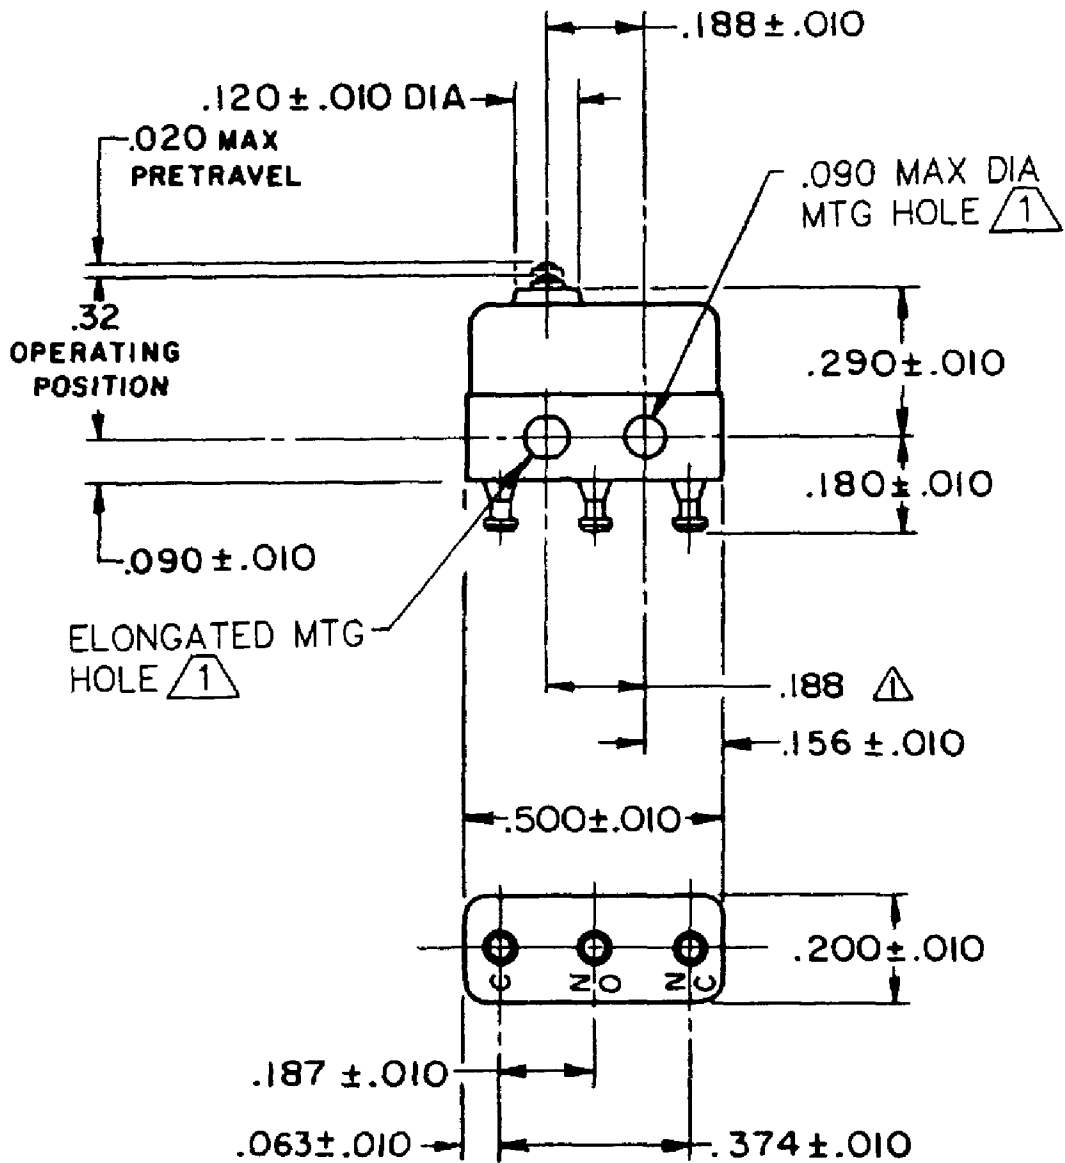



HONEYWELL PART NUMBER
1SX19-T
PRODUCT CODE VDA1950

REV	DOCUMENT	CHANGED BY	CHECK
14	0038446	KVB 20MAY08	BLR

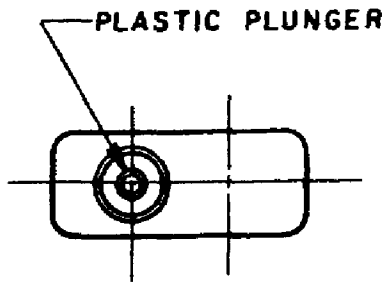

NOTE -
⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING
3-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	SR 10382
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±		DRAWN	SPK	30NOV07	Honeywell			
OPERATING FORCE — — — — 5 OZ MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	30NOV07				
RELEASE FORCE— — — — — 1 OZ MIN		28 VOLTS DC RATING			0.030 0.015 0.005	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .005 MAX			SEA LEVEL	50,000 FT									
OVERTRAVEL — — — — — .004 MIN		MAXIMUM INRUSH 24 AMP				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
		INDUCTIVE	4 AMP	2.5 AMP					B	I	1SX19-T		14
		RESISTIVE	7 AMP	7 AMP	THIRD ANGLE PROJECTION 								
								RASTER		SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1
		APPROVALS	KEMA, CE	7A 250V~ T125 5E4 									
			UL, CSA	7A 250 VAC  BRAND L7									