

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 81928

ASSEMBLY-SWITCH

IAC 24

IAC24

M

DRAWING
NUMBER

X2

ISSUE

REPLACES

PR-3817

CHECK

REVISIONS

A CO
61338
G R T
28 MAY 87

CHECK

4 JAN 74

73

DEC 73

DEC 73


DEC 73

DEC 73

FO-52848

DRAWN

PUSH TO OPERATE - RETURNS AUTOMATICALLY TO POSITION SHOWN
PULL TO OPERATE - REMAINS IN OPERATED POSITION UNTIL RESET FOR
AUTOMATIC RETURN BY NEXT FULL STROKE "PUSH" OPERATION

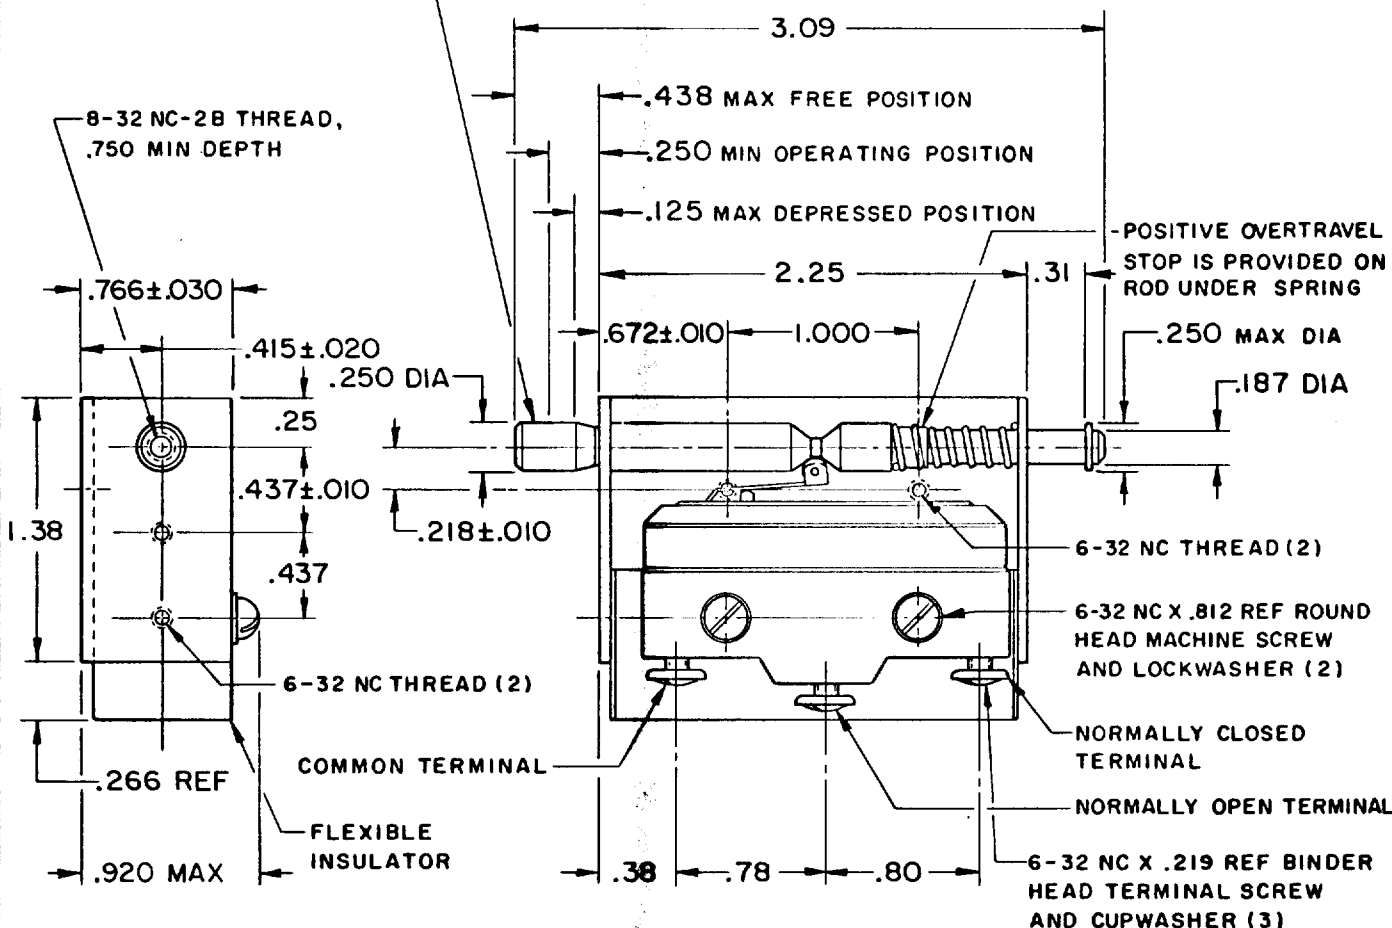

NOTE -

- 1 - UNIT INCLUDES CAT. LIST. BZ-2RL712 BASIC SWITCH
- 2 - NOTCH IN ACTUATOR ROD WILL PERMIT .035 DISPLACEMENT BETWEEN END OF ROD AND HOLE IN BRACKET

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
TOTAL TRAVEL .312 APPROX PUSH DIRECTION .312 APPROX PULL DIRECTION	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE ONE PLACE (.01) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT .190 LB
FULLY DEPRESSED FORCE — — — — — 3 1/2 LB		