


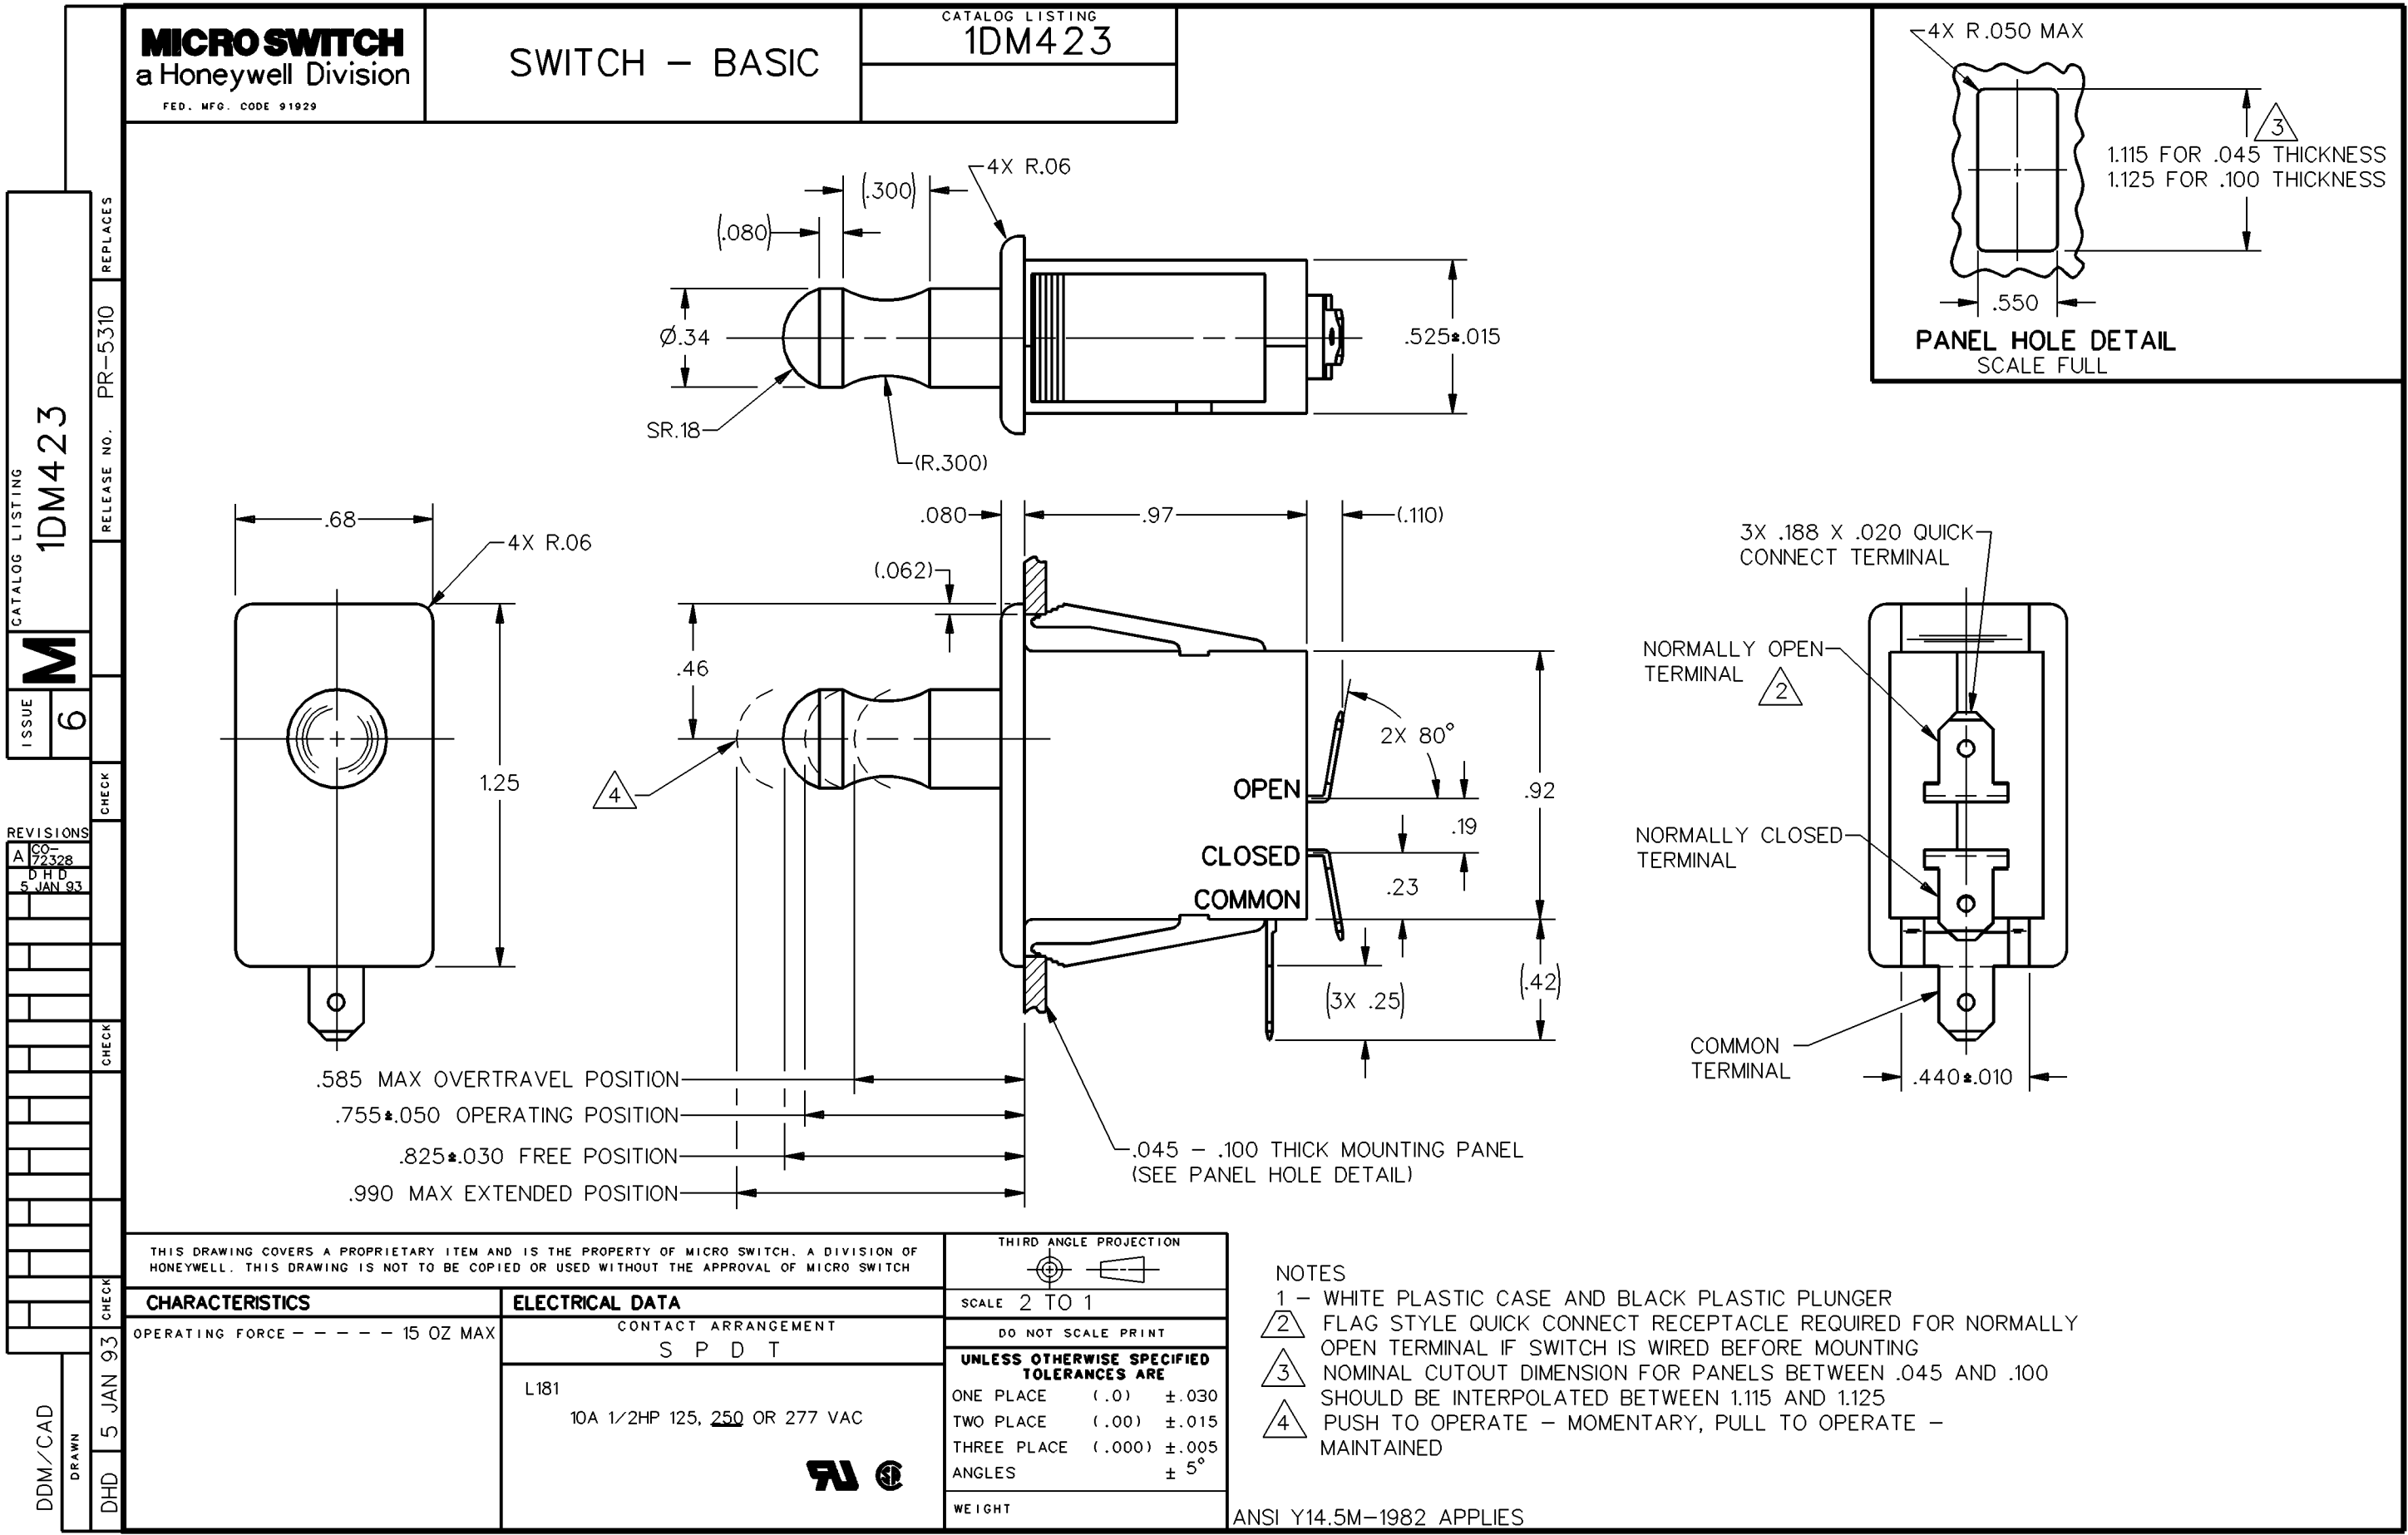

CATALOG LISTING
1DM423
RELEASE NO. PR-5310
REPLACES
ISSUE **M** 6
CHECK
REVISIONS
A CO-72328
DHD
5 JAN 93
CHECK
DHD 5 JAN 93
DRAWN
DDM/CAD

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
1DM423

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE - - - - 15 OZ MAX	CONTACT ARRANGEMENT S P D T
	L181 10A 1/2HP 125, 250 OR 277 VAC

THIRD ANGLE PROJECTION
SCALE 2 TO 1
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) $\pm$.030
TWO PLACE (.00) $\pm$.015
THREE PLACE (.000) $\pm$.005
ANGLES $\pm$ 5°
WEIGHT

NOTES

- 1 - WHITE PLASTIC CASE AND BLACK PLASTIC PLUNGER
- 2 - FLAG STYLE QUICK CONNECT RECEPTACLE REQUIRED FOR NORMALLY OPEN TERMINAL IF SWITCH IS WIRED BEFORE MOUNTING
- 3 - NOMINAL CUTOUT DIMENSION FOR PANELS BETWEEN .045 AND .100 SHOULD BE INTERPOLATED BETWEEN 1.115 AND 1.125
- 4 - PUSH TO OPERATE - MOMENTARY, PULL TO OPERATE - MAINTAINED

ANSI Y14.5M-1982 APPLIES