
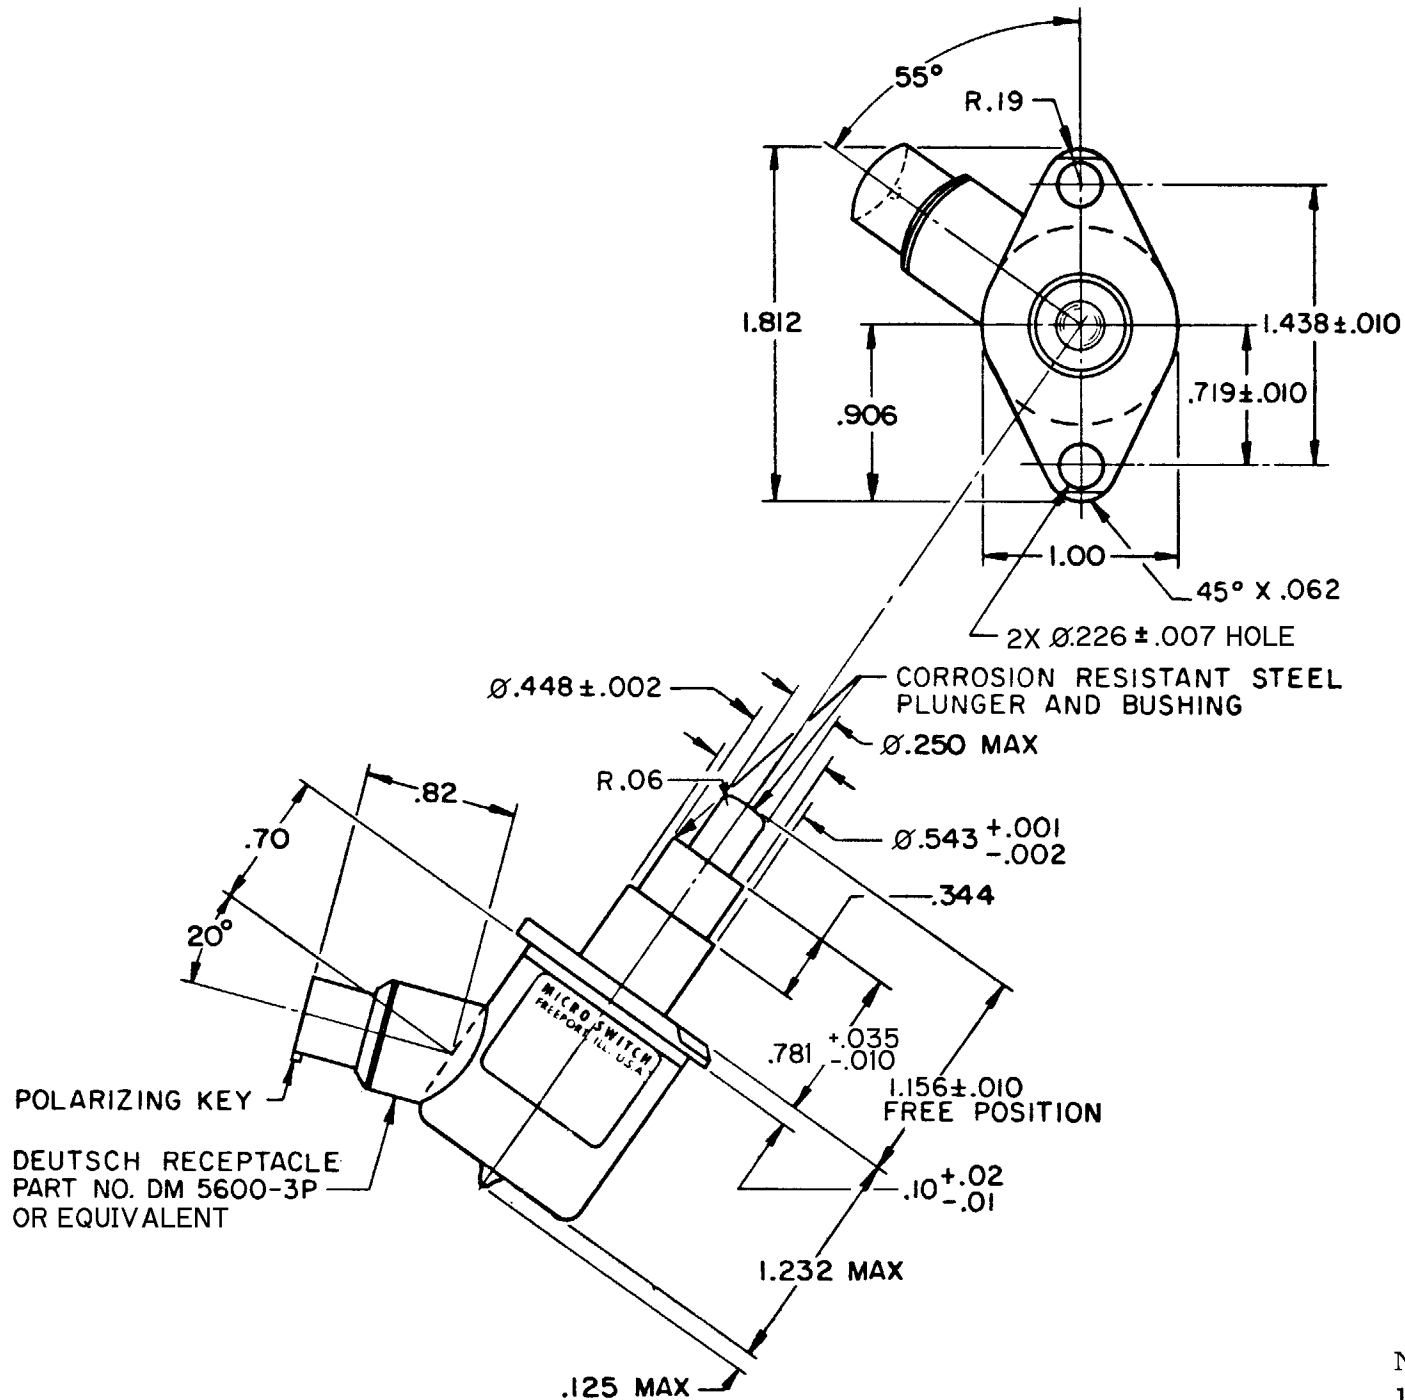


MICRO SWITCH
FREEPORT, ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
1EN32-R

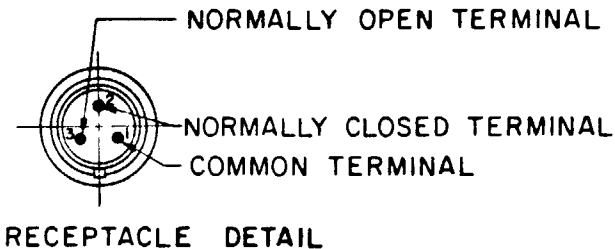

- NOTES
- 1 - ENCLOSURE FINISHED WITH GRAY EPOXY BASED ENAMEL
 - 2 SWITCH SEALED PER MIL - PRF - 8805 SYMBOL 4
 - 3 CIRCUIT DIAGRAM, CATALOG LISTING AND DATE CODE ARE SHOWN ON NAMEPLATE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		THIRD ANGLE PROJECTION	SCALE FULL
DO NOT SCALE PRINT		TOLERANCES	
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±		DIM. TOL. DIM. TOL.	
NO PLACES		mm/in	mm/in
ONE PLACE		mm/in	mm/in
TWO PLACES		mm/in	mm/in
THREE PLACES		mm/in	mm/in
ANGLES		mm/in	mm/in
DESIGN UNITS		US CUSTOMARY	
RAW MATERIAL - COMMERCIAL STANDARD		MICRO SWITCH STANDARDS APPLY	
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		WEIGHT 3.2 OZ MAX	
CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE ----- 6-12 LB		CONTACT ARRANGEMENT	
FULL OVERTRAVEL FORCE ----- 30 LB MAX		S P D T	
RELEASE FORCE ----- 4 LB MIN		28 VDC	
PRETRAVEL ----- .040 MAX		SEA LEVEL 50,000 FT.	
DIFFERENTIAL TRAVEL ----- .020 MAX		LAMP	
OVERTRAVEL ----- .250 MIN			

ANSI Y14.5M-1982 APPLIES