
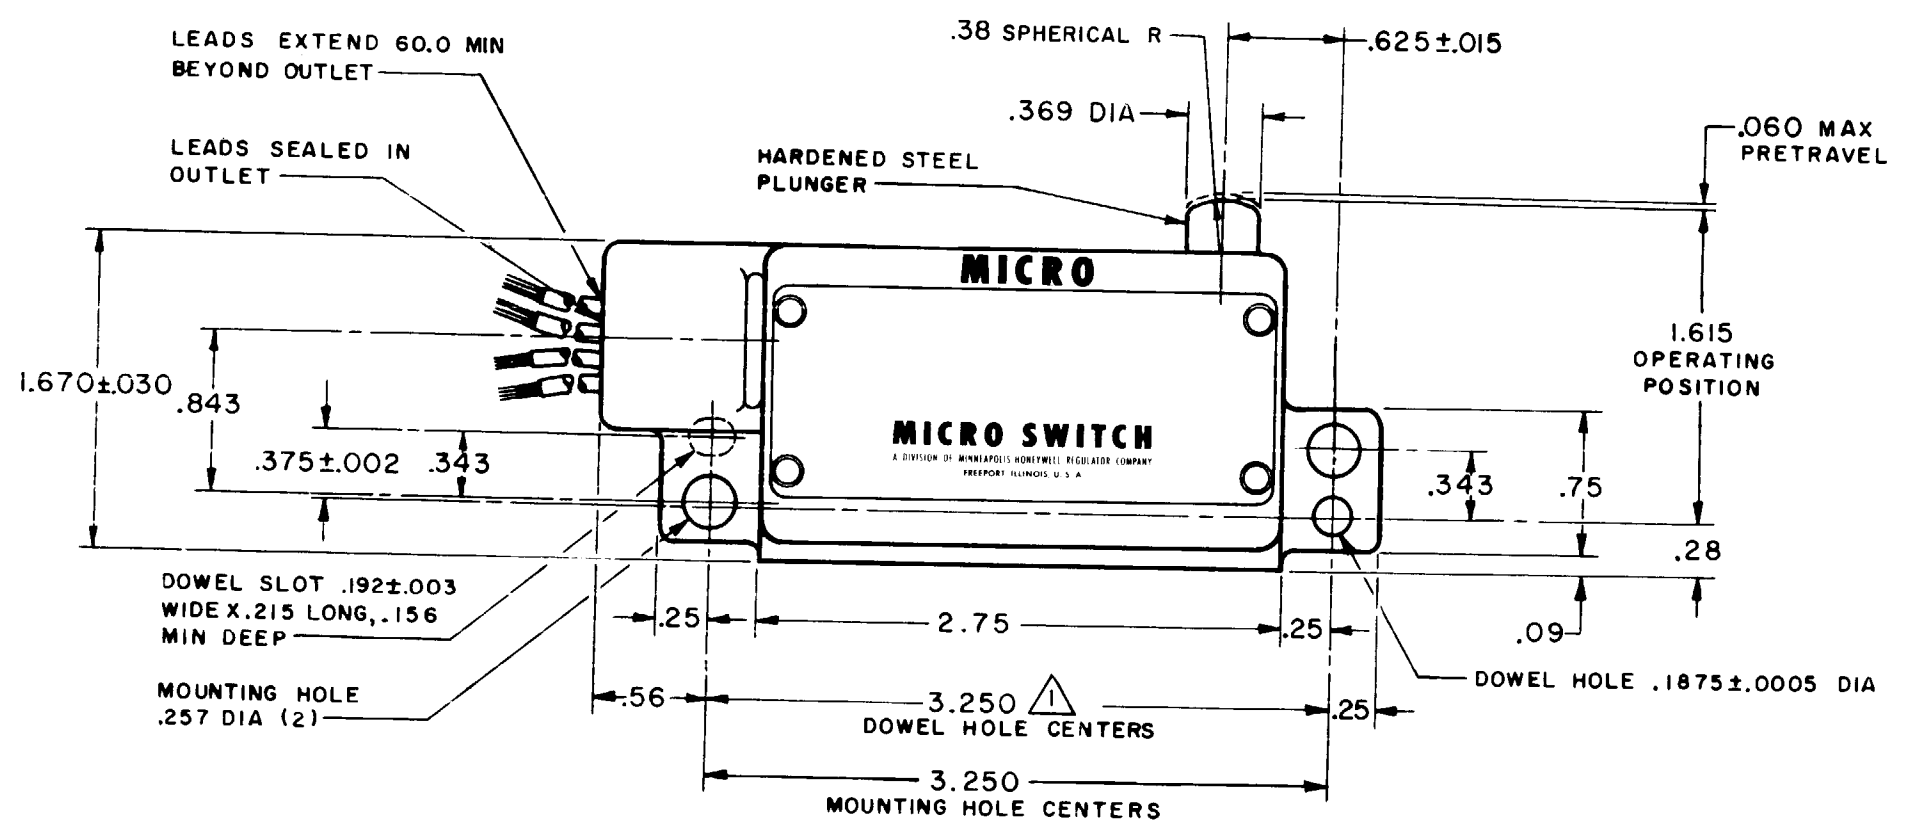
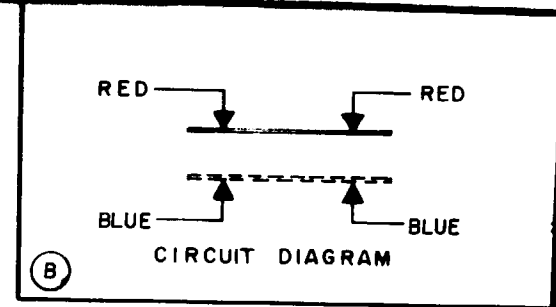


1LN1-5RH
DRAWING NUMBER
ISSUE 5
CHECK
REVISIONS
A CO16227
L M H
SEP 61
B CO18346
VDF
14 NOV 63
C CO55988
M A M
OCT 84
CHECK
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z
LMH 5 SEP 61
DRAWN
FC-30378-003

MICRO SWITCH
A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
1LN1-5RH

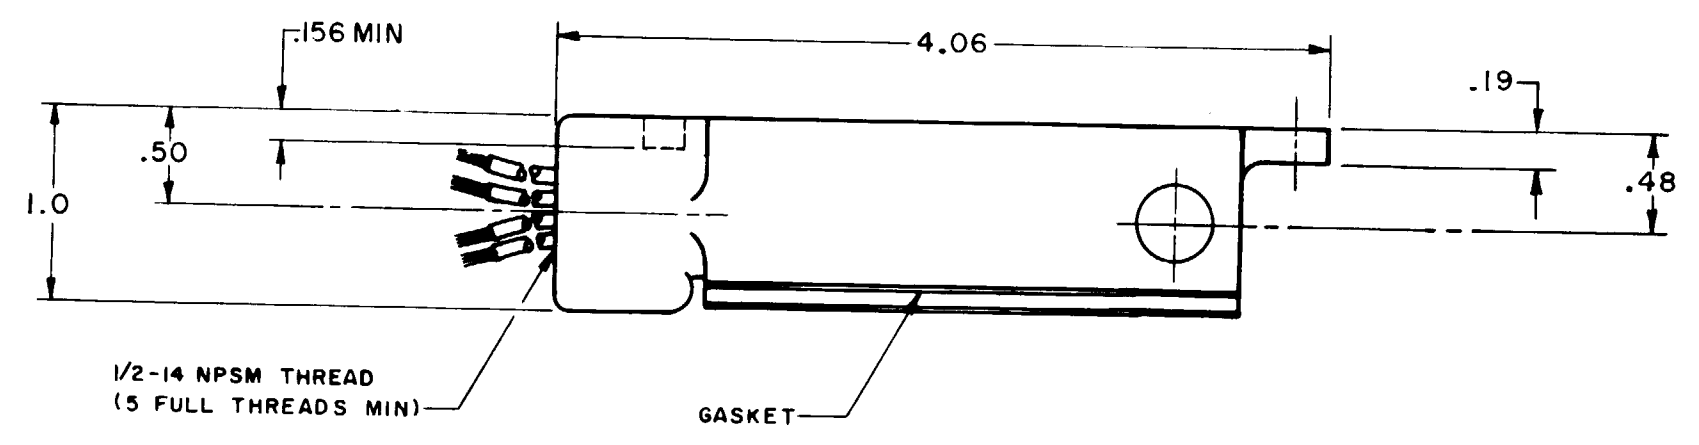

NOTE -
1 - DOWEL HOLES WILL ACCEPT .187 MAX DIA DOWEL PINS ON 3.250 X .375 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL
	CONTACT ARRANGEMENT		DO NOT SCALE PRINT
	(SEE CIRCUIT DIAGRAM)		UNLESS OTHERWISE SPECIFIED
			DIMENSIONS ARE IN INCHES
OPERATING FORCE----- 6 LB MAX	-L25- 10 A-125 OR 250 VAC 1/2 HP-125 VAC RU		TOLERANCES ARE:
RELEASE FORCE----- 1 LB MIN			ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL-----.030 MAX			TWO PLACE (.00) ±.015
OVERTRAVEL------.172 MIN			THREE PLACE (.000) ±.005
			ANGLES ±
			WEIGHT