



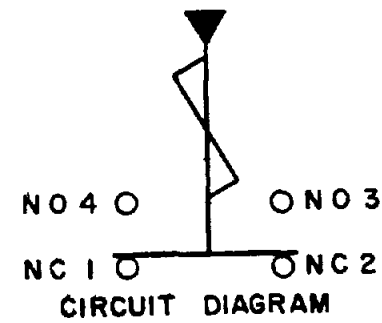


OPERATING HEAD MOUNTS
IN ANY OF FOUR
POSITIONS



-CAPTIVE COVER SCREW (3)

 $.410 \pm .030 -$

→ | ← .285 ± .003

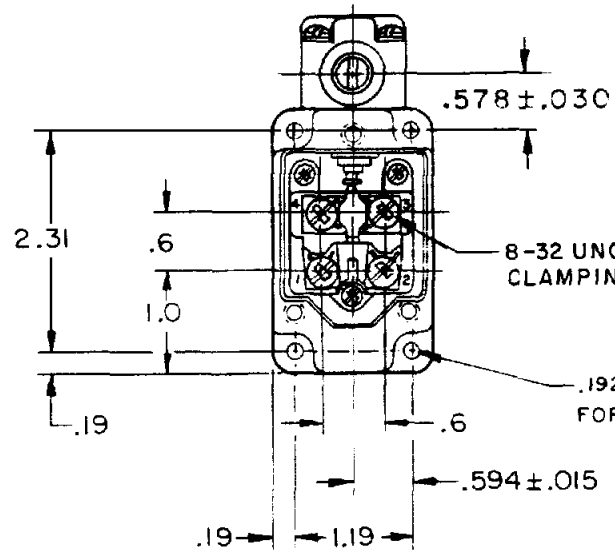

HARDENED CORROSION
RESISTANT STEEL SHAFT
STRAIGHT KNURL—

 $8 \pm .030$


- 8-32 UNC PAN HEAD SCREW AND
CLAMPING PRESSURE PLATE (4)

— .192 MIN DIA MTG HOLE
FOR NO. 10 SCREW (4)

.015

.19- -1.19-

1/2-14 NPT THREAD $\triangle 3$


$$.850 \pm .030$$

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING TORQUE — 4 1/2 IN LB MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
FULL OVERTRAVEL TORQUE — 6 IN LB MAX		UNLESS OTHERWISE NOTED: DIMENSIONS ARE IN INCHES
RELEASE TORQUE — — — 3/4 IN LB MIN	10A-120, 240, OR 480 VAC, 1/3 HP - 120 VAC 3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC .1A - 550 VDC PILOT DUTY: 600 VAC MAX	TOLERANCES ARE:
PRETRAVEL — — — — 20° MAX		ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL — — — 12° MAX		TWO PLACE (.00) ±.015
OVERTRAVEL — — — — — 30° MIN		THREE PLACE (.000) ±.005
RELEASE TRAVEL — — — — 5° MIN		ANGLES ±
SWITCH-BASIC REPLACEMENT — — — 2 MIN		WEIGHT

NOTES

- 1 - SWITCH IS ASSEMBLED FOR ACTUATION IN EITHER DIRECTION BUT MAY BE ADJUSTED TO ACTUATE THE SWITCH IN THE CLOCKWISE DIRECTION ONLY. THE COUNTERCLOCKWISE DIRECTION ONLY, OR IN BOTH DIRECTIONS
- 2 - TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION
- 3 - SEAL TO BE FURNISHED BY USER

3 ACTUATION
SEAL TO BE FURNISHED BY USER