
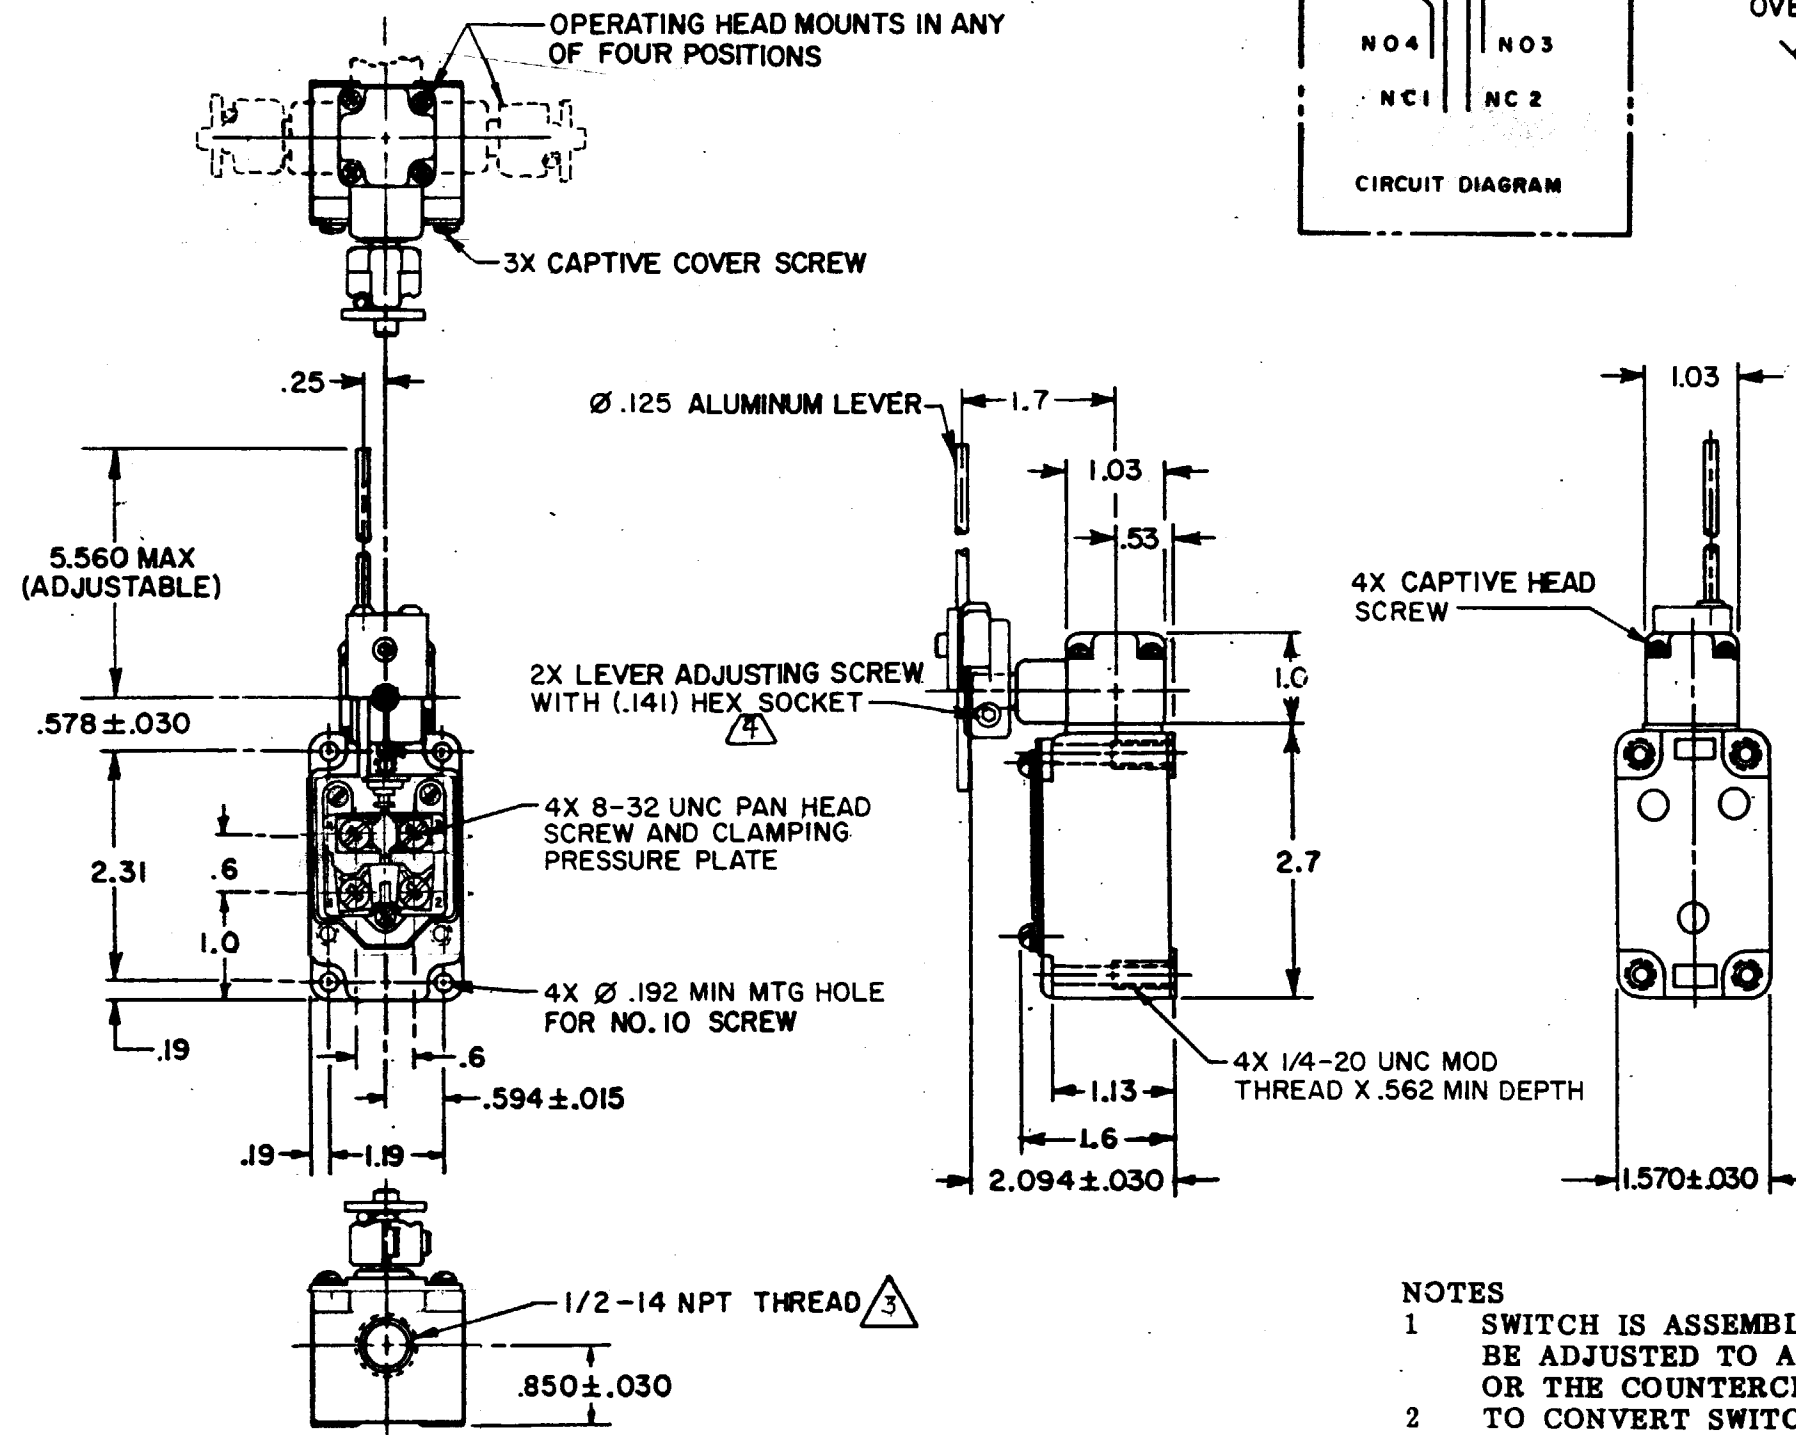
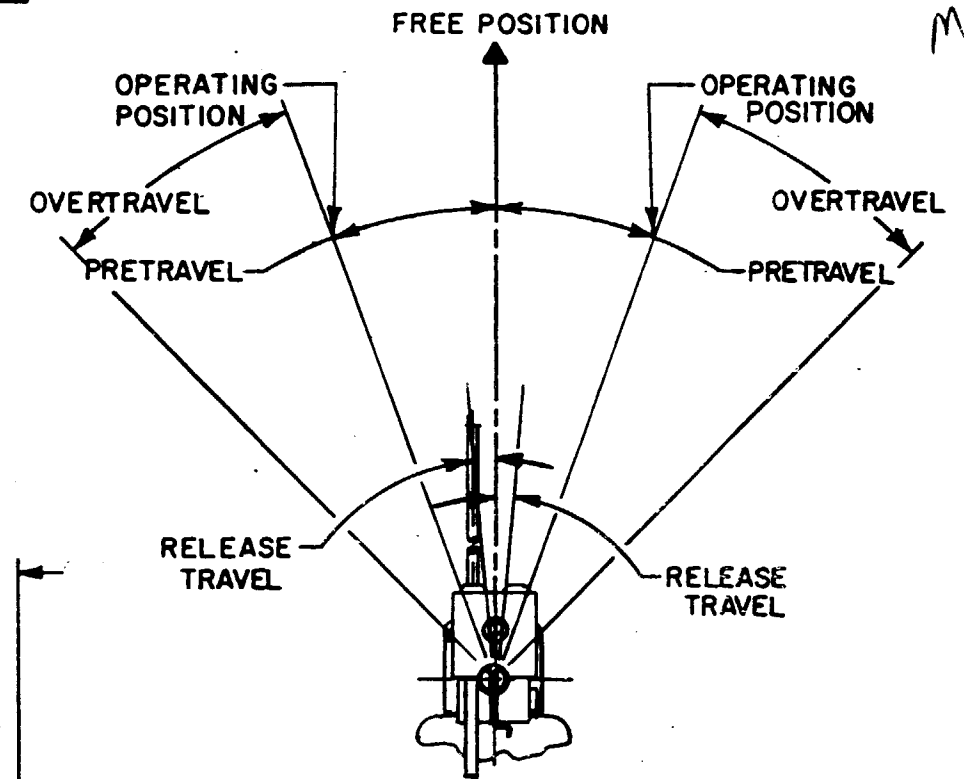


FED. MFG. CODE 91929

1LS47



NOTES

- 1 SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
- 2 TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION

3
4
5

LEVER MAY BE LOCKED IN ANY POSITION THRU 360°
LEVER FURNISHED UNASSEMBLED IN UNIT PACKING BOX

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING TORQUE ----- 1.7 IN-LB MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
FULL OVERTRAVEL TORQUE ----- 2.4 IN-LB MAX		UNLESS OTHERWISE NOTED
RELEASE TORQUE ----- .35 IN-LB MIN	10A - 120, 240 OR 480 VAC	DIMENSIONS ARE IN INCHES
PRETRAVEL ----- 5° MAX	1/4 HP - 120 VAC; 1/2 HP - 240 VAC	TOLERANCES ARE:
	PILOT DUTY: 600 VAC MAX	ONE PLACE (.01) ±.03
OVERTRAVEL ----- 30° MIN		TWO PLACE (.001) ±.01
RELEASE TRAVEL ----- 0°30' MIN		THREE PLACE (.000) ±.00
SWITCH-BASIC REPLACEMENT ----- 2MN8		ANGLES ±
		WEIGHT

WEIGHT

ANSI Y14.5M-1982 APPLIES