

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH-TOGGLE

INT1 SERIES CHART 2

CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

AVAILABLE
LOCKING
COMBINATIONS
FOR CONFIGURATION
SEE LETTERED
DETAILS

4
CATALOG
LISTING

5
CIRCUIT MADE WITH
TOGGLE LEVER IN
KEYWAY
SIDE
(1-2)
CENTER
(1-2)
OPPOSITE
KEYWAY
(2-3)


ELECTRICAL DATA

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"
CE
UL

L192 10A 125, 250, 277 VAC
1/4HP 125 VAC
1/2HP 250, 277 VAC
3A 125 VAC "L"
CE
UL

A,B,D,E,F,G,H,J,K,L,M,N,P	INT1-1	ON	OFF	ON
D,F,G	INT1-2	OFF	NONE	ON
D,F,G	INT1-3	ON	NONE	ON
E,F,K,M	INT1-21	NONE	OFF	ON
E,F,K,M	INT1-31	NONE	ON	ON
F	INT1-4	MOM OFF	NONE	ON
E,F,K,L,M,N	INT1-5	MOM ON	OFF	ON
F	INT1-6	MOM ON	NONE	OFF
E,L,N	INT1-7	MOM ON	OFF	MOM ON
F	INT1-8	MOM ON	NONE	ON
E	INT1-51	NONE	ON	MOM ON
E	INT1-61	MOM ON	OFF	NONE

"A" LOCKED IN THREE POSITIONS	"B" LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE)	"D" LOCKED OUT OF CENTER POSITION	"E" LOCKED IN CENTER POSITION	"F" LOCKED IN EXTREME POS. (OPP. KEYWAY)	"G" LOCKED IN EXTREME POS. (KEYWAY SIDE)
"H" LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE)	"J" LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY)	"K" LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY)	"L" LOCKED OUT OF EXTREME POS. (KEYWAY SIDE)	"M" LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY)	"N" LOCKED OUT OF EXTREME POS. (OPP. KEYWAY)
"P" LOCKED OUT OF AND INTO EXTREME POS. (KEYWAY SIDE)					

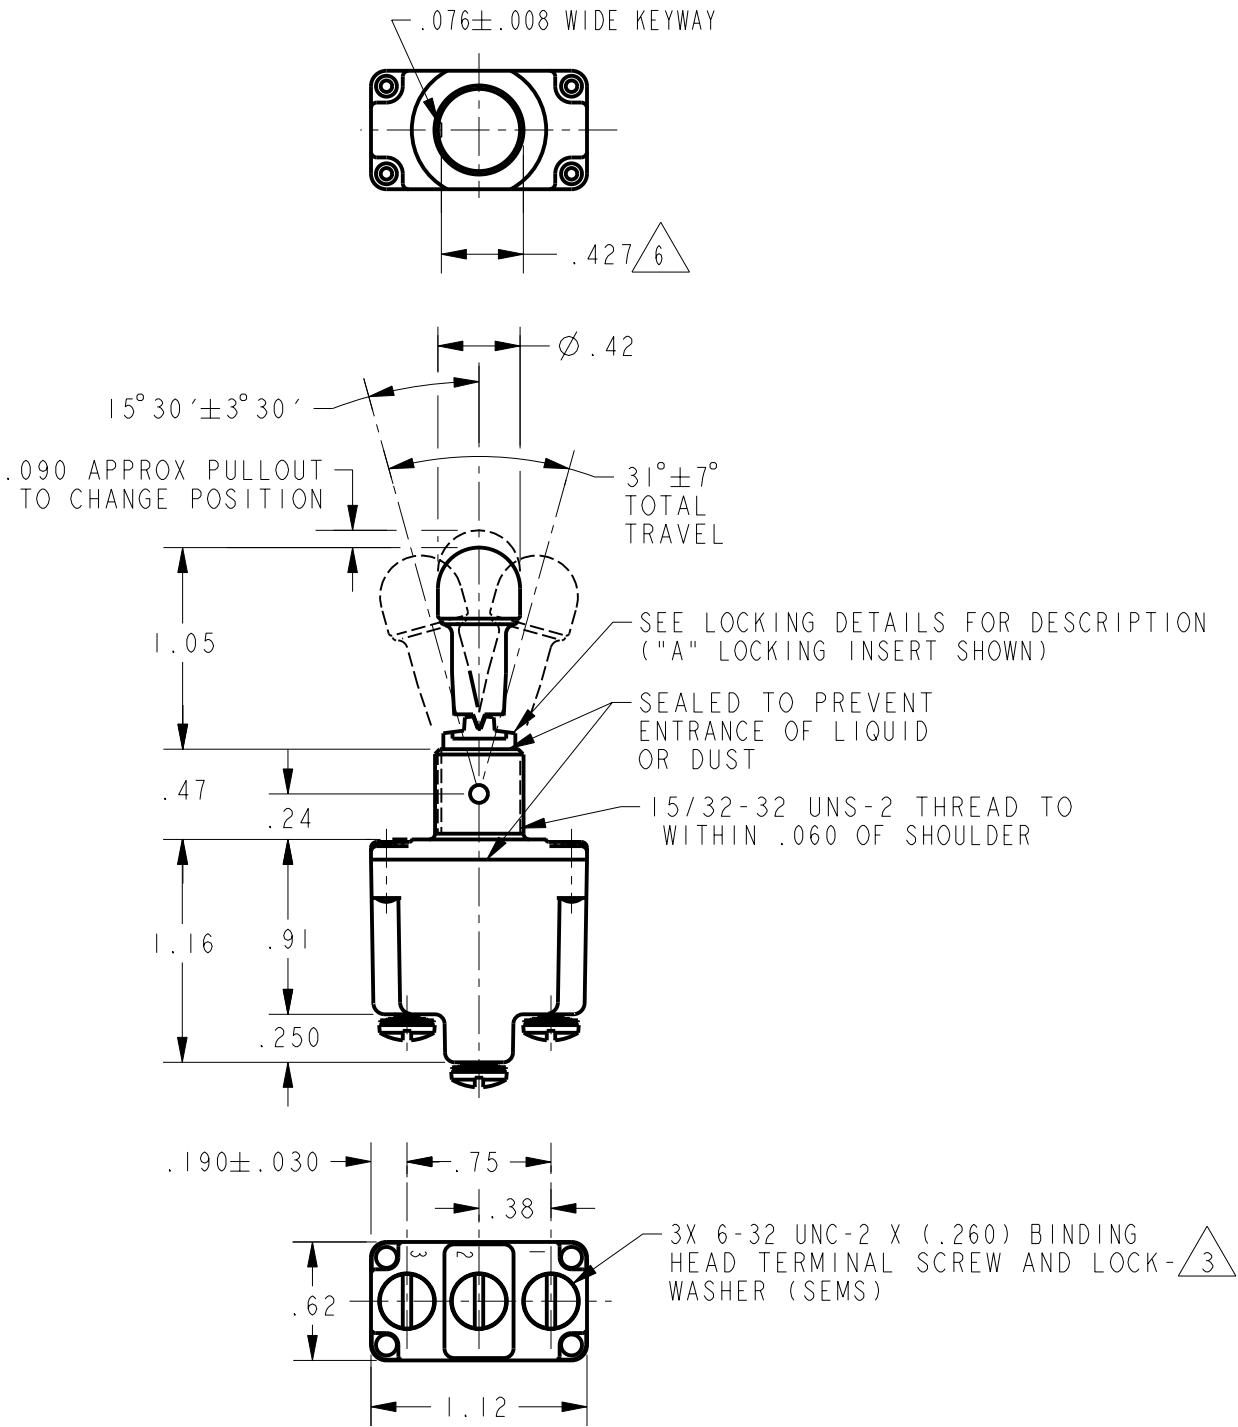

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
- 5 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
- 6 - FROM BOTTOM OF KEYWAY TO MAJOR DIA OF 15/32 THREAD

ANSI Y14.5M-1982 APPLIES

LOCKING RING 3

LOCKWASHER 3

2X HEX NUT 3

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005

ANGLES ±

WEIGHT .08 LBS APPROX