

PTC/CAD 2D

DRAWN

TSM

29OCT99

CHECK

SAV

29OCT99

CHECK

REVISIONS

A

207782

C S L

27 MAR 03

ISSUE

2

CATALOG LISTING

M

CATALOG LISTING

INT231 SERIES CHART 1

PAGE 1 OF 1

RELEASE NO. PR-24251

REPLACES -

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929




SWITCH - TOGGLE

INT231 SERIES CHART 1

CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN 4			ELECTRICAL DATA
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	
INT231-1	ON	OFF	ON	LI91 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L"
INT231-2	OFF	NONE	ON	
INT231-3	ON	NONE	ON	
INT231-21	NONE	OFF	ON	
INT231-31	NONE	ON	ON	
INT231-4	MOM OFF	NONE	ON	LI92 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L"
INT231-5	MOM ON	OFF	ON	
INT231-6	MOM ON	NONE	OFF	
INT231-7	MOM ON	OFF	MOM ON	
INT231-8	MOM ON	NONE	ON	
INT231-51	NONE	ON	MOM ON	
INT231-61	MOM ON	OFF	NONE	

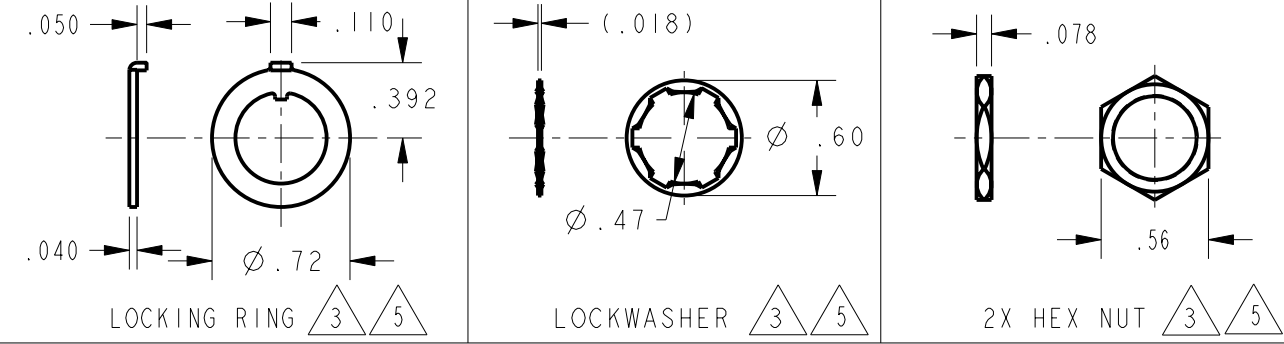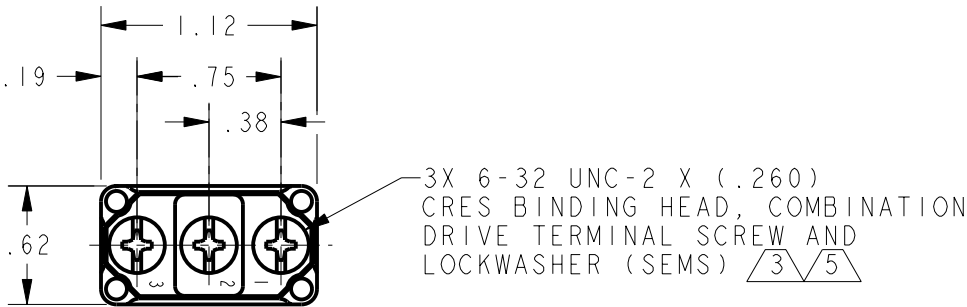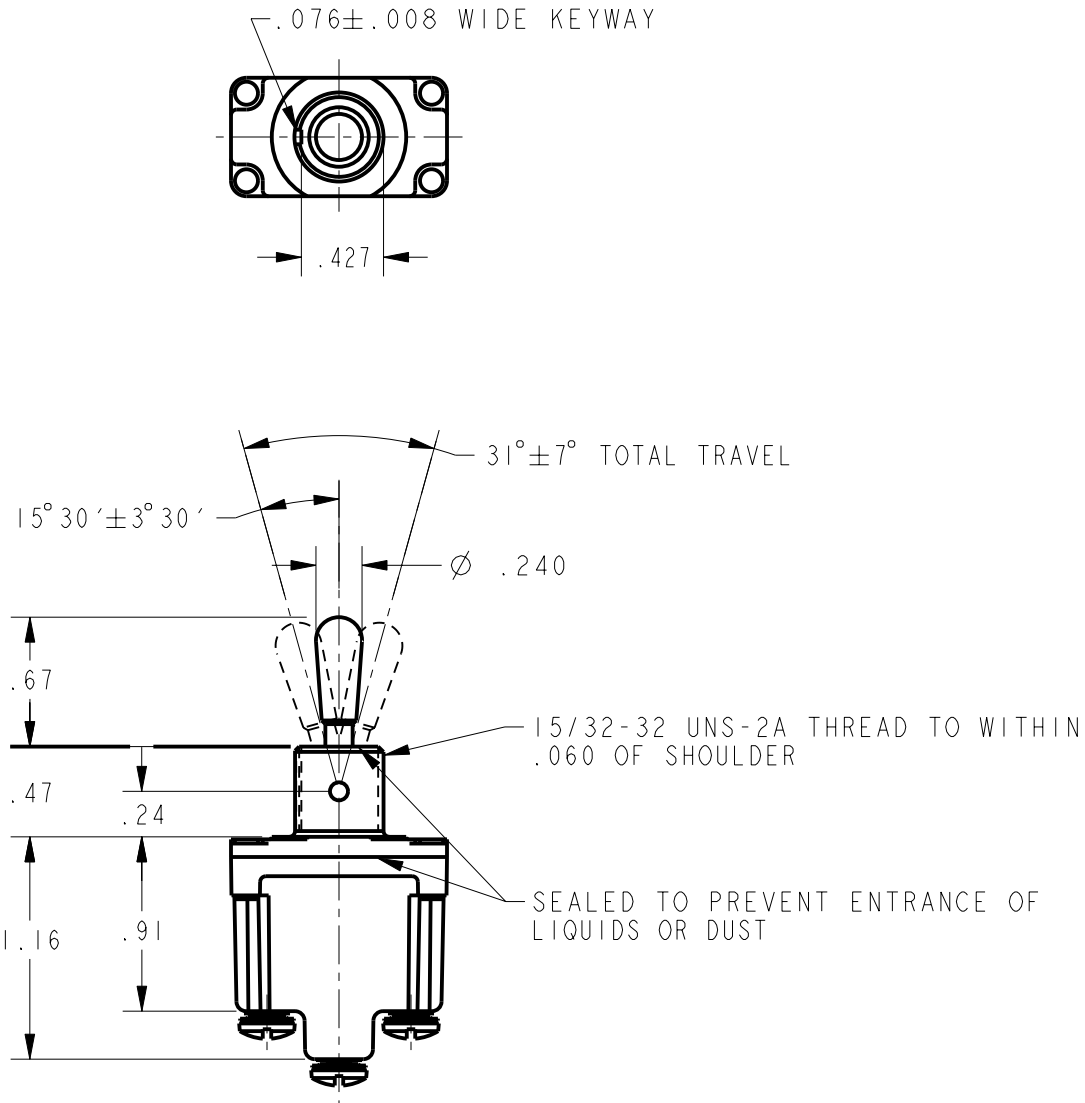

NOTES

- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
- 3

 FURNISHED UNASSEMBLED
- 4

 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
- 5

 NH SUFFIX MUST BE ADDED TO SPECIFY NO HARDWARE (EX INT1-1-NH)

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	.07 LB APPROX

ANSI Y14.5M-1982 APPLIES