


MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
INT887 SERIES
CHART 2


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

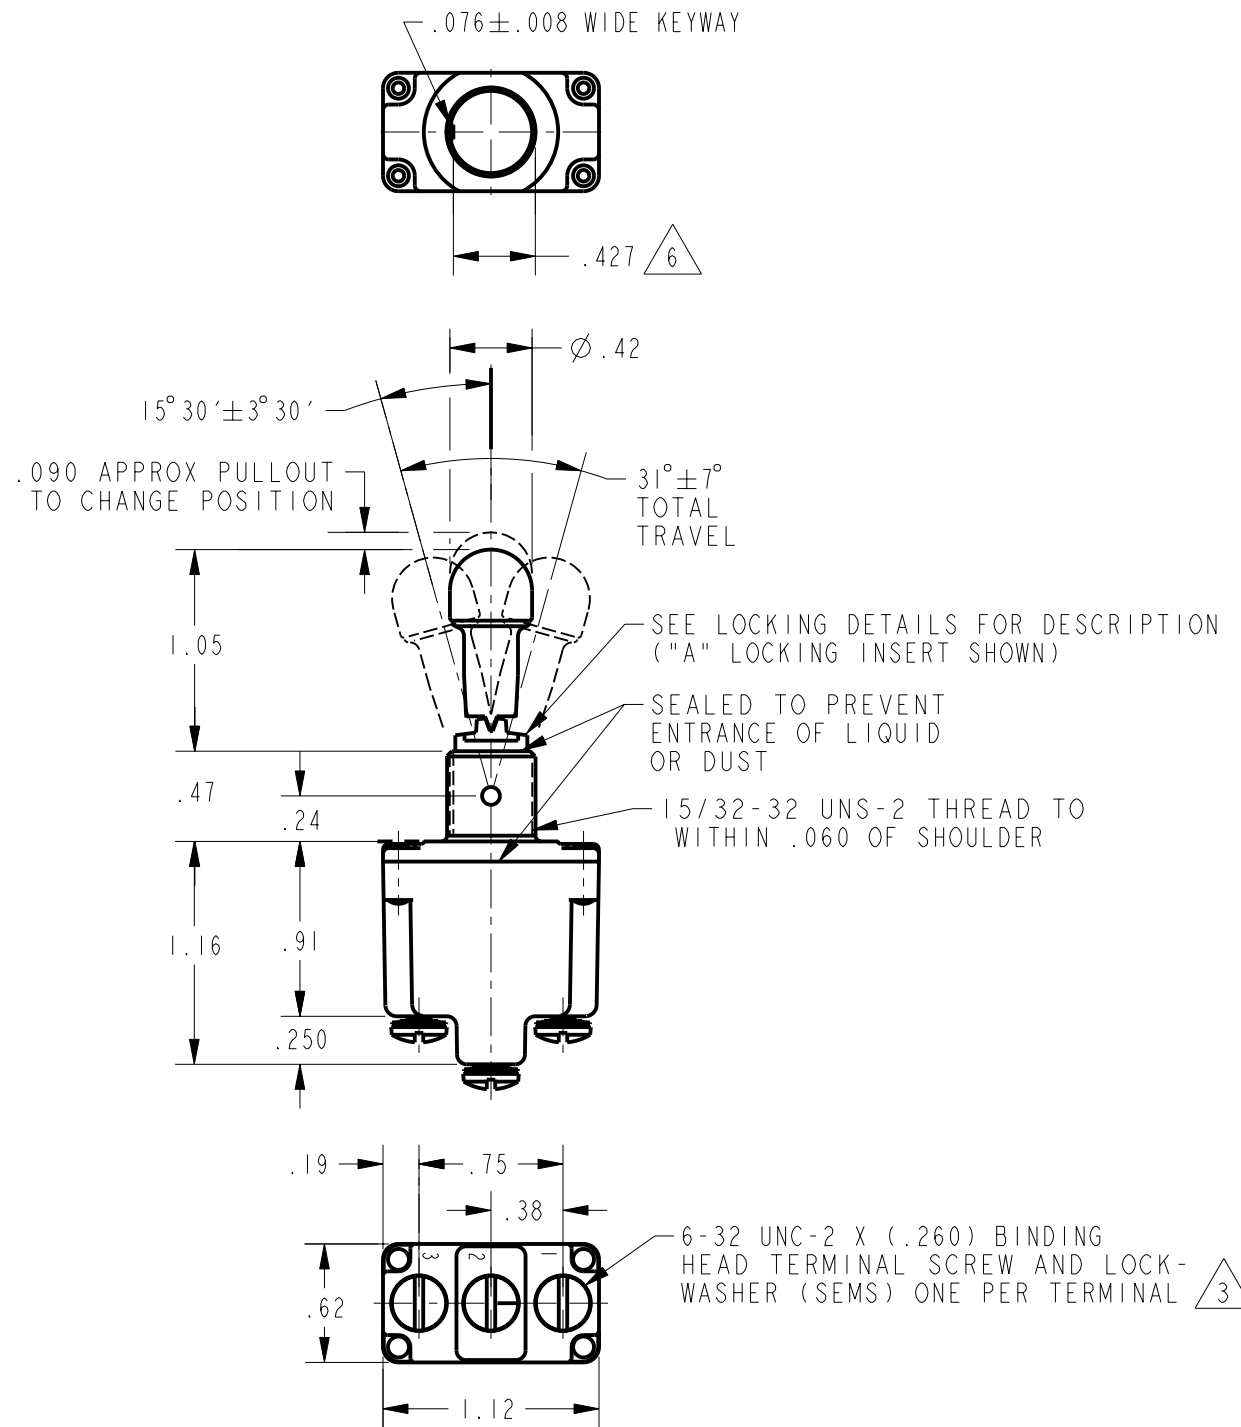

- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH FURNISHED UNASSEMBLED
 - 3 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
 - 4 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - 5 - FROM BOTTOM OF KEYWAY TO MAJOR DIA OF 15/32 THREAD
 - 6 -

ANSI Y14.5M-1982 APPLIES

| ELECTRICAL DATA | | AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS | <div>4</div> CATALOG LISTING | CIRCUIT MADE WITH TOGGLE LEVER IN | | | | | | | | | | | | | |
|---|---------------------------|--|------------------------------|-----------------------------------|---|--------------------------|-------------------------|---|-----|--|--|-----|--|---|-----|--|--|
| | | | | KEYWAY SIDE (1-2) | CENTER (1-2) | OPPOSITE KEYWAY (2-3) | | | | | | | | | | | |
| L191 15A 125, 250, 277 VAC 1/2HP 125 VAC 1HP 250, 277 VAC 5A 125 VAC "L" <div>CE</div> <div>UL</div> <div>CS</div> | A,B,D,E,F,G,H,J,K,L,M,N,P | INT887-1 | ON | OFF | ON | | | | | | | | | | | | |
| | D,F,G | INT887-2 | OFF | NONE | ON | | | | | | | | | | | | |
| | D,F,G | INT887-3 | ON | NONE | ON | | | | | | | | | | | | |
| | E,F,K,M | INT887-21 | NONE | OFF | ON | | | | | | | | | | | | |
| | E,F,K,M | INT887-31 | NONE | ON | ON | | | | | | | | | | | | |
| L192 10A 125, 250, 277 VAC 1/4HP 125 VAC 1/2HP 250, 277 VAC 3A 125 VAC "L" <div>CE</div> <div>UL</div> <div>CS</div> | F | INT887-4 | MOM OFF | NONE | ON | | | | | | | | | | | | |
| | E,F,K,L,M,N | INT887-5 | MOM ON | OFF | ON | | | | | | | | | | | | |
| | F | INT887-6 | MOM ON | NONE | OFF | | | | | | | | | | | | |
| | E,L,N | INT887-7 | MOM ON | OFF | MOM ON | | | | | | | | | | | | |
| | F | INT887-8 | MOM ON | NONE | ON | | | | | | | | | | | | |
| | E | INT887-51 | NONE | ON | MOM ON | | | | | | | | | | | | |
| | E | INT887-61 | MOM ON | OFF | NONE | | | | | | | | | | | | |
| "A" | | LOCKED IN THREE POSITIONS | "B" | | LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE) | "D" | | LOCKED OUT OF CENTER POSITION | "E" | | LOCKED IN CENTER POSITION | "F" | | LOCKED IN EXTREME POS. (OPP. KEYWAY) | "G" | | LOCKED IN EXTREME POS. (KEYWAY SIDE) |
| "H" | | LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE) | "J" | | LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY) | "K" | | LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY) | "L" | | LOCKED OUT OF EXTREME POS. (KEYWAY SIDE) | "M" | | LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY) | "N" | | LOCKED OUT OF EXTREME POS. (OPP. KEYWAY) |
| "P" | | LOCKED OUT OF AND INTO EXTREME POS. (KEYWAY SIDE) | | | | | | | | | | | | | | | |
| | | LOCKING RING <div>3</div> | | | LOCKWASHER <div>3</div> | | 2X HEX NUT <div>3</div> | | | | | | | | | | |

| THIRD ANGLE PROJECTION | |
|---|----------------|
|  | |
| SCALE | FULL |
| DO NOT SCALE PRINT | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | |
| ONE PLACE | (.0) ±.030 |
| TWO PLACE | (.00) ±.015 |
| THREE PLACE | (.000) ±.005 |
| ANGLES | ± |
| WEIGHT | .08 LBS APPROX |