

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

**ASSEMBLY-
PUSHBUTTON SWITCH**

CATALOG LISTING

IPB42**IPB42**

PAGE 1 OF 1

MDRAWING
NUMBER

ISSUE

8

REVISIONS

A CO19743

M B F

30 MAR 65

B CO 20470

M B F

2 SEP 65

C CO95143

DLT

14 JUL 99

REPLACES

RELEASE NO.



CHECK

CHECK

CHECK


CHECK

CHECK

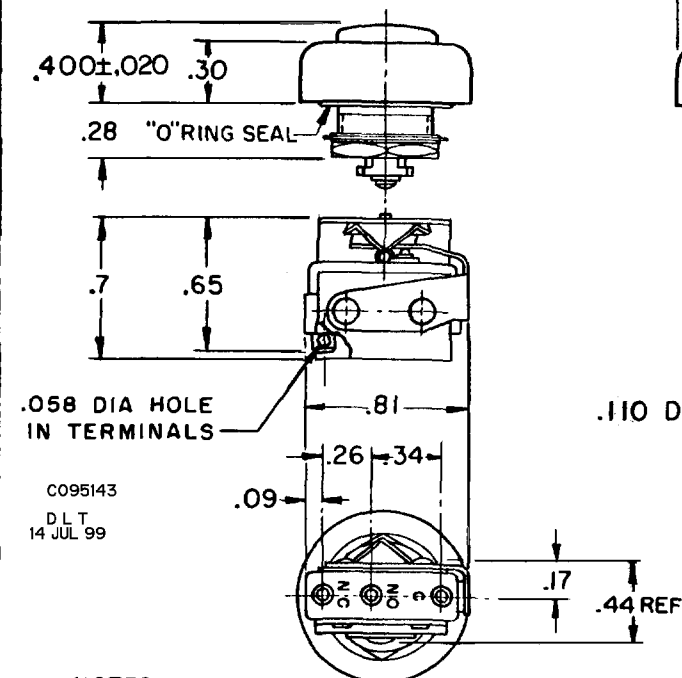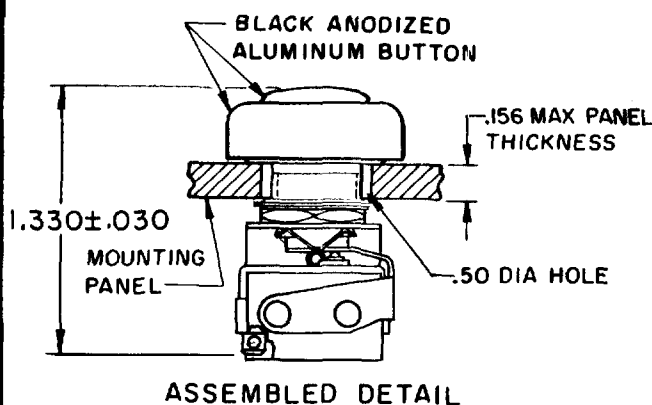

NOTES

- 1- UNIT INCLUDES CATALOG LISTING "ISM" TYPE BASIC SWITCH
- 2 SPRING LATCH PERMITS ASSEMBLY AND DISASSEMBLY AS REQUIRED
- 3 "D" SHAPED HOLE IN SPRING LATCH PREVENTS ROTATION BETWEEN THE TWO PARTS
- 4- ASSEMBLY IS COMPLETED AFTER INSTALLING BUTTON TO PANEL
- 5- TERMINALS ARE PLATED FOR SOLDERING

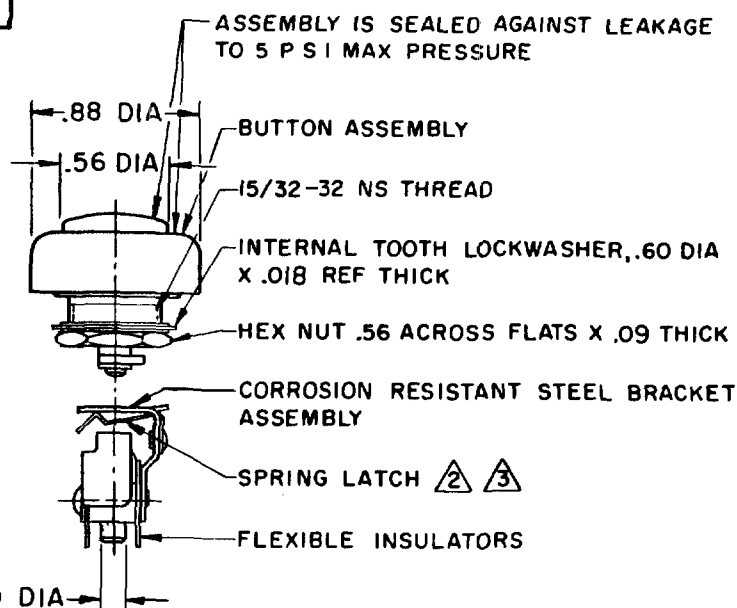

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICSOPERATING FORCE — — — — 2 LB MAX
PLUNGER TRAVEL — — — .062 APPROX**ELECTRICAL DATA**CONTACT ARRANGEMENT
S P D T250 VAC — — — — — 5 AMP
30 VOLTS DC RATING
INDUCTIVE — — — — — SEA LEVEL — — — 3 AMP
50,000 FT — — — 2.5 AMP
RESISTIVE — — — — — SEA LEVEL — — — 5 AMP
50,000 FT — — — 5 AMP
MAXIMUM INRUSH — — — — — 24 AMP**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT

FO-50378 FORMTEK

DRAWN

M B F 30 MAR 65