


# ASSEMBLY - PUSHBUTTON SWITCH

CATALOG LISTING  
**IPB533**

CATALOG LISTING  
**IPB533**  
 PAGE 1 OF 1  
**M**  
 DRAWING NUMBER  
**4**  
 ISSUE  
 REVISIONS  
 A 201143  
 CSL  
 1 SEP 00  
 B 201411  
 CSL  
 2 OCT 00  
 C 0018502  
 PM  
 27 FEB 06  
 CHECK  
 66  
 5 AUG 66  
 L S D  
 66  
 4 AUG 66  
 OMW  
 4 AUG 66  
 DRAWN  
 RASTER  
 FO-80378

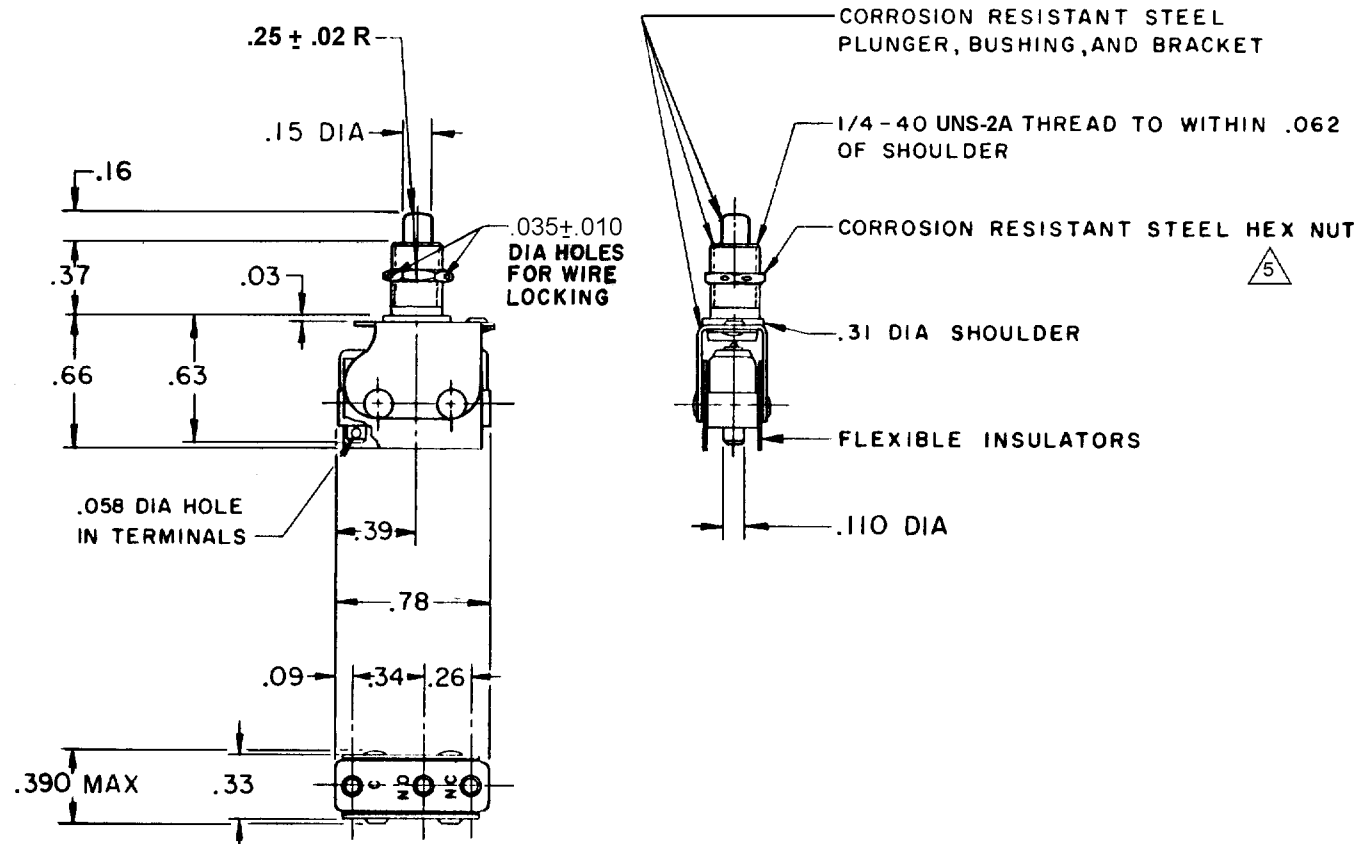

- NOTES
- 1 - UNIT INCLUDES "11SM" TYPE BASIC SWITCH
  - 2 - TERMINALS ARE PLATED FOR SOLDERING
  - 3 - RECOMMENDED FOR MANUAL OPERATION ONLY
  - 4 - FOR USE IN TEMPERATURE RANGE -65° F TO +400° F
- △ 5 MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ---- 1 LB APPROX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
	250 VAC ---- 5 AMP	UNLESS OTHERWISE NOTED
	30 VOLTS DC RATING	DIMENSIONS ARE IN INCHES
	INDUCTIVE ---- SEA LEVEL ---- 3 AMP	<b>TOLERANCES ARE:</b>
	50,000 FT ---- 2.5 AMP	ONE PLACE (.0) ±.030
	RESISTIVE ---- SEA LEVEL ---- 5 AMP	TWO PLACE (.00) ±.015
	50,000 FT ---- 5 AMP	THREE PLACE (.000) ±.005
OVERTRAVEL ----- .140 APPROX	MAXIMUM INRUSH ---- 24 AMP	ANGLES ±
		WEIGHT